



TEMPORARY CONTROLLER SEQUENCE

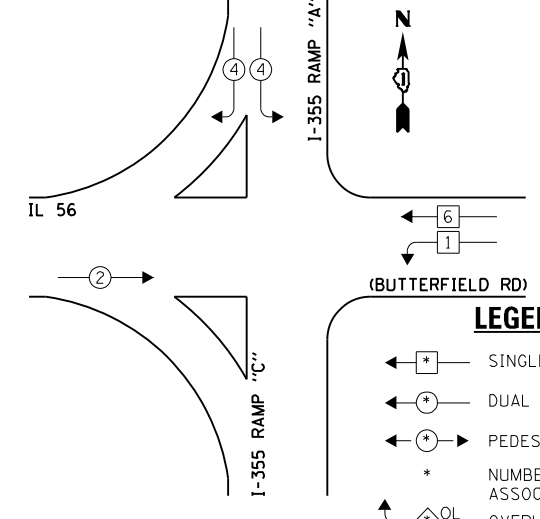

TEMPORARY PHASE DESIGNATION DIAGRAM

TEMPORARY EMERGENCY VEHICLE PREEMPTION SEQUENCE

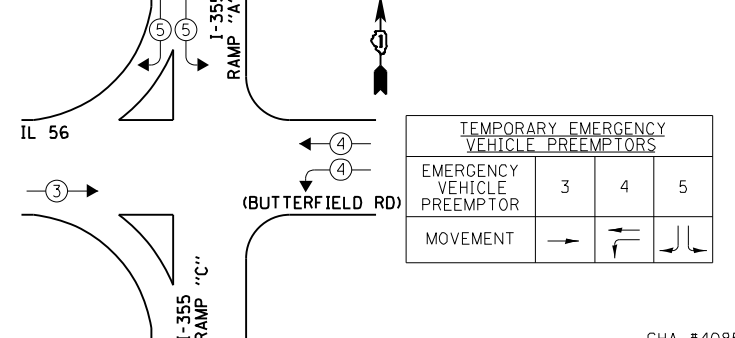

I.D.O.T. TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					TOTAL WATTAGE
TYPE	NO. LAMPS	INCAND.	L.E.D.	OPERATION	
SIGNAL (RED)	15	135	17	0.50	127.5
SIGNAL (YELLOW)	15	135	25	0.25	93.75
SIGNAL (GREEN)	17	135	15	0.25	63.75
ARROW	-	135	12	0.10	-
PED. SIGNAL	-	90	25	1.00	-
CONTROLLER	1	-	100	1.00	100.0
LUMINAIRE	-	-	250	0.50	-
L.E.D. ST. NAME SIGN	-	-	64	0.50	-
VIDEO SYSTEM	-	-	150	1.00	-
BATTERY BACKUP	1	-	25	1.00	25.0
ILLUMINATED SIGN	-	-	25	0.05	-
TOTAL =					410.0

THE TRAFFIC SIGNAL CONTROL EQUIPMENT FOR THIS PROJECT SHALL BE "ECONOLITE" TO MATCH THE EXISTING ADJACENT SYSTEM.

ENERGY COSTS - BILLED TO: IL DEPT. OF TRANSPORTATION
 (ADDRESS) 201 W. CENTER COURT
 (ADDRESS) SCHALMBURG, IL 60196-1096
 ENERGY SUPPLY - CONTACT: IL YAS MOHIUDDIN
 PHONE: 708-235-2692
 COMPANY: COMED - UNIVERSITY PARK

FILE NAME = 60T98-16-IL56West Ramp-Temp.Cable.dgn	USER NAME = jwouife	DESIGNED - JRD	REVISED - _____
	PLOT SCALE = 1:20	DRAWN - PJS	REVISED - _____
	PLOT DATE = 4/26/2013	CHECKED - KLB	REVISED - _____
		DATE - _____	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY CABLE PLAN, TEMPORARY PHASE DESIGNATION DIAGRAM, & TEMPORARY VEHICLE PREEMPTION SEQUENCE
 IL 56 (BUTTERFIELD RD) AT I-355 SB RAMPS
 SCALE: NONE SHEET ___ OF ___ SHEETS STA. ___ TO STA. ___

F.A.P. RTE. 365	SECTION (56R-2) TS	COUNTY DuPAGE	TOTAL SHEETS 33	SHEET NO. 16
CONTRACT NO. 60T98			ILLINOIS FED. AID PROJECT	

GHA #4085.885