CONTRACT NO. 72B23

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
67	*	SANGAMON	8	4
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

* - SECTON D-6 BUILDING DEMOLITION 2008-01

ASBESTOS CONTAINING MATERIAL TO BE REMOVED - PARCEL # 6281113 (BUILDING NO. 1)

MATERIAL NO.	MATERIAL DESCRIPTION	LOCATION	FRIABLE	ASBESTOS TYPE	ASBESTOS %	QUANTITY - SQ FT
5	MULTYLAYER FLAT BUILTUP ROOFING	BUILDING 2 - EASTSIDE	NO	CHRYSOTILE	4%	1609
6	MULTYLAYER FLAT BUILTUP ROOFING	BUILDING 2 - SOUTHSIDE	NO	CHRYSOTILE	3%	630
7	VENT FLASHING	BUILDING 1 & 2 - VENTS	NO	CHRYSOTILE	7%	25
9	TRANSIT PANELS / BACKING FELT	BUILDING 1 - EXTERIOR WALL	NO	CHRYSOTILE	25%	848
11	9" X 9" YELLOW/WHITE STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 109	NO	CHRYSOTILE	4%	78
12	9" X 9" RED/WHITE STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 109, 111, 115	NO	CHRYSOTILE	4%	234
18	TRANSIT PANEL	BETWEEN SHARED BEDROOM WALL, ROOMS 109, 110, 111, 112	NO	CHRYSOTILE	25%	364
21	9" X 9" GREEN/BLACK/WHITE VINYL FLOOR TILE/MASTIC	ROOMS 111 & 115	NO	CHRYSOTILE	5% TILE	156
22	9" X 9" GREEN WITH WHITE STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 110, 112, 116	NO	CHRYSOTILE	6% TILE	234
23	9" X 9" BEIGE WITH BROWN & WHITE STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 110, 112, 116	NO	CHRYSOTILE	6% TILE	234
30	WINDOW CAULK	GUESTROOM WINDOWS	NO	CHRYSOTILE	3%	133

ASBESTOS CONTAINING MATERIAL TO BE REMOVED - PARCEL # 6281113 (BUILDING NO. 2)

MATERIAL NO.	MATERIAL DESCRIPTION	LOCATION	FRIABLE	ASBESTOS TYPE	ASBESTOS %	QUANTITY - SQ FT
4	9" X 9" TAN WITH BROWN/TAN SPLOTCHES VINYL FLOOR TILE/MASTIC	ROOMS 117, 118, 119, 120, 121, 122	NO	CHRYSOTILE	7% TILE	11877
8	YELLOW BLACK PATTERN VINYL SHEET FLOORING	ROOM 117	NO	CHRYSOTILE	10%	55
10	12" X 12" TAN/BLACK RECTANGLE PATTERN VINYL FLOOR TILE/MASTIC	ROOM 117	NO	CHRYSOTILE	4% TILE	55
13	BROWN MARBLE/DIAMOND/SQUARE PATTERN VINYL SHEET FLOORING	ROOMS 119, 122, 123	NO	CHRYSOTILE	10%	175
17	YELLOW/BLACK/TAN VINYL SHEET FLOORING	ROOM 120	NO	CHRYSOTILE	10%	55
21	YELLOW COBBLESTONE VINYL SHEET FLOORING	ROOM 121	NO	CHRYSOTILE	10%	55
23	9" X 9" GREEN/WHITE VINYL FLOOR TILE/MASTIC	ONE BEDROOM APT	NO	CHRYSOTILE	6% TILE 5% MASTIC	50
24	9" X 9" TAN/BROWN SPLOTCHES VINYL FLOOR TILE/MASTIC	ONE BEDROOM APT	NO	CHRYSOTILE	8% TILE 5% MASTIC	50
25	9" X 9" WHITE/BLACK VINYL FLOOR TILE/MASTIC	ONE BEDROOM APT	NO	CHRYSOTILE	2% TILE 5% MASTIC	140
27	WINDOW CAULK	ROOM WINDOWS	NO	CHRYSOTILE	2%	144
28	WINDOW CAULKING	LOUVERED WINDOWS EAST AND SOUTH	NO	CHRYSOTILE	2%	104

ASBESTOS CONTAINING MATERIAL TO BE REMOVED - PARCEL # 6281113 (BUILDING NO. 3)

MATERIAL NO.	MATERIAL DESCRIPTION	LOCATION	FRIABLE	ASBESTOS TYPE	ASBESTOS %	QUANTITY - SQ FT
3	FLASHING	ROOF	NO	CHRYSOTILE	5%	175
4	BROWN ASPHALT SHEETING FELT	LOWER OFFICE, ROOF OVERLAY	NO	CHRYSOTILE	8%	249
7	9" X 9" BEIGE/BROWN/WHITE STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 104, 108	NO	CHRYSOTILE	7% TILE 5% MASTIC	110
8	9" X 9" BEIGE/BROWN/WHITE STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 104, 105, 107, 108	NO	CHRYSOTILE	5% TILE 5% MASTIC	223
9	GREEN/CREAM VINYL SHEET FLOORING MASTIC	ROOMS 104, 105, 107, 108	NO	CHRYSOTILE	10%	84
11	9" X 9" BROWN/ORANGE/WHITE STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 105, 107	NO	CHRYSOTILE	5% TILE 5% MASTIC	121
12	9" X 9" GREEN/WHITE STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 103, 106 AND FIRST FLOOR APT	NO	CHRYSOTILE	5% TILE	137
13	9" X 9" BEIGE/YELLOW/RED STREAKS VINYL FLOOR TILE/MASTIC	ROOMS 103, 106	NO	CHRYSOTILE	5% TILE	134
19	GBEIGE AND GOLD VINYLS SHEET FLOORING MASTIC	ROOM 106	NO	CHRYSOTILE	10%	15
25	9" X 9" BROWN/WHITE SPLOTCHED VINYL FLOOR TILE/MASTIC	LAUNDRY ROOM, FIRT FLOOR APT. OFFICE AND LOBBY	NO	CHRYSOTILE	7% TILE	662
29	YELLOW AND BEIGE OCTOGON DIAMOND PATTERN VINYL SHEET FLOORING	FIRST FLOOR APT	NO	CHRYSOTILE	10%	72

ASBESTOS CONTAINING MATERIAL TO BE REMOVED - PARCEL # 6281113 (BUILDING NO. 4)

MATERIAL NO.	MATERIAL DESCRIPTION	LOCATION	FRIABLE	ASBESTOS TYPE	ASBESTOS %	QUANTITY - SQ FT
1	MULTILAYER ROOFING	ROOF OVER APT 124	NO	CHRYSOTILE	2%	380
17	YELLOW TERAZZO PATTERN VINYL SHEET FLOORING/MASTIC	APT. 124 BATHROOM	NO	CHRYSOTILE	10%	35
18	9"X 9" GREEN/TAN/BROWN VINYL FLOOR TILE/MASTIC	APT. 125 KITCHEN SINK	NO	CHRYSOTILE	7% TILE	2

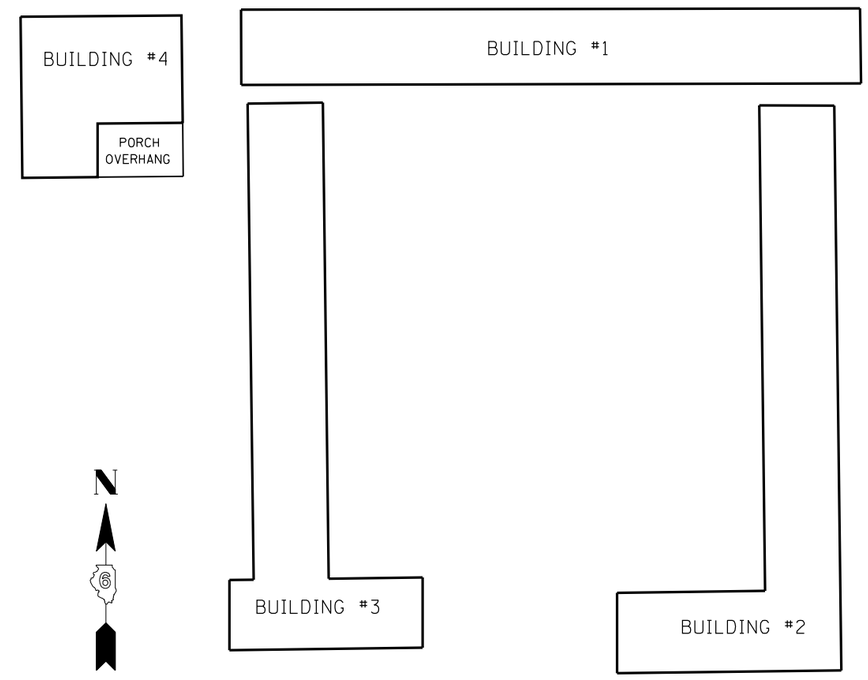

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SCHEDULE OF QUANTITIES

FA ROUTE 67 (CLEARLAKE AVENUE)
SECTON D-6 BUILDING DEMOLITION 2008-01
SANGAMON COUNTY

SCALE: VERT. HORIZ.
DATE MAY 14, 2007
DRAWN BY RTS
CHECKED BY

PLOT DATE = 5/17/2007
FILE NAME = c:\Projects\d610007\shsch.dgn
PLOT SCALE = 142.5412 ' / IN.
USER NAME = bagbjr1