



F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55/70	#	MADISON	19	18
STA. _____		TO STA. _____		
FED. ROAD DIST. NO. _____ ILLINOIS FED. AID PROJECT				
DIST 8 ITS 2007-4a, 4b				

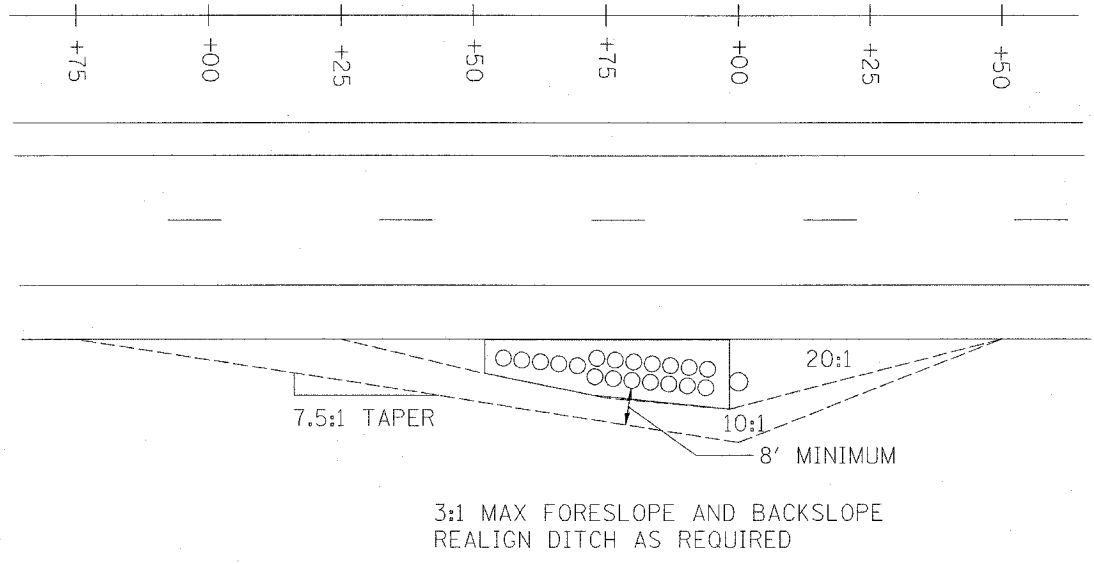

LOCATION	EARTH EXCAVATION	EARTH EXCAVATION ADJUSTED FOR SHRINKAGE	EMBANKMENT	EARTHWORK BALANCE WASTE (+) OR SHORTAGE (-)
	CU YD	CU YD	CU YD	CU YD
<b>FAI 55</b>				
STA 1147+50 TO STA 1147+75	0.0	0.0	0.4	-0.4
STA 1147+75 TO STA 1148+00	0.0	0.0	1.4	-1.4
STA 1148+00 TO STA 1148+25	0.0	0.0	4.7	-4.7
STA 1148+25 TO STA 1148+50	0.0	0.0	10.5	-10.5
STA 1148+50 TO STA 1148+75	0.9	0.7	18.4	-17.7
STA 1148+75 TO STA 1149+00	0.9	0.7	17.1	-16.4
STA 1149+00 TO STA 1149+25	0.0	0.0	5.8	-5.8
<b>FAI 70</b>				
STA 1031+50 TO STA 1031+75	0.8	0.6	9.4	-8.8
STA 1031+75 TO STA 1032+00	3.8	2.9	24.1	-21.3
STA 1032+00 TO STA 1032+25	4.7	3.5	26.4	-22.9
STA 1032+25 TO STA 1032+50	4.1	3.1	19.9	-16.8
STA 1032+50 TO STA 1032+75	0.5	0.4	11.8	-11.4
STA 1032+75 TO STA 1033+00	0.0	0.0	5.0	-5.0
STA 1033+00 TO STA 1033+25	0.0	0.0	1.4	-1.4
<b>TOTALS</b>	<b>15.7</b>	<b>11.8</b>	<b>156.3</b>	<b>-144.5</b>

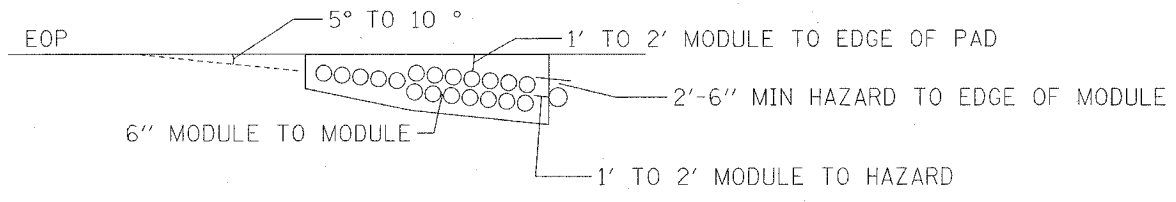

LOCATION	SEEDING	MULCH
	ACRE	ACRE
<b>FAI 55</b>		
STA 1147+50 TO STA 1149+25	0.0	0.0
<b>FAI 70</b>		
STA 1031+50 TO STA 1033+25	0.8	0.6
<b>TOTALS</b>	<b>0.8</b>	<b>0.6</b>

LOCATION	REINFORCEMENT BARS	RELOCATE SIGN PANEL-TYPE 3	STRUCTURAL STEEL SIGN SUPPORT-BREAKAWAY	CONCRETE FOUNDATIONS	RELOCATE GROUND-MOUNTED SIGN SUPPORT	REMOVE GROUND CONCRETE FOUNDATION - GROUND MOUNT	IMPACT ATTENUATORS (NON-REDIRECTIVE), TEST LEVEL 3
	POUND	SO FT	POUND	CU YD	EACH	EACH	EACH
<b>FAI 55</b>							
STA 1148+75							
BUTTERFLY DMS							1
REMOVE "PAUL SIMON" SIGN STA 1068+00	156.0	77.5	75	1.4	2	2	
RELOCATE "PAUL SIMON" SIGN							
<b>FAI 70</b>							
STA 1032+00							
BUTTERFLY DMS							1
<b>TOTALS</b>	<b>156.0</b>	<b>77.5</b>	<b>75.0</b>	<b>1.4</b>	<b>2.0</b>	<b>2.0</b>	<b>2.0</b>

**IMPACT ATTENUATOR DETAILS**

FAI ROUTE 70/55  
DIST 8 ITS 2007-4a, 4b  
MADISON COUNTY