
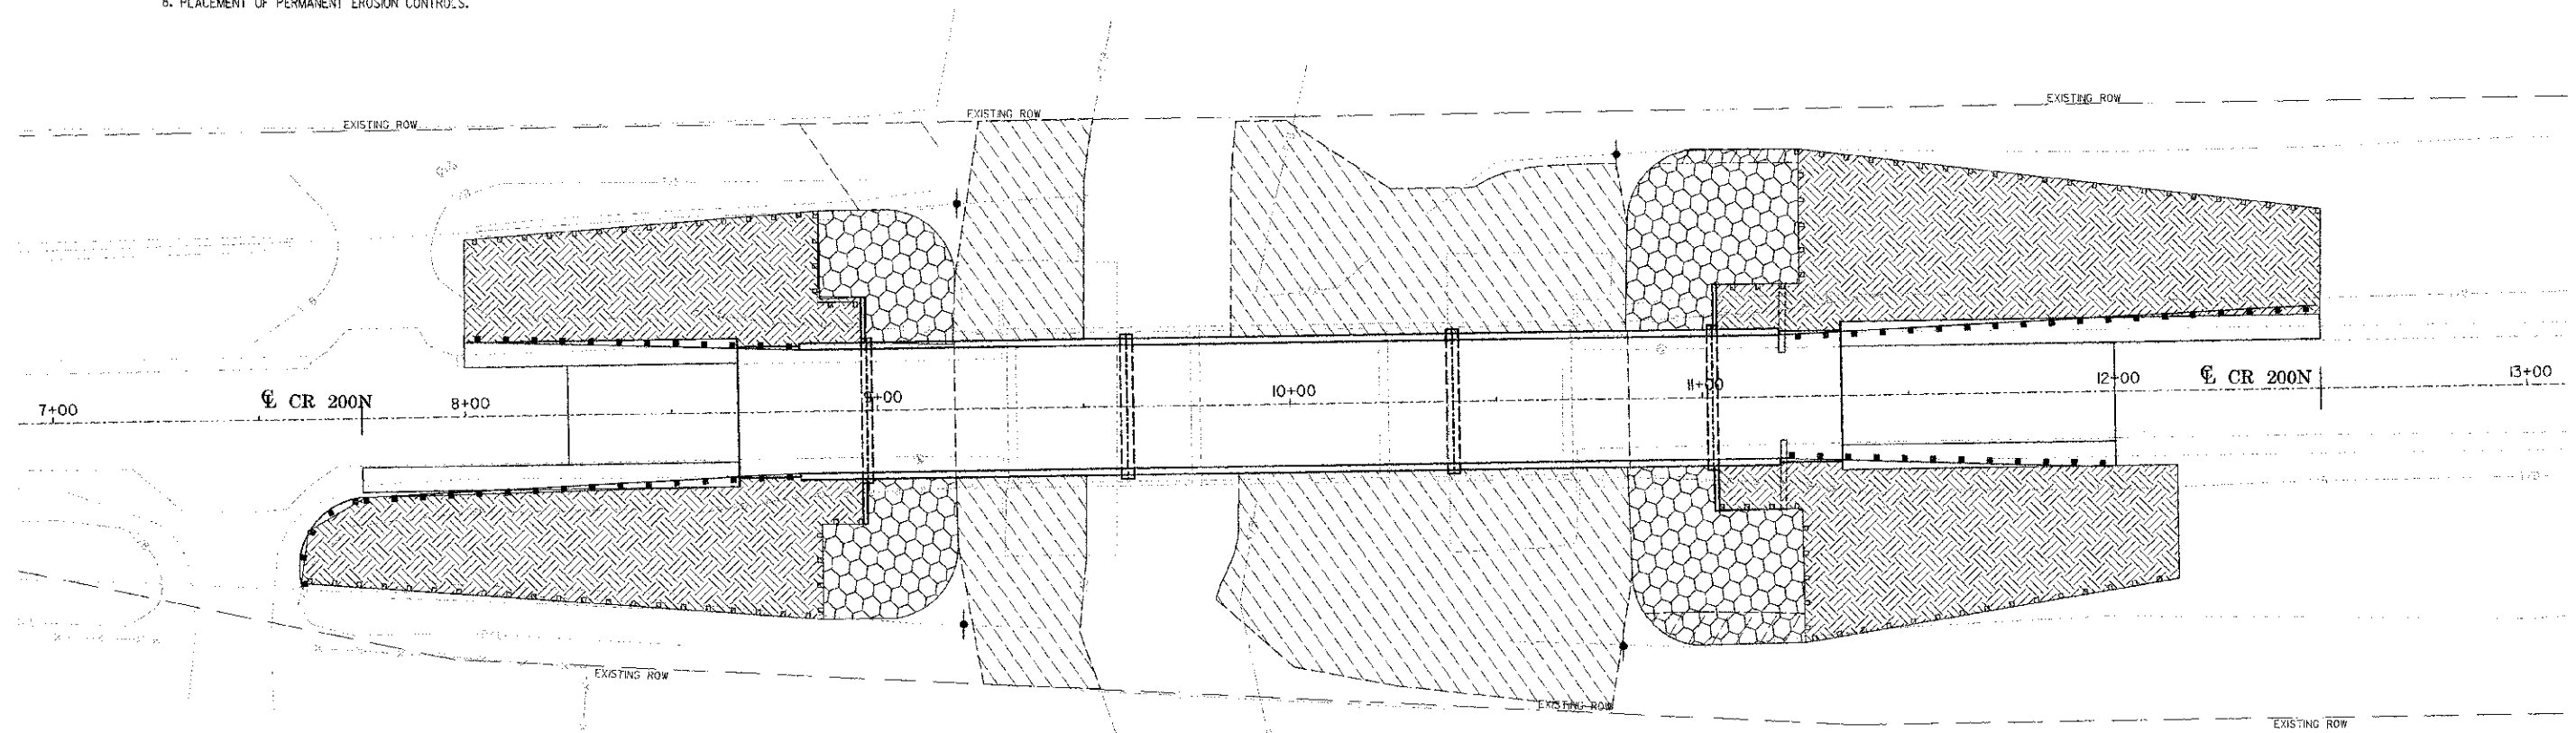


ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
C.H. 16	07-00944-00-BR	CHAMPAIGN	45	8
STA.	TO STA.			
F.H.W.A. REG.	ILLINOIS PROJECT			

INTENDED SEQUENCE

1. PLACEMENT OF PERIMETER EROSION CONTROL BARRIER PRIOR TO COMMENCEMENT OF ANY WORK. SEE STANDARD 2800L.
2. REMOVAL OF THE EXISTING STRUCTURE.
3. CONSTRUCTION OF THE NEW SUB STRUCTURE.
4. CONSTRUCTION OF THE NEW SUPERSTRUCTURE.
5. THE PLACEMENT AND MAINTENANCE OF TEMPORARY EROSION CONTROLS.
6. FINAL GRADING AND SHAPING INCLUDING PLACEMENT OF AGGREGATE BASE COURSE & BITUMINOUS SURFACE.
7. REMOVAL & PROPER CLEAN UP OF TEMPORARY EROSION CONTROLS.
8. PLACEMENT OF PERMANENT EROSION CONTROLS.



PERMANENT EROSION CONTROL

- GROUTED RIPRAP
- SEEDING, CLASS 2
- SEEDING, CLASS 4B

TEMPORARY EROSION CONTROL

- PERIMETER EROSION BARRIER
- TEMPORARY DITCH CHECK
- INLET AND PIPE PROTECTION

28000400 PERIMETER EROSION BARRIER					
STA	OFFSET	TO	STA	OFFSET	LENGTH
8+00	43' LT		8+82	50' LT	83 FT
7+59	37' RT		8+82	50' RT	124 FT
8+82	50' LT		8+82	23' LT	27 FT
8+82	50' RT		8+82	23' RT	27 FT
8+82	23' LT		8+92	23' LT	10 FT
8+82	23' RT		8+92	23' RT	10 FT
11+04	26' LT		11+24	26' LT	20 FT
11+04	26' RT		11+24	26' RT	20 FT
11+24	26' LT		11+24	60' LT	34 FT
11+24	26' RT		11+24	60' RT	34 FT
11+24	60' LT		12+50	45' LT	127 FT
11+24	60' RT		12+50	45' RT	92 FT
TOTAL					608 FT

28000300 TEMPORARY DITCH CHECKS		
STA	OFFSET	QUANTITY
9+20	50' LT	8 FOOT
9+20	53' RT	8 FOOT
10+80	60' LT	8 FOOT
10+80	60' RT	8 FOOT
TOTAL		32 FOOT

TEMPORARY EROSION CONTROL

THE FOLLOWING QUANTITIES ARE ESTIMATES ONLY. ACTUAL QUANTITIES FOR EROSION CONTROL WILL BE DETERMINED BY THE ENGINEER IN THE FIELD, AND THERE WILL BE NO CHANGE IN PRICE DUE TO A CHANGE IN PLAN QUANTITY.

TEMPORARY EROSION CONTROL BILL OF MATERIALS		
ITEM	UNIT	TOTALS
TEMPORARY EROSION CONTROL SEEDING	POUND	350
PERIMETER EROSION BARRIER	FOOT	608
TEMPORARY DITCH CHECKS	FOOT	32

EROSION CONTROL PLAN
SECTION: 07-00944-00-BR
CHAMPAIGN COUNTY
CR STATION 10+00