

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D-3 REFLECTOR REPL 19-06	VARIOUS	3	1
		ILLINOIS		CONTRACT NO. 46501

D-3

INDEX OF SHEETS

1	COVER SHEET
2	GENERAL NOTES
3	SUMMARY OF QUANTITIES
4	SCHEDULES
5	DETAILS



PROPOSED HIGHWAY PLANS

VARIOUS ROUTE
SECTION D-3 REFLECTOR REPL 19-06
RAISED REFLECTIVE PAVEMENT MARKER
REMOVAL AND REPLACEMENT
FOR LIVINGSTON, AND IROQUOIS COUNTIES

M-60-043-18

LIST OF ILLINOIS DOT HIGHWAY STANDARDS

701301-04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701311-03	LANE CLOSURE, 2L, 2W, MOVING OPERATIONS - DAY ONLY
701426-09	LANE CLOSURE, MULTILANE INTERMITTENT OR MOVING OPERATION, FOR SPEEDS ≥ 45 MPH
701427-05	LANE CLOSURE, MULTILANE INTERMITTENT OR MOVING OPERATION, FOR SPEEDS ≤ 40 MPH
701901-07	TRAFFIC CONTROL DEVICES
781001-04	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS

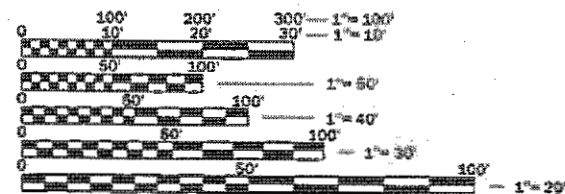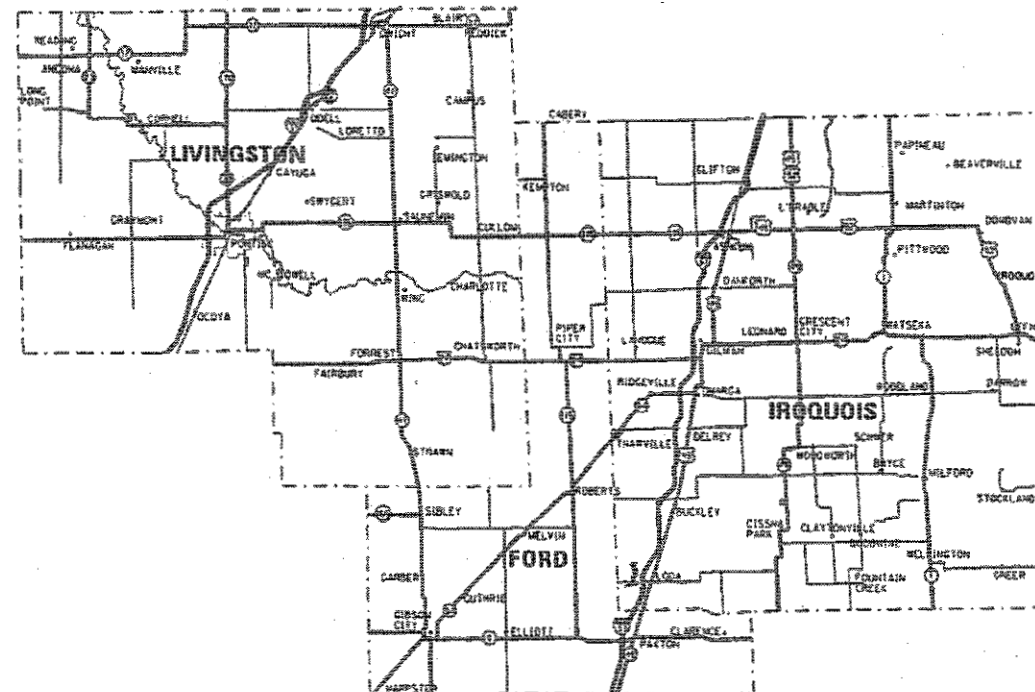

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: JOE KANNEL, P.E.
UNIT CHIEF: MICHELE LINDENMANN, P.E.
DISTRICT 3 NO. (815) 434-6131
CONTRACT NO. 46501

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 3-23 2018
Joe Kannel (SIGNED)
REGIONAL ENGINEER

May 11 2018
Joe Kannel (SIGNED)
ENGINEER OF DESIGN AND ENVIRONMENT

May 11 2018
Joe Kannel (SIGNED)
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

COMMITMENTS

GENERAL NOTES

PLAN DIMENSIONS AND DETAILS RELATIVE TO EXISTING PLANS ARE SUBJECT TO NOMINAL CONSTRUCTION VARIATIONS. THE CONTRACTOR SHALL FIELD VERIFY EXISTING DIMENSIONS AND DETAILS AFFECTING NEW CONSTRUCTION AND MAKE NECESSARY APPROVED ADJUSTMENTS PRIOR TO CONSTRUCTION OR ORDERING OF MATERIALS. SUCH VARIATIONS SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION FOR A CHANGE IN SCOPE OF WORK; HOWEVER, THE CONTRACTOR WILL BE PAID FOR THE QUANTITY ACTUALLY FURNISHED AT THE UNIT PRICE BID FOR THE WORK.

ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER SHOWN IN THE LIST OF STANDARDS OR THE COPY INCLUDED IN THESE PLANS.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE
AS BUILT INFORMATION

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE

SUPERVISING CONSTRUCTION FIELD ENGINEER

PREPARED BY: _____
DISTRICT STUDIES & PLANS ENGINEER

RESIDENT ENGINEER / TECHNICIAN

DATE: _____

START & END DATES
OF CONSTRUCTION: _____

EXAMINED BY: _____
DISTRICT CONSTRUCTION ENGINEER

INSPECTORS: _____

DISTRICT MATERIALS ENGINEER

DISTRICT OPERATIONS ENGINEER

FILE NAME =	USER NAME = corcoranlm	DESIGNED -	REVISED -
pw:\11084EBID\NTEG\Illinois.gov\PW\DOT\Documents\DOT Offices\District 3\Projects\1346501\CADD\Distal\1346501-shi-c		DRAWN -	REVISED -
Default	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
	PLOT DATE = 3/21/2018	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

SCALE: SHEET OF SHEETS STA. TO STA.

FA RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D-3 REFLECTOR REPL 19-06	VARIOUS	5	2
CONTRACT NO. 46501				
ILLINOIS FED. AID PROJECT				

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE		
				RAISED REFLECTIVE PAVEMENT MARKERS 100% STATE		
				FORD 0021 RURAL	LIVINGSTON 0021 RURAL	IROQUOIS 0021 RURAL
67100100	MOBILIZATION	L SUM	1	0.33	0.33	0.34
78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	3490	1453	100	1937
78100300	REPLACEMENT REFLECTOR	EACH	6885	3934	410	2541
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	990	415	50	525

4

MODEL: Default
FILE NAME: E:\110845ED\INTEG\11084551\11084551\DOT Documents\DOT Office\District 3\Projects\0346501\CD\0346501-Sub-cover.dgn

USER NAME = corcoranm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
PLOT SCALE = 100.0000' / in.	DRAWN -	REVISED -					VAR	D-3 REFLECTOR REPL 19-06	VARIOUS	5	3	
PLOT DATE = 3/21/2018	CHECKED -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO	STA.	CONTRACT NO. 46501	
	DATE -	REVISED -		ILLINOIS FED. AID PROJECT								

RAISED REFLECTIVE PAVEMENT MARKER SCHEDULE											
PRIORITY NO.	ROUTE	COUNTY	LOCATION	DESCRIPTION OF REFLECTORS				TOTAL REFLECTORS	REPLACEMENT REFLECTOR	RAISED REFL PVMT MARK	RAISED REFL PVMT MARK REM
				CRYSTAL	AMBER	CRYSTAL/RED	AMBER/RED				
1	57	IROQUOIS	MP 281.2 TO MP 285.5	1158				1158	658	500	100
			RAMPS AT EXIST 283			152	60	212	92	120	70
2	24	IROQUOIS	US 45 NO JCT TO IL 1 WATSEKA	6	836			842	592	250	80
3	45	IROQUOIS	IL 54 TO NCL LODA		925			925	325	600	125
4	45	FORD	PAXTON (DAWN ST) TO CHAMPAIGN CO LINE		230			230	80	150	70
5	17	LIVINGSTON	IL 47 TO N3500 RD (WEST OF REDDICK)		510			510	410	100	50
6	54	FORD/IROQUOIS	McLEAN CO LINE TO IL 47	25	2395			2420	2070	350	75
7	9	FORD	PAXTON, I-57 (BALTIMORE ST) TO ECL	26	228			254	204	50	20
8	9	FORD	McLEAN CO LINE TO IL 47	10	265			275	155	120	50
9	9	FORD	PAXTON ECL TO VERMILION CO LINE		510			510	360	150	75
10	115	FORD	KANKAKEE CO LINE TO IL 9	4	2500			2504	1754	750	150
11	49	IROQUOIS	US 45/52 TO US 24		535			535	185	350	125
12 *	54	FORD	IL 9 TO IL 115								
13 *	116	LIVINGSTON	PONTIAC, IL 23 TO PEARL ST								
14 *	70	LIVINGSTON	IL 17 TO IL 23								
TOTALS									6885	3490	990

* ALT ROUTES IF NECESSARY

MODEL: Default
 FILE: \\nas102.psu.edu\B&E\BID\NTEC\Illinois\pov\PW\DOT\Documents\DOT Office\DI\refct 3\Project\0346501\CAD\DATA\0346501-1-shc-cover.cgm

USER NAME = corcoranlm	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -
PLOT DATE = 3/23/2018	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D-3 REFLECTOR REPL 19-06	VARIOUS	5	4
			CONTRACT NO. 46501	
		ILLINOIS	FED. AID PROJECT	

