F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94	*	COOK	565	243
STA.		TO STA.		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		

62301 * (2021-922 PT2 ETC 2324.6-1P) R-10

SIGN DETAIL



SIGN NUMBER	1S016I094L057.3 LT
WIDTH x HEIGHT	10'-6" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	9"
MOUNTING	OVERHEAD
BACKGROUND	TYPE: REFLECTIVE
	COLOR: GREEN
LEGEND/BORDER	TYPE: REFLECTIVE
	COLOR: WHITE

SYMBOL	X	Y	WID	HT

DIMENSIONS ARE IN INCHES.TENTHS LETTER LOCATIONS ARE PANEL EDGE TO LOWER LEFT CORNER

LETTER POSITIONS (X)																LENGTH	SERIES, SIZE
E	X	I	T	5	6	A										98.7	EM12,EM15
15.1	26.4	39.3	44.1	67.9	83	98.8											
4	3	r	d		S	t										95.6	EM16/12
14.9	32.9	49.8	60	70.2	86.2	102.4											
I	M	I	L	E												59.1	EM15,EM12
33.4	52.9	67	72.4	83.7													

SIGN DETAIL



SIGN NUMBER	1S016I094L057.3 RT
WIDTH x HEIGHT	10'-6" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	9"
MOUNTING	OVERHEAD
BACKGROUND	TYPE: REFLECTIVE
	COLOR: GREEN
LEGEND/BORDER	TYPE: REFLECTIVE
	COLOR: WHITE

SYMBOL	X	Y	WID	HT

DIMENSIONS ARE IN INCHES.TENTHS LETTER LOCATIONS ARE PANEL EDGE TO LOWER LEFT CORNER

LETTER POSITIONS (X)																LENGTH	SERIES, SIZE
E	X	I	T	S	6	B										95.7	EM12,EM15
15.1	26.4	39.3	44.1	67.9	83	98.8											
4	7	t	h		S	t										96.3	EM16/12
14.9	30.7	47.6	60.7	70.9	86.9	103.1											
1/4	M	I	L	E												76.6	EM15,EM12
24.7	61.7	75.8	81.2	92.5													

TYPE I-A 8" PIPE TRUSS SUPPORT FRAME

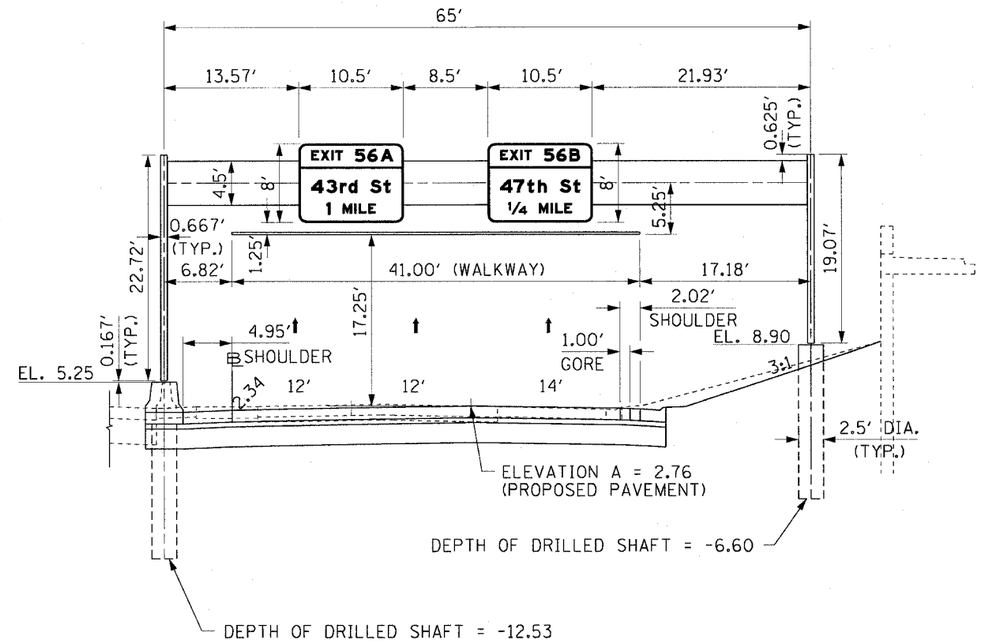

1S016I094L057.3
MOUNTING DETAIL
PROPOSED OVERHEAD SIGN STRUCTURE
STA 4498+00.00 N.B. LOCAL I-90/94
LOOKING NORTH

NOTES:

1. PROPOSED PAVEMENT FOR LOCAL LANES IS SHOWN FOR INFORMATION ONLY.
2. REFER TO ELECTRICAL INFRASTRUCTURE PLANS FOR ORIENTATION AND LOCATION OF THE CONDUIT EMBEDDED IN THE OVERHEAD SIGN FOUNDATIONS.

SGN-1

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
F.A.I. 90/94 (DAN RYAN EXPRESSWAY)
GARFIELD BLVD TO 31ST STREET (NB LOCAL LANES)

SIGN PANEL AND PLACEMENT DETAILS
PROPOSED OVERHEAD SIGN STRUCTURE
STA. 4498+00.00

SCALE: NONE DRAWN BY: JSS
DATE: June 9, 2006 CHECKED BY: RDP

CTE | AECOM

P:\P4046B\CIVIL\IB Cntrs 18 & 19\Sh\Cntr 19\Signing\SS18\0021A.sht
6/7/2006 11:21:13 AM