
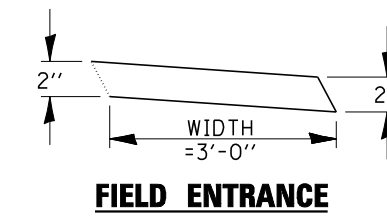


SIDEROAD, PRIVATE AND COMMERCIAL ENTRANCE, AND MAIL BOX TURN-OUTS QUANTITIES

(TO BE PULLED WITH MAINLINE)

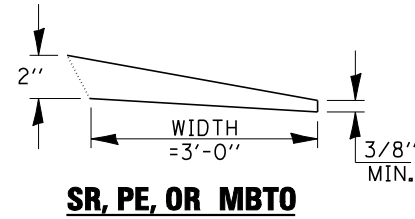

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
500	*	VERMILION	18	9

• (33,116 SPURIRS-1
CONTRACT NO. 70556

O/S	STA	TYPE	AVE LENGTH (FT)	ORIG WIDTH	PROP. WIDTH	AREA (SQFT)	AREA (SQYD)	MIX (TON)	
LT	68+36.00	FE	38	3	3	114.00	12.67	0.12	
RT	77+40.00	FE	34	3	3	102.00	11.33	0.11	
RT	77+97.00	PE	29.5	10	3	351.05	39.01	0.22	
RT	79+62.00	PE	30	10	3	357.00	39.67	0.22	
LT	79+69.00	MBTO - PE	80	0	3	240.00	26.67	0.15	
RT	80+24.00	PE	37.5	10	3	446.25	49.58	0.27	
LT	88+65.00	MBTO	45	7	3	346.50	38.50	0.21	
RT	88+87.00	PE	31.5	10	3	374.85	41.65	0.23	
LT	90+72.00	MBTO	45	7	3	346.50	38.50	0.21	
RT	90+78.00	PE	30.5	10	3	362.95	40.33	0.22	
RT	93+49.00	PE	73		3	219.00	24.33	0.13	
LT	92+50.00	PE - MBTO	70		3	210.00	23.33	0.13	
LT	97+57.00	MBTO	49	7	3	377.30	41.92	0.23	
RT	97+64.00	PE	45	10	3	535.50	59.50	0.33	
LT	100+44.00	PE	30	10	3	357.00	39.67	0.22	
LT	101+54.00	PE - MBTO	64		3	192.00	21.33	0.12	
LT	102+88.00	PE	31.5	10	3	374.85	41.65	0.23	
LT	106+13.00	TR 169	78		3	234.00	26.00	0.14	
URBAN TOTAL								3.50	
RT	106+13.00	TR169	78		3	234.00	26.00	0.14	
LT	116+84.00	PE MBTO	66		3	198.00	22.00	0.12	
RT	117+94.00	FE	45.5	3	3	136.50	15.17	0.14	
RT	122+16.00	FE	41	3	3	123.00	13.67	0.13	
LT	123+49.00	PE	30	10	3	357.00	39.67	0.22	
LT	125+20.00	PE - MBTO	66		3	198.00	22.00	0.12	
LT	125+85.00	PE	32	10	3	380.80	42.31	0.23	
LT	128+63.00	PE	41.5	10	3	493.85	54.87	0.30	
RT	133+00.00	FE	42	3	3	126.00	14.00	0.13	
RT	136+35.00	PE	29.5	10	3	351.05	39.01	0.22	
LT	138+85.00	PE	29	10	3	345.10	38.34	0.21	
LT	139+35.00	PE	31	10	3	368.90	40.99	0.23	
RT	145+03.00	FE	42	3	3	126.00	14.00	0.13	
LT	151+34.00	PE -MBTO	72		3	216.00	24.00	0.13	
RT	153+66.00	FE	42	3	3	126.00	14.00	0.13	
LT	162+77.00	TR 155A	94		3	282.00	31.33	0.17	
RT	162+77.00	TR 155A	83		3	249.00	27.67	0.15	
						TOTALS	9851.95	1094.66	6.43

• DENOTES EXISTING PCC

O/S	STA	TYPE	AVE LENGTH (FT)	ORIG WIDTH	PROP. WIDTH	AREA (SQFT)	AREA (SQYD)	MIX (TON)	
RT	175+77.00	PE	51	10	3	606.90	67.43	0.37	
LT	176+14.00	PE - MBTO	55		3	165.00	18.33	0.10	
LT	189+26.00	FE	44	3	3	132.00	14.67	0.14	
RT	189+34.00	TR 147A	63		3	189.00	21.00	0.12	
LT	191+92.00	PE - MBTO	83		3	249.00	27.67	0.15	
LT	193+21.00	PE	36.5	10	3	434.35	48.26	0.27	
LT	193+96.00	PE - MBTO	100		3	300.00	33.33	0.18	
LT	195+50.00	PE - MBTO - PE	121		3	363.00	40.33	0.22	
LT	196+47.00	FE	35.5	3	3	106.50	11.83	0.11	
RT	202+56.00	FE	45.5	3	3	136.50	15.17	0.14	
LT	202+72.00	FE	44.5	3	3	133.50	14.83	0.14	
LT	216+00.00	TR 147	115		3	345.00	38.33	0.21	
RT	216+00.00	TR 147	115		3	345.00	38.33	0.21	
LT	242+49.00	FE	52.5	3	3	157.50	17.50	0.16	
RT	242+49.00	FE	52	3	3	156.00	17.33	0.16	
LT	256+50.00	CE	41	10	3	487.90	54.21	0.30	
LT	259+27.00	CE	42.5	7	3	327.25	36.36	0.20	
RT	261+55.00	FE	42	3	3	126.00	14.00	0.13	
LT	263+57.00	CE	48	7	3	369.60	41.07	0.23	
LT	264+24.00	CE	48	7	3	369.60	41.07	0.23	
LT	265+10.00	CE	46	7	3	354.20	39.36	0.22	
LT	265+90.00	CE	51	7	3	392.70	43.63	0.24	
LT	266+86.00	CE	53	10	3	630.70	70.08	0.39	
LT	267+96.00	CE	60	10	3	714.00	79.33	0.44	
LT	268+67.00	CE	50	10	3	595.00	66.11	0.37	
LT	100+00.00	BISMARCK RD.	130		3	390.00	43.33	0.24	
RT	10+00.00	BISMARCK RD.	95		3	285.00	31.67	0.18	
LT	100+59.00	GUTTER TRANS.	15		3	45.00	5.00	0.03	
LT	100+98.00	CE	51.5	10	3	612.85	68.09	0.38	
LT	101+62.00	CE	45.5	10	3	541.45	60.16	0.33	
RT	166+00.00	FE	43	3	3	129.00	14.33	0.13	
LT	166+14.00	TR 392	67		3	201.00	22.33	0.12	
RT	170+80.00	FE	42	3	3	126.00	14.00	0.13	
LT	171+35.00	MBTO	55	7	3	423.50	47.06	0.26	
LT	172+37.00	PE	33.5	10	3	398.65	44.29	0.25	
						TOTALS	9,562.40	1,062.49	7.49

• DENOTES EXISTING PCC

GRAND TOTAL	URBAN	RURAL	TOTAL	AREA (SQFT)	AREA (SQYD)	MIX (TONS)
				5,540.8	615.6	3.5
				15,649.9	1,738.9	9.5
				21,190.6	2,354.5	13.0