

CONTRACT NO. 76441 COUNTY TOTAL SHEET NO. SECTION 600 34RS-2 MADISON 39 10 TO STA.____ STA. FED. ROAD DIST. NO. _ ILLINOIS FED. AID PROJECT

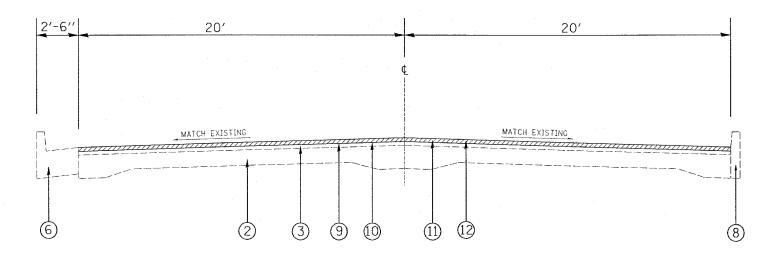

TYPICAL SECTION

STA 88+10.00 TO STA 92+10.00 STA 88+22.00 TO STA 90+88.00 S.B.* STA 88+88.00 TO STA 90+88.00 N.B.*

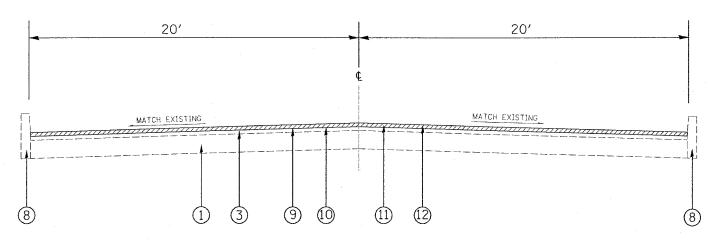

TYPICAL SECTION

STA 92+10.00 TO STA 98+86.00

LEGEND

- 1) EXISTING PCC PAVEMENT, 7"
- EXISTING BITUMINOUS BASE COURSE, 8'-6"
- (3) EXISTING BITUMINOUS RESURFACING, 3.5"
- (4) EXISTING BITUMINOUS RESURFACING, 4.5"
- (5) EXISTING BITUMINOUS SHOULDERS, 8"
- 6 EXISTING CONCRETE CURB AND GUTTER TY. 8-6.24 7 EXISTING TYPE B GUTTER
- (8) EXISTING TYPE B CURB
- 9 PROPOSED AGGREGATE MATERIALS (PRIME COAT) (10) PROPOSED BITUMINOUS MATERIALS (PRIME COAT)
- 1) PROPOSED BITUMINOUS SURFACE REMOVAL. 1.5"
- *PROPOSED BITUMINOUS SURFACE REMOVAL. 3"
- 12 PROPOSED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX D, N90
- (3) PROPOSED BITUMINOUS SHOULDERS SUPERPAVE 1.5"
- 14 PROPOSED STRIP REFLECTIVE CRACK CONTROL

NOTE: THE INTENT OF THE MILLING IS TO REMOVE $1^1\!\!/_2$ " OF THE EXISTING SURFACE AND REPLACE WITH 11/2" OF BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N90

> * IN THE AREA INDICATED, THE INTENT IS TO MILL 3" OF THE EXISTING SURFACE AND REPLACE WITH 11/2" OF BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N90

