


F.A.U. ROUTE	CONTRACT NO.	COUNTY	TOTAL SHEET NO.
5348	87330	DEKALB	140
05-00160-00-WR			31
COMPENSATORY STORAGE BASIN GRADING PLAN			
F.H.W.A. REG.5 ILLINOIS PROJECT			HBF-2295(001)



- NOTES:
1. PROPOSED GRIDLINES ARE AT 100' INTERVALS ESTABLISHED AS FOLLOWS:
 E-W: ANNIE GLIDDEN ROAD STATIONS AND PERPENDICULAR TO CENTERLINE
 N-S: PARALLEL TO ANNIE GLIDDEN ROAD CENTERLINE, BEGINNING AT 105' LT
 2. PROPOSED ELEVATIONS ARE TO FINISHED GRADE AFTER PLACING TOPSOIL, 4".
 3. GRADING ADJACENT TO PROPOSED SIDEWALK/BICYCLE PATH SHALL BE AS SHOWN ON THE CROSS SECTIONS.
 4. FOR PROPOSED STORM SEWER AND RIPRAP, SEE UTILITY PLAN AND PROFILE SHEETS.
 5. A GRASSED, LEVEL SURFACE, 16' WIDE, SHALL BE PROVIDED ALONG SUMMIT TO BASE OF UTILITY POLE. A MAXIMUM 10:1 SLOPE SHALL BE GRADED FROM BACK OF SIDEWALK/BICYCLE PATH TO LEVEL SUMMIT.

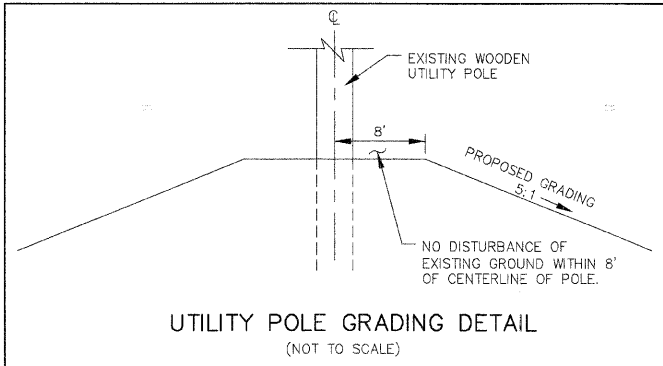