

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
332	(29, 29X) RS-2	GALLATIN/SALINE	15	1

CONTRACT NO. 98942

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS

# PROPOSED HIGHWAY PLANS

FAP ROUTE 332 (US 45)  
SECTION: (29, 29X) RS-2  
PROJECT: NHF-0332 (082)  
GALLATIN & SALINE COUNTIES  
C-99-005-06

### INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	LISTING OF APPLICABLE HIGHWAY STANDARDS GENERAL NOTES, MIXTURE REQUIREMENTS
3 - 4	SUMMARY OF QUANTITIES
5 - 7	TYPICAL SECTIONS
8 - 11	SCHEDULES OF QUANTITIES
12	PAVEMENT MARKING DETAIL
13	BUTT JOINT & TRANSITION DETAILS
14	SIDEROAD & ENTRANCE DETAILS
15	TEMPORARY BITUMINOUS CONCRETE TRANSITIONS DETAILS "ROUGH GROOVED SURFACE" SIGN "UNEVEN PAVEMENT" SIGN  HIGHWAY STANDARDS

### STATION EQUATIONS

STA 477+06.2 @ BK = STA 459A+59.2 @ AH  
STA 477A+00.0 @ BK = STA 477+00.0 @ AH

### TOWNSHIPS


ELDORADO  
RECTOR  
OMAHA

### TRAFFIC DATA

US 45 NORTHBOUND AND SOUTHBOUND LANES  
US 45: 2003 ADT = 8400 WITH 11% TRUCKS

J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123 or www.juliecall.com

CONTRACT NO. 98942

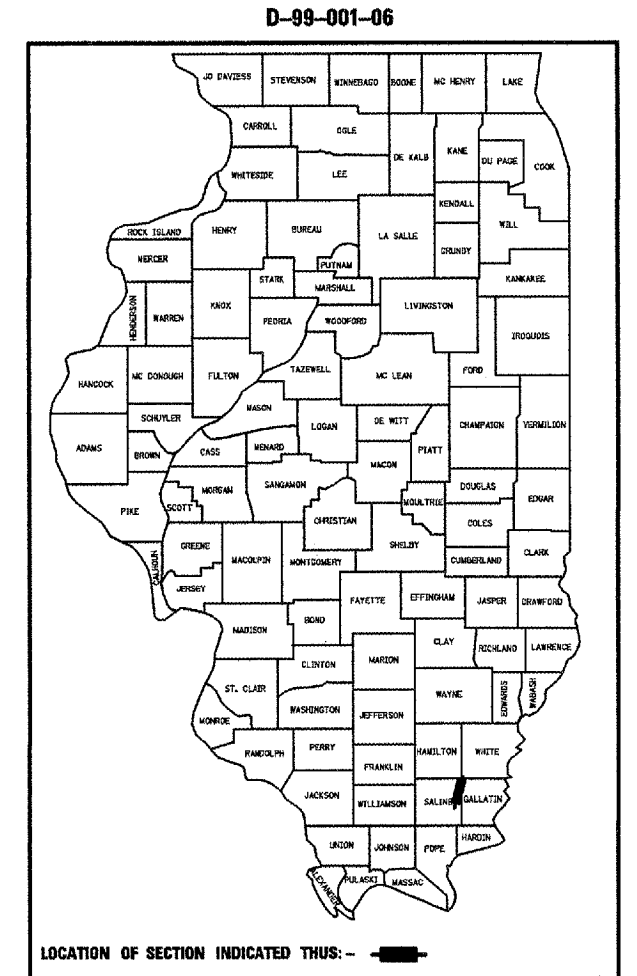

SALINE / GALLATIN  
COUNTY LINE  
STA 763+00

PROJECT ENDS  
STA 826+17.0

BRIDGE OMISSION  
S.N. 083-0001  
STA 720+12 TO  
STA 722+34

S.N. 083-0002  
STA 704+60.8

DOUBLE BOX CULVERT  
S.N. 083-2000  
STA 627+56.5

PAVING OMISSION  
STA 598+38.5 TO  
STA 676+84.0

EQ STA 477A+00.0 BK=  
STA 477+00.0 AH

PROJECT BEGINS  
STA 395+00.0

EQ STA 477+06.2 BK=  
STA 459A+59.2 AH

APPROXIMATE SCALE  
0 1 ML 2 ML

GROSS LENGTH OF PROJECT = 44,864.5 FT = 8.50 MILES  
NET LENGTH OF PROJECT = 36,797 FT = 6.97 MILES

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS

SUBMITTED May 9, 2006  
May C. Lammie  
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

June 30, 2006  
Mike Hene  
ENGINEER OF DESIGN AND ENVIRONMENT

June 30, 2006  
Milton R. Sees, P.E.  
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS