F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
575	(B&14) R-3	WILL	390	253

STA.	TO STA.

FED. ROAD DIST. NO. 1	ILLINOIS FED. AID PROJECT

CONTRACT NO. 60981

1700 (68")

175 (7")   1350 (54")   175 (7")

①

1125 (45")

175 175 125 175 175
(7") (7") (5") (7") (7")

ROAD WORK

AHEAD

EXPECT DELAYS

1" BLACK BORDER

2.1 m MIN. (7')

②

USE APPROPRIATE
MONTH AND DATE
FOR CONTRACT

275 (11")

BEGINS   XXX   XX

1450 (58")
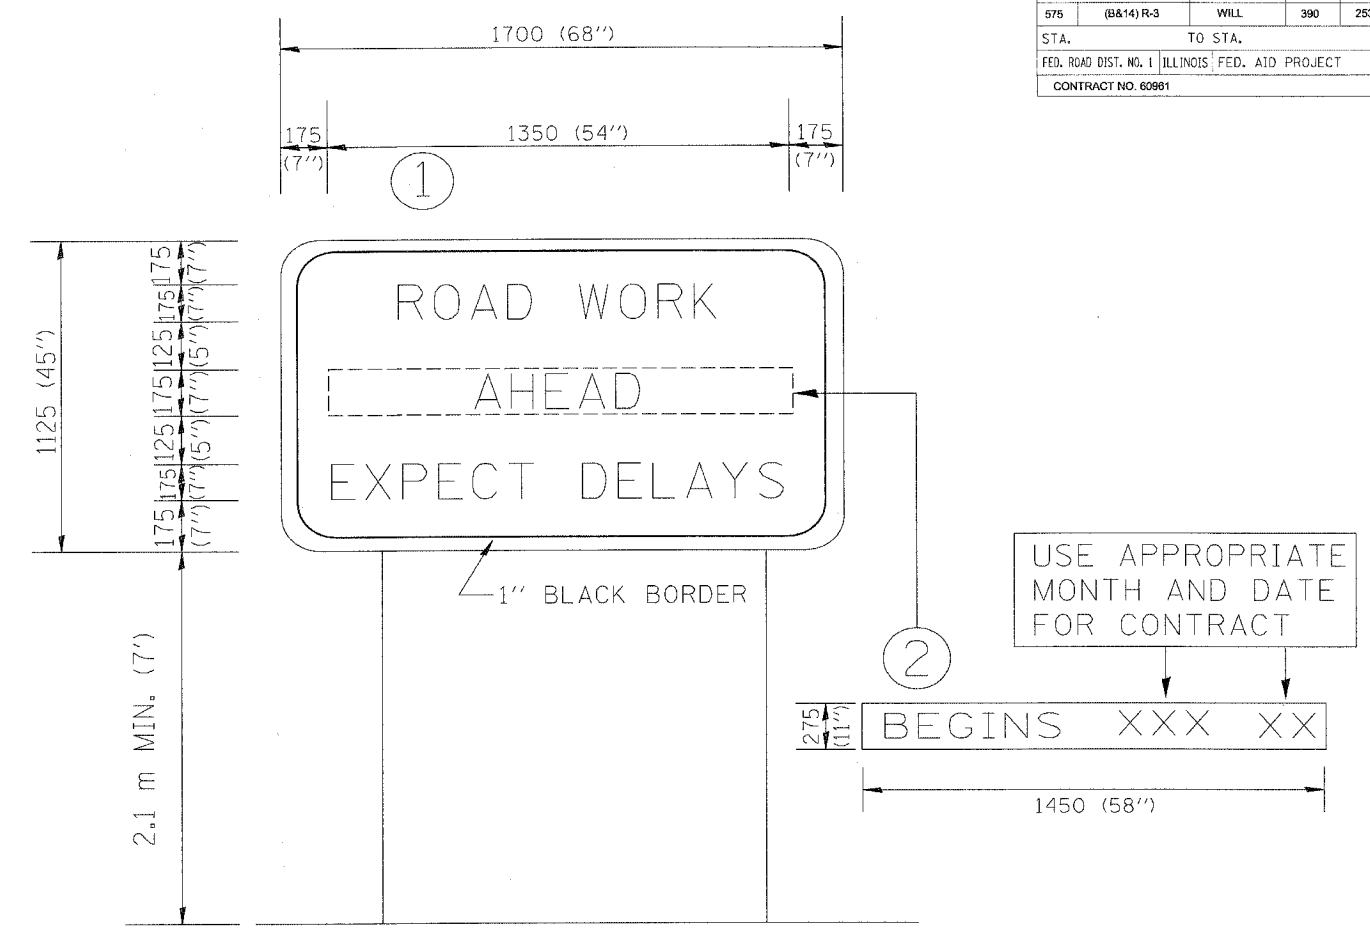
NOTES:

1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN ① WITH INSTALLED PANEL ② ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
4. REMOVE PANEL ② SOON AFTER THE START OF CONSTRUCTION.
5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
6. ONE SIGN ASSEMBLY EQUALS 2.3 SQ. M. (25.70 SQ. FT.)

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES)
UNLESS OTHERWISE SHOWN.

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
R. MIRS	9-15-97	
R. MIRS	2-11-97	TEMPORARY INFORMATION SIGNING
T. RAMMACHER	2-2-99	

SCALE:	DRAWN BY: BUR. OF DESIGN
DATE 10/18/2002	CHECKED BY

TC22
REVISION DATE: 02/02/99