


- CONCRETE REMOVAL
- BITUMINOUS REMOVAL (DECK)
- BRIDGE DECK HYDRO-SCARIFICATION

Minimum Bar Lap

- #4 1'-8"
- #5 2'-2"
- #6 2'-7"
- #7 3'-5"
- #8 4'-6"

Existing reinforcement shall be straightened, cleaned and incorporated into the new concrete

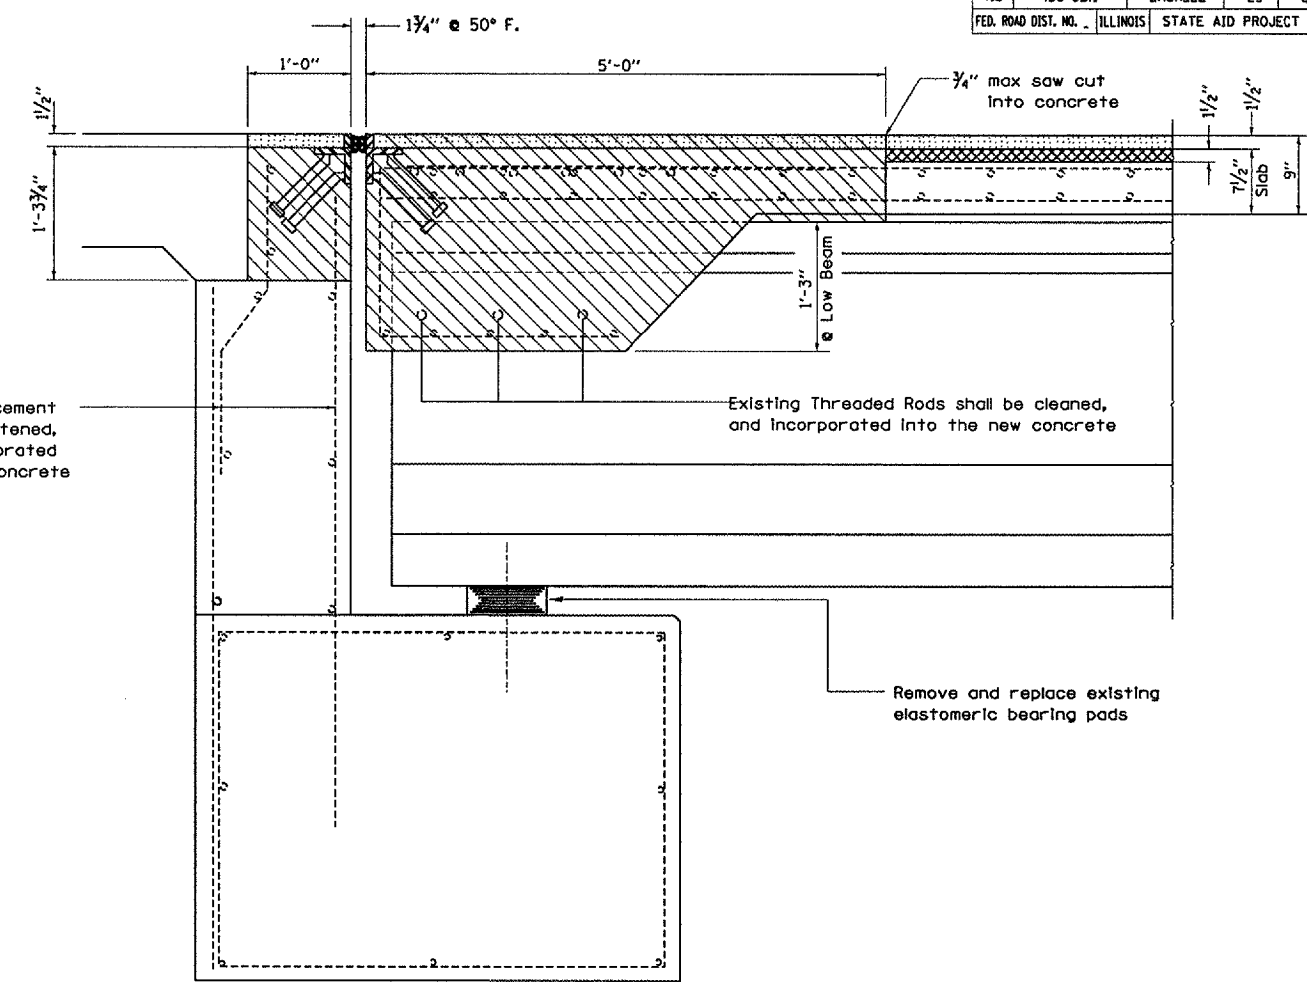

ABUTMENT SECTION  
@ Rt <'s

BILL OF MATERIAL SOUTH ABUTMENT

Item	Unit	Total
CONCRETE REMOVAL	CU. YD.	15.5
JACK AND REPLACE BEARINGS	EACH	6

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**CONCRETE REMOVAL-SOUTH ABUT.**  
**DECK DETAILS**  
 F.A.I. 412 SOUTHBOUND  
 OVER C. & N.W. RAILROAD  
 SECTION (50-5B)I  
 STA. 1216 + 43.45  
 DATE 04/24/2005  
 DRAWN BY RW  
 CHECKED BY

MARCH 24, 2005  
C:\PROJECTS\CMA\106\CM302\DETAILS.DGN