
EXISTING DECK BEAM

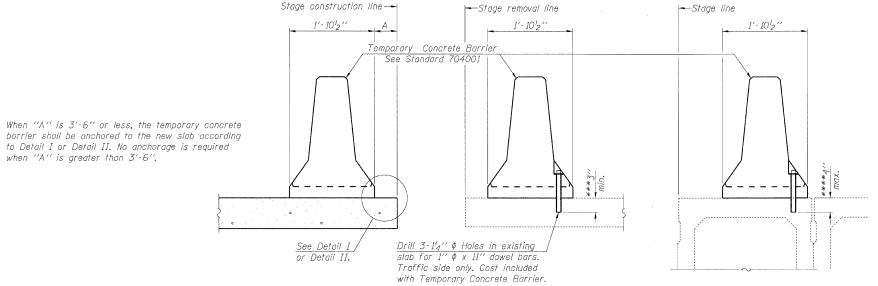

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (I) 1"x7"x10" steel P_L to the top layer of couplers with 2^{-5}_8 " ϕ bolts screwed to coupler at approximate © of each barrier panel.

Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x10" steel № to the concrete slab or concrete wearing surface with 2-58"\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier. The I'' x 7"' x 10"' plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


SECTIONS THRU SLAB OR DECK BEAM


EXISTING SLAB

***Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

****If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

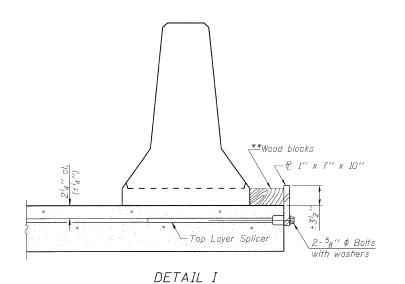

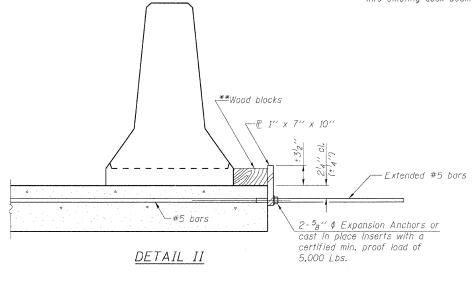



STEEL RETAINER P 1" x 7" x 10"

*Required only with Detail II

**Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

TEMPORARY CONCRETE BARRIER US 52 OVER FORKED CREEK STA. 65+70 S.N. 099-0133

TOTAL SHEET SHEETS NO. SECTION COUNTY SHEET NO.S-3 31 18 852 18B WILLS-13 SHEETS CONTRACT NO. 60D87 FED. ROAD DIST. NO. | ILLINOIS FED. AID PROJECT

DESIGNED B. Sauter CHECKED E. Mroczek

DRAWN R. Danley

CHECKED B. Sauter R-27

5-16-08



Ciorba Group, Inc. CONSULTING ENGINEERS 5507 North Cumberland Avenue, Suite 402 Chicago, Illinois 60656 Tel. 773.775.4009 Fax 773.775.4014 Email chicago@ciorba.com

NEW SLAB