

**PROPOSED ELECTRIC CONSTRUCTION
ALONG BAILEY RD. (DUPAGE COUNTY)
BETWEEN WASHINGTON ST. AND
COACH DR. AT THE DUPAGE RIVER
IN THE CITY OF NAPERVILLE, STATE OF ILLINOIS**

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
1545	00-00115-00-BR	DUPAGE	9	67
STA. 1+31.77		TO STA. 5+50.00		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CONTRACT 83961


SPECIAL NOTES

- ALL UTILITIES MAY NOT BE SHOWN. CALL J.U.L.I.E. AT 1-800-892-0123 FOR FIELD LOCATIONS OF UNDERGROUND UTILITY LINES PRIOR TO ANY DIGGING OR CONSTRUCTION.
- THE BRUSH AND TREES SMALLER THAN 6 INCHES IN DIAMETER LOCATED IN ROAD RIGHT OF WAY AND THAT IS PRESENT ALONG MOST OF THE PROPOSED ROUTE ARE TO BE TRIMMED OR REMOVED BY THE LANDSCAPE CONTRACTOR FOR CLEARANCE TO THE PROPOSED UNDERGROUND OR OVERHEAD ELECTRIC WIRES OR EQUIPMENT AS REQUIRED AND IS UNDER THE DIRECTION OF THE CITY OF NAPERVILLE (ELECTRIC) AND PER PERMIT. ALL TREE WORK IS TO BE PERFORMED BY LANDSCAPE CONTRACTOR PROVIDED BY THE LINE CONTRACTOR.
- THE LOCATIONS OF UNDERGROUND UTILITIES AS SHOWN HEREON ARE BASED ON ABOVE GROUND STRUCTURES, J.U.L.I.E. PAINT MARKS, AND RECORD DRAWINGS. LOCATIONS OF UNDERGROUND UTILITIES/STRUCTURES MAY VARY FROM LOCATIONS SHOWN HEREON. ADDITIONAL BURIED UTILITIES/STRUCTURES MAY BE ENCOUNTERED. NO EXCAVATIONS WERE MADE DURING THE SURVEY OF THIS WORK TO LOCATE BURIED UTILITIES/STRUCTURES. BEFORE EXCAVATIONS ARE BEGUN, THE FOLLOWING OFFICES SHOULD BE CONTACTED FOR VERIFICATION OF UTILITY TYPE AND FOR FIELD LOCATIONS: TELEPHONE, GAS, ELECTRIC, WATER, SEWER AND CABLE T.V. ALL LOCATED OR POSSIBLE UNDER GROUND FACILITIES SHALL BE EXPOSED ON ALL SIDES BY EXCAVATING TO THE KNOWN OR UNKNOWN UNDER GROUND FACILITY PRIOR TO DIGGING FOUNDATIONS, TRENCHES OR HANDHOLES.
- EXISTING ELECTRICAL FACILITIES SHALL BE DE-ENERGIZED PRIOR TO THE CONTRACTOR AND HIS SUBCONTRACTOR'S WORKERS COMMENCING WORK. THE CONTRACTOR IS TO CONTACT THE DEPARTMENT OF PUBLIC UTILITIES, ELECTRICAL DIVISION TO DE-ENERGIZED ALL NEARBY ELECTRICAL CIRCUITS AND FACILITIES. HOWEVER, IF CONDITIONS EXIST THAT REQUIRE THE CIRCUIT TO REMAIN ENERGIZED, THE CONTRACTOR SHALL PROCEED TO WORK WITH CONDUCTORS ENERGIZED, PER OSHA AND NESC REGULATIONS.
THE CONTRACTOR SHALL COORDINATE THE PLANNED WORK SCHEDULE, CONSTRUCTION SEQUENCE, AND ANY OUTAGE REQUEST WITH THE DPU-E ELECTRICAL CONTROL, MR. JOHN FEATER AND THE ENGINEER.
- CONTRACTOR SHALL EXERCISE EXTREME CAUTION WHILE WORKING IN, ON OR NEAR ELECTRICAL FACILITIES. HE AND ALL HIS SUBCONTRACTOR'S WORKERS SHALL FOLLOW APPROPRIATE OSHA LOCK-OUT/TAG-OUT PROCEDURES, CONFINED SPACE ENTRY, CPR AND CLEARANCE REQUIREMENTS FROM ENERGIZED EQUIPMENT.
- CONNECTION TO EXISTING ELECTRICAL FACILITIES SHALL BE ACCOMPLISHED ONLY BY CONTRACTOR'S EMPLOYEES AND HIS SUBCONTRACTOR'S EMPLOYEES THAT ARE TRAINED TO WORK ON HIGH VOLTAGE FACILITIES (34.5kV FACILITIES OR LOWER), IN ACCORDANCE WITH OSHA REGULATIONS, 29 CFR. A MINIMUM OF TWO SUCH QUALIFIED PERSONNEL SHALL BE PRESENT WHILE WORKING ON OR NEAR THESE FACILITIES.
- THE CONTRACTOR SHALL ARRANGE FOR INSPECTION OF HIS AND HIS SUBCONTRACTOR'S WORK, BY DPU-E PERSONAL.
- THE CONTRACTOR SHALL INSTALL ALL WORK (UNLESS OTHERWISE SPECIFIED) AT EACH LOCATION TO THE FINAL ELEVATIONS AND INTENDED PURPOSE. THE CONTRACTOR'S SURVEYOR TO OBTAIN THE ELEVATION AND PROVIDE THIS ELEVATION MARK TO THE CONTRACTOR WITH A FIELD STAKE AND ELEVATION WRITTEN ON IT. IN ADDITION, ELEVATION MARKS FOR HANDHOLES SHALL BE DETERMINED. THIS WORK IS CONSIDERED INCIDENTAL TO THE CONTRACT. THE SURVEYOR SHALL PERFORM ALL LAYOUT WORK, OFFSET STAKES, PROFILE WORK, VOLUMES, CALCULATIONS, FOUNDATION WORK, AS BUILT WORK, SLOPE, GRADE, BENCHMARK WORK, ELEVATION AND DIMENSIONS PER G.P.S.
- ALL WORK SHALL MEET OSHA REGULATIONS OF LATEST ISSUE.
- THE CONTRACTOR SHALL REMOVE ONLY THOSE TREES, BUSHES, FLOWERS, AND SHRUBS SO DESIGNATED ON THE PLANS OR AS DIRECTED BY THE ENGINEER, OR THOSE WHICH DIRECTLY INTERFERE WITH THE SAFETY OR QUALITY OF CONSTRUCTION PRACTICES. THE CONTRACTOR SHALL NOTIFY THE ENGINEER A MINIMUM OF TWO (2) DAYS IN ADVANCE OF REMOVAL OF TREES WHICH AFFECT SAFETY. THE CONTRACTOR SHALL EXERCISE EXTREME CARE WHEN WORKING NEAR EXISTING TREES AND SHRUBS TO AVOID DAMAGING THOSE NOT SCHEDULED FOR REMOVAL AND SHALL REPLACE ANY DAMAGED PLANTS AT HIS OWN EXPENSE. THE CONTRACTOR SHALL PROTECT ALL OTHER TREES, BUSHES AND LANDSCAPING FEATURES. TREES REMOVED OR DAMAGED BY THE CONTRACTOR WHICH HAVE NOT BEEN DESIGNATED FOR REMOVAL, SHALL BE REPLACED BY THE CONTRACTOR AT NO COST TO THE CITY. TREES TO HAVE BRANCHES OR ROOTS PRUNED SHALL BE DONE IN A NEAT AND CLEAN MANNER (i.e., WITH A SAW OR SHEARS) AND NOT TORN OR BROKEN WITH CONSTRUCTION EQUIPMENT.

GENERAL NOTES

- CONTRACTOR SHALL RESTRICT HIS OPERATIONS TO EASEMENTS AND ROAD RIGHT-OF-WAY AS SHOWN ON THE DRAWINGS.
- PRIOR TO THE START OF CONSTRUCTION, THE CONTRACTOR SHALL ARRANGE TO HAVE ALL UNDERGROUND UTILITIES INCLUDING WATER, GAS, ELECTRIC, STORM SEWER, SANITARY SEWER, SPRINGLER SYSTEM, TRAFFIC CONTROL SIGNALS, TELEPHONE AND CABLE TV LOCATED AND SUITABLY MARKED. SHOULD A UTILITY BE IN CONFLICT WITH THE PROPOSED CONSTRUCTION, THE ENGINEER SHALL BE NOTIFIED AT ONCE. IF UTILITIES INTERFERE WITH THE CONSTRUCTION ALIGNMENT, THEY SHALL BE PROTECTED AT NO ADDITIONAL EXPENSE TO THE OWNER AND WITHOUT CLAIM BY THE CONTRACTOR FOR DELAYS DUE TO UTILITY LINES ENCOUNTERED. THE CITY OF NAPERVILLE SHALL BE NOTIFIED 96 HOURS IN ADVANCE OF WATERMAIN, SANITARY, AND ELECTRIC CROSSINGS.
- INFORMATION ON THE PLANS REGARDING UNDERGROUND UTILITIES IS TAKEN FROM THE BEST AVAILABLE RECORDS, BUT IS NOT REPRESENTED AS BEING ENTIRELY CORRECT OR COMPLETE. THE CONTRACTOR SHALL NOTIFY OPERATING AGENCY IN ADVANCE OF CROSSING OVER OR UNDER ANY UTILITIES SHOWN ON THE PLANS. THE CONTRACTOR SHALL NOTIFY OPERATING AGENCY AND ENGINEER IMMEDIATELY UPON DISCOVERY OF ANY UTILITY NOT SHOWN ON THE PLANS. ANY UTILITIES DAMAGED BY THE CONTRACTOR'S OPERATIONS SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.
- MSDS SHEETS ARE REQUIRED ON THE JOB SITE FOR ALL MATERIALS USED.
- THE CONTRACTOR SHALL UNDER NO CIRCUMSTANCES DISTURB OR REMOVE A TREE UNLESS SPECIFICALLY DIRECTED TO DO SO ON THE PLANS OR BY THE ENGINEER. CONTRACTOR SHALL NOTE PROTECTION OF ALL TREES, SHRUBS ETC., ALONG THE LINE OF CONSTRUCTION IS REQUIRED. WRITTEN PERMISSION FROM THE OWNER IS REQUIRED PRIOR TO ANY TREE OR SHRUB REMOVAL.
- THE CONTRACTOR SHALL PROTECT ALL PROPERTY PINS AND SURVEY MONUMENTS AND SHALL RESTORE ANY WHICH ARE DISTURBED BY HIS OPERATIONS AT NO ADDITIONAL COST TO THE CONTRACT.
- ALL FIELD TILE, CULVERTS, GRATES, DRAIN PIPE, ENCOUNTERED DURING CONSTRUCTION OPERATIONS AND DAMAGED SHALL BE REPAIRED WITH NEW MATERIALS PER THE SPECIFICATIONS. A RECORD OF THE LOCATION OF ALL FIELD TILE, CULVERTS OR DRAIN PIPE ENCOUNTERED SHALL BE KEPT BY THE CONTRACTOR AND TURNED OVER TO THE ENGINEER UPON COMPLETION OF THE PROJECT. ALL FIELD REPAIRS SHALL BE AT CONTRACTOR'S EXPENSE.
- ANY PAVEMENT OR PAVEMENT STRIPING DAMAGED OR REMOVED DURING CONSTRUCTION OPERATIONS, OTHER THAN THE AREAS SHOWN ON DRAWING 58199 SHEETS 1 THRU 23, SHALL BE REPLACED IN KIND BY THE CONTRACTOR AT NO COST TO THE CITY.
- ALL EXISTING UTILITY FACILITIES SHALL BE KEPT IN SERVICE DURING CONSTRUCTION EXCEPT WHERE PERMISSION IS GRANTED OTHERWISE BY THE OWNER. ALL VALVE BOXES AND VALVE VAULTS, ELECTRIC MANHOLES, SWITCH GEARS OR TRANSFORMERS SHALL REMAIN ACCESSIBLE TO THE RESPECTIVE UTILITY COMPANY.
- THE CONTRACTOR SHALL TAKE THE NECESSARY PRECAUTIONS TO PROTECT EXISTING FENCE, POSTS, AND GATES DURING CONSTRUCTION. ALL WORK AND MATERIAL NECESSARY TO REPLACE EXISTING FENCE, POSTS, AND GATES DAMAGED BECAUSE OF NONCOMPLIANCE WILL BE AT CONTRACTOR'S OWN EXPENSE, AND NO EXTRA COMPENSATION WILL BE ALLOWED. ALL REPLACEMENT MATERIALS ARE TO BE NEW.
- ALL EXISTING TRAFFIC SIGNS, ELECTRIC UNDERGROUND CABLES, DUCTS, FENCES, GUARDRAILS, STREET LIGHTS, STREET SIGNS, ETC., WHICH INTERFERE WITH CONSTRUCTION OPERATIONS AND NOT NOTED FOR REMOVAL OR DISPOSAL SHALL BE MAINTAINED BY THE CONTRACTOR OR TEMPORARILY RELOCATED. THIS IS CONSIDERED INCIDENTAL TO THE CONTRACT AND NO ADDITIONAL COMPENSATION SHALL BE ALLOWED. DAMAGE TO THESE ITEMS SHALL BE REPAIRED BY THE CONTRACTOR AT HIS OWN EXPENSE. IN ADDITION, ALL MAILBOXES THAT INTERFERE WITH CONSTRUCTION SHALL BE SIMILARLY RELOCATED AT NO ADDITIONAL COST. CONTRACTOR SHALL PROVIDE TEMPORARY TRAFFIC REGULATORY AND SAFETY SIGNAGE THAT IS DISTURBED BY CONSTRUCTION ACTIVITIES. SUCH COST SHALL BE CONSIDERED INCIDENTAL TO THE COST OF TRAFFIC CONTROL.
- THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL BUSINESS, THE CONSTRUCTION SITE, RESIDENCES, AGRICULTURE AREAS, AND ALL OTHER SITES NECESSARY FOR THE MAINTENANCE OF COMMERCE AND SAFETY AT ALL TIMES. THE CONTRACTOR MAY PLACE TEMPORARY PLATES OR OTHER SUCH DEVICES IN A SAFE AND ACCESSIBLE MANNER TO TEMPORARILY MAINTAIN ACCESS. IN NO CASE MAY MORE THAN ONE POINT OF ACCESS TO ANY RESIDENCE, BUSINESS OR SITE BE UNDER CONSTRUCTION SIMULTANEOUSLY. SHOULD A PROPERTY HAVE ONLY ONE POINT OF ACCESS, THE CONTRACTOR SHALL STAGE HIS WORK SO AS TO ONLY OBSTRUCT ONE HALF OF THIS ENTRANCE AT ANY TIME AND SHALL MAINTAIN ACCESS TO HIS PROPERTY AT ALL TIME. COSTS FOR MAINTAINING ACCESS SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT (SEE NOTE 28).
- CONTRACTOR SHALL PLACE AND MAINTAIN TEMPORARY 2" TO 6" HMA PATCHES ACROSS ALL PAVEMENT REPAIR AREAS PRIOR TO THE INSTALLATION OF THE FINAL PAVEMENT REPAIRS. COSTS SHALL BE INCIDENTAL TO THE ASSOCIATED PAY ITEMS. PLATES MAY BE PLACED IN LIEU OF HMA PATCHES AT THE DISCRETION OF THE FIELD ENGINEER. PLATES ARE TO BE RAMPED AND PINNED IN PLACE TO PREVENT MOVEMENT AND CAPABLE OF SUPPORTING HS-20 LOADING. COUNTER SINKING OF PLATES IS REQUIRED.
- THE CONTRACTOR SHALL REMOVE AND REPLACE ALL SIGNS OF ALL TYPES, SIZES, AND OWNERSHIP NECESSARY TO COMPLETE INDICATED WORK. COST OF THIS WORK SHALL BE INCIDENTAL TO THE WORK AND CONTRACT.
- THE CONTRACTOR SHALL BRACE ALL STREET LIGHT POLES, DPU-E POLES, CABLE TV OR COMED POLES WITHIN THE VICINITY OF THE INDICATED WORK. COST OF THIS WORK SHALL BE INCIDENTAL TO THE WORK AND CONTRACT. ANY DELAY DUE TO OBTAINING PERMISSION OR A PERMIT FROM THE OWNER OF THE FACILITY TO SUPPORT OR RELOCATE OF ANY EXISTING FACILITY IS AT THE CONTRACTOR'S EXPENSE.
- THE CONTRACTOR SHALL CONTACT THE CITY OF NAPERVILLE'S TRANSPORTATION ENGINEERING AND DEVELOPMENT BUSINESS GROUP 48 HOURS PRIOR TO PERFORMING WORK IN OR AROUND THE WORK AREA WHERE DETECTOR LOOPS OR TRAFFIC SIGNALS HAVE THE POSSIBILITY OF BEING ENCOUNTERED AND/OR DAMAGED. THE CONTRACTOR SHALL CONTACT THE DUPAGE COUNTY DEPARTMENT OF TRANSPORTATION WITH THE SAME INFORMATION.

CONTINUED ON PAGE 2

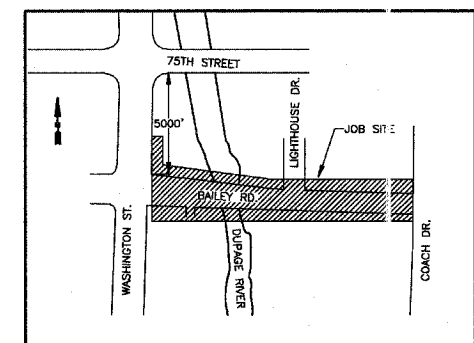

LOCATION MAP
N.T.S.

CITY OF NAPERVILLE/DEPARTMENT OF PUBLIC UTILITIES -- ELECTRIC					
CALL J.U.L.I.E. 48 HRS. PRIOR TO CONSTRUCTION					
PROJECT TITLE	MAP NO.	DATE	SCALE	DATE	NO. OF SHEETS
BAILEY RD. BRIDGE DUCTBANK INSTALLATION	2014/1323	08-15-07	58199	08/15/07	1 OF 23
PROJECT DESCRIPTION	ENGINEER	DATE	SCALE	DATE	NO. OF SHEETS
COORDINATED WITH BRIDGE IMPROVEMENT	JK	08/15/07	58199	08/15/07	1 OF 23
DATE	ENGINEER	DATE	SCALE	DATE	NO. OF SHEETS
08-15-07	JK	08/15/07	58199	08/15/07	1 OF 23
DATE	ENGINEER	DATE	SCALE	DATE	NO. OF SHEETS
08-15-07	JK	08/15/07	58199	08/15/07	1 OF 23