


INTERCONNECT SCHEDULE OF QUANTITIES

QUANTITY	UNIT	ITEM
317	FOOT	CONDUIT IN TRENCH, 2" DIA., GALVANIZED STEEL
317	FOOT	TRENCH AND BACKFILL FOR ELECTRICAL WORK
1	EACH	MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION
1	EACH	TRANSCIEVER - FIBER OPTIC
1	EACH	DRILL EXISTING HANDHOLE
2	EACH	REMOVE EXISTING HANDHOLE
1328	FOOT	FIBER OPTIC CABLE IN CONDUIT, NO. 62.5/125 MM12F & SM12F
1	EACH	RE-OPTIMIZE TRAFFIC SIGNAL SYSTEM LEVEL 2
1304	FOOT	ELECTRIC CABLE IN CONDUIT, TRACER NO. 14 IC

PLAN	SURVEYED	DATE
	PLOTTED	
	CHECKED	
	BY	
	NOTE BOOK	
	NO.	
	FILE NAME	

PROFILE	SURVEYED	DATE
	PLOTTED	
	CHECKED	
	BY	
	NOTE BOOK	
	NO.	
	STRUCTURE	
	NOTATIONS	

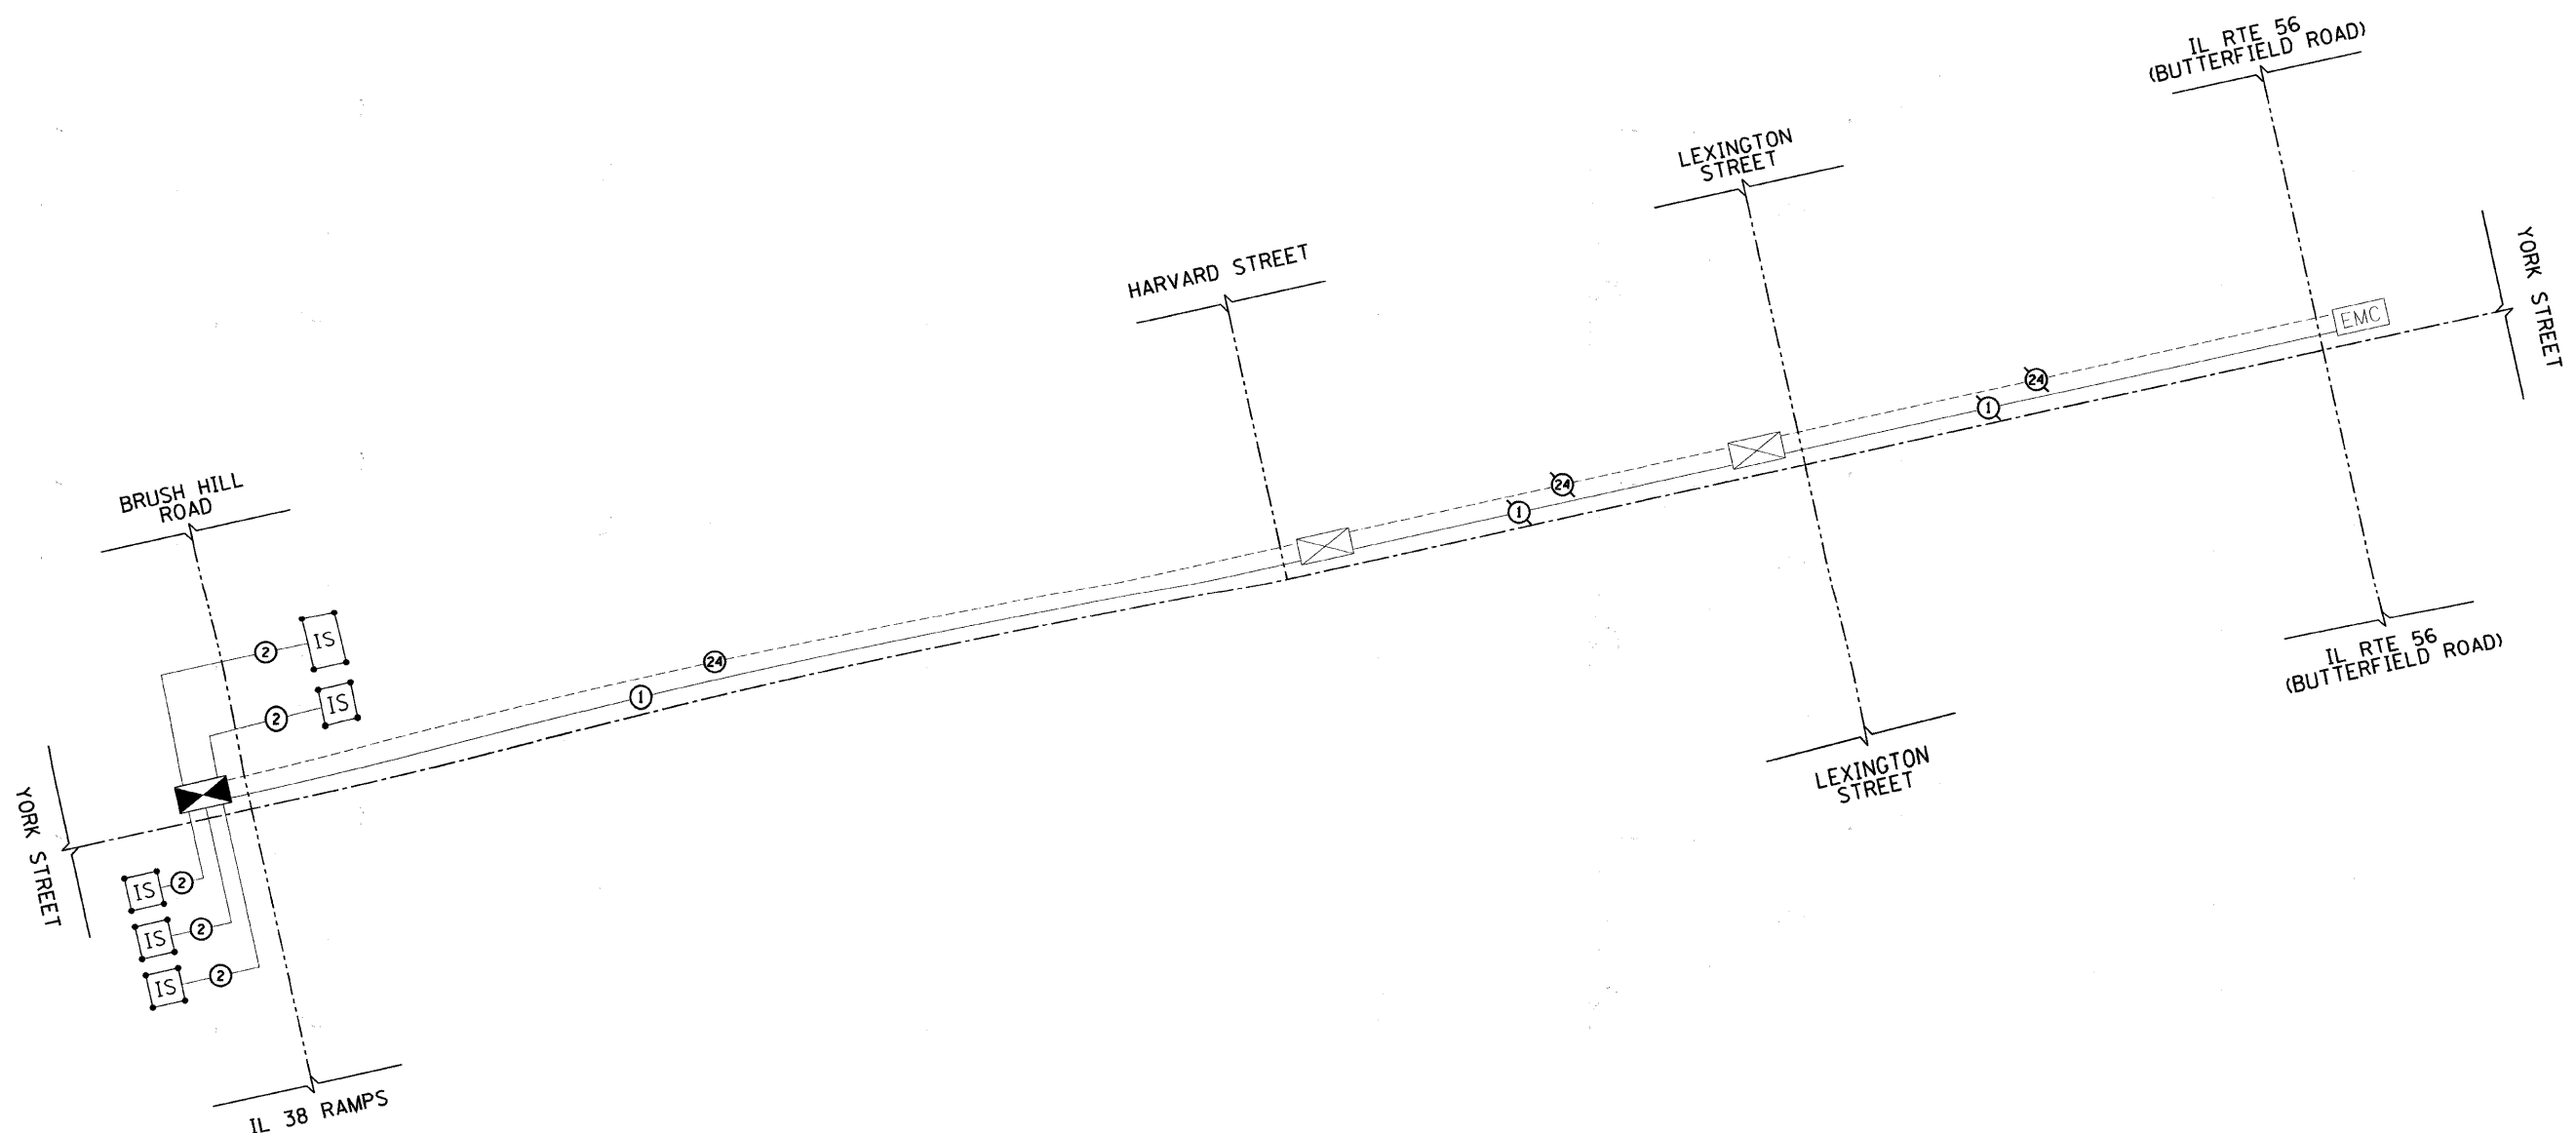

FILE NAME = g:\ch08\0007\road\phase 2\sheet\01X0007

USER NAME = jngolenba
 TS-InterconnectSheet2.dgn
 PLOT SCALE = 500.0000 1/ IN.
 PLOT DATE = 8/4/2011

DESIGNED - KB
 DRAWN - AJP
 CHECKED - KMM
 DATE - 7/4/2011

REVISED -
 REVISED -
 REVISED -
 REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**YORK STREET AT IL RTE 38 RAMPS/BRUSH HILL ROAD
 INTERCONNECT SCHEMATIC PLAN**

SCALE: NONE SHEET NO. 44 OF 85 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2678	09-00171-00-CH	DUPAGE	85	44
CONTRACT NO. 63610				
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT				