


PAVEMENT MARKING SCHEDULE																							
LOCATION	STATION	O/S	SHORT TERM PAVEMENT MARKING	TEMPORARY PAVEMENT MARKING LETTERS AND SYMBOLS	TEMPORARY PAVEMENT MARKING - LINE 5"	TEMPORARY PAVEMENT MARKING - LINE 24"	WORK ZONE PAVEMENT MARKING REMOVAL	RAISED REFLECTIVE PAVEMENT MARKER	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID - LETTERS AND SYMBOLS	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID - LINE 125MM	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID - LINE 600MM	MODIFIED URETHANE PAVEMENT MARKING - LINE 125MM	MODIFIED URETHANE PAVEMENT MARKING - LINE 150MM	MODIFIED URETHANE PAVEMENT MARKING - LINE 200MM	MODIFIED URETHANE PAVEMENT MARKING - LINE 300MM	GROOVING FOR RECESSED PAVEMENT MARKING 152MM	GROOVING FOR RECESSED PAVEMENT MARKING 178MM	GROOVING FOR RECESSED PAVEMENT MARKING 229MM	GROOVING FOR RECESSED PAVEMENT MARKING 330MM	PAVEMENT MARKING REMOVAL	PAINT PAVEMENT MARKING - LETTERS & SYMBOLS	
			FOOT	SQ FT	FOOT	FOOT	SQ FT	EACH	EACH	SQ M	METER	METER	METER	METER	METER	METER	METER	METER	METER	METER	SQ M	SQ M	
DIRKSEN PARKWAY																							
	6+795	6+818	RT																				
	6+797	6+816	RT																				
	6+811	6+840	LT					1			7.0												
	6+811	6+840	CL					3							28.8								
	6+811	N/A	LT									8.4											
	6+815	N/A	RT									3.8											
	6+815	6+840	RT					7			6.0												
	6+815	6+840	CL										50.0				50.0						
	6+823	N/A	CL							1.5													
CARPENTER STREET																							
	0+934	0+986	CL											105.0			105.0						
	0+986	N/A	RT									4.1											
	1+014	N/A	LT									4.3											
	1+014	1+081	CL										134.0				134.0						
ENOS AVENUE																							
	0+919	0+986	CL											133.2			133.2						
	0+986	N/A	RT									3.2											
	1+014	N/A	LT									3.0											
	1+014	1+092	CL										155.6				155.6						
ELM STREET																							
	0+919	0+984	CL											130.0			130.0						
	0+984	N/A	RT									7.4											
	1+015	N/A	LT									7.7											
	1+015	1+074	CL										118.0				118.0						
DIVISION STREET																							
	1+014	N/A	LT									8.0											
	1+014	1+055	CL										82.8				82.8						
N. GRAND STREET																							
	1+016	N/A	LT									7.8											
	1+016	1+059	CL										86.6				86.6						
RIDGE AVENUE																							
	0+945	0+970	RT											25.0			25.0						
	0+945	0+982	CL										74.0				74.0						
	0+946	N/A	RT							1.5													
	0+946	N/A	CL							2.5													
	0+970	N/A	RT							1.5													
	0+974	N/A	RT									6.2											
	0+975	N/A	CL							2.5													
	0+982	N/A	RT									3.6											
	1+022	N/A	LT									9.7											
	1+022	1+050	LT											27.4			27.4						
	1+022	1+050	CL										27.6				27.6						
	1+030	N/A	LT							1.5													
	1+030	N/A	CL							2.5													
CLEARLAKE AVENUE																							
	129+00	130+50	N/A			100	42																
	STAGE 2B			2209																			
	STAGE 3A/3B			2798																			
	TOTAL			5007	1554	52302	145	23407	406	263	124 89	725	113	7442	1081	47	32	7442	1081	47	32	387	93

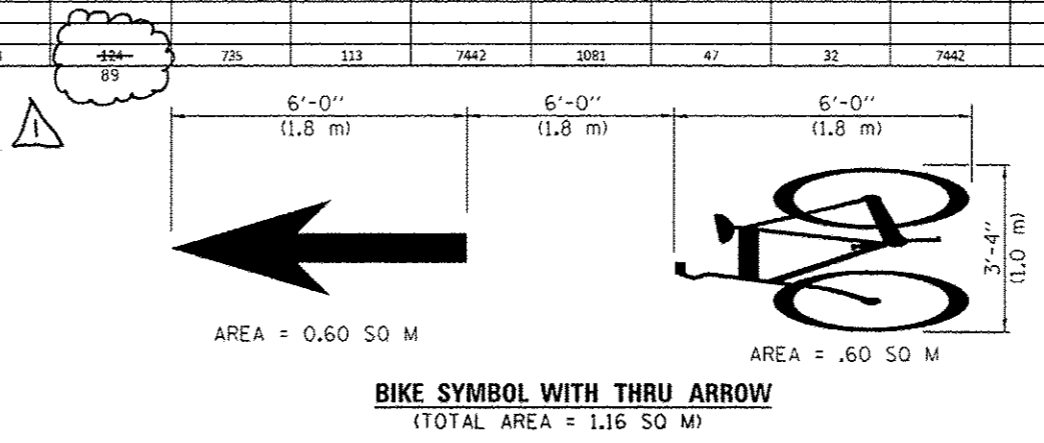

• - THE PAY ITEM FOR PAINT PAVEMENT MARKING - LETTERS & SYMBOLS IS USED FOR BIKE LANE SYMBOLOGY.

REV. 10/31/13

REVISIONS	NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF QUANTITIES
F.A.P. ROUTE 668 (DIRKSEN PARKWAY)
SECTION 28R-1
SANGAMON COUNTY

SCALE: NONE
DATE: 6/2013

DRAWN BY: RC
CHECKED BY: FML