

**PROPOSED ELECTRIC CONSTRUCTION
ALONG BAILEY RD. (DUPAGE COUNTY)
BETWEEN WASHINGTON ST. AND
COACH DR. AT THE DUPAGE RIVER
IN THE CITY OF NAPERVILLE, STATE OF ILLINOIS**

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
1545	00-00115-00-BR	DUPAGE	97	68
STA. 1+31.77		TO STA. 5+50.00		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CONTRACT 83961

GENERAL NOTES (CONTINUED)

- 17) THE CONTRACTOR SHALL PROVIDE TIME DURING CONSTRUCTION OPERATIONS FOR THE LANDSCAPER TO REMOVE, PRESERVE, AND REINSTALL ANY BUSH OR SHRUB. BUSHES, SHRUBS, VINES, AND SEEDINGS SHALL BE DUG UP WITH CARE, AVOIDING INJURY TO THE PLANTS OR LOSS OR DAMAGE OF THE ROOTS. IMMEDIATELY AFTER DIGGING, ROOTS SHALL BE PROTECTED AGAINST DRYING OUT AND FREEZING BY WRAPPING ROOT SYSTEM IN BURLAP. REMOVED VEGETATION SHALL BE PLACED IN TEMPORARY STORAGE EITHER ON SITE OR AT OTHER APPROVED LOCATIONS. IF LANDSCAPER IS UNABLE TO REUSE EXISTING VEGETATION, HE SHALL REPLACE WITH SAME SIZE AND SPECIES AT HIS OWN EXPENSE. COST OF THIS WORK SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED INCIDENTAL TO THE LANDSCAPING CONTRACT AND IS PART OF THE RESTORATION.
- 18) DURING CONSTRUCTION OPERATIONS, THE CONTRACTOR IS NOT ALLOWED TO PERMANENTLY STOCK PILE MATERIAL ON SITE. CONTRACTOR SHALL SUPPLY LIGHTED BARRICADES AROUND ALL STOCKPILES AND IS RESPONSIBLE FOR THE SECURITY OF ALL THE MATERIALS STORED OFF SITE.
- 19) ALL RESTORATION IS DIRECTED BY THE CITY PERMIT WHICH THE CONTRACTOR IS REQUIRED TO OBTAIN PRIOR TO STARTING WORK. ALL REQUESTS REQUIRED BY THE CITY SHALL BE HONORED AND COMPLETED BY THE LANDSCAPER AT NO EXPENSE TO THE CITY. THE LANDSCAPE CONTRACTOR SHALL PERFORM ALL RESTORATION PER CITY OF NAPERVILLE SPECIFICATIONS. THE CONTRACTOR SHALL PERFORM ALL WORK TO THE MOST RESTRICTIVE REQUIREMENT OF THE GOVERNING BODIES. THIS IS PART OF THE RESTORATION PRICE.
- 20) ALL IDENTIFIED OR SUSPECTED UNDERGROUND FACILITIES OR OBSTRUCTIONS SHALL BE LOCATED BY HAND DIGGING TO A DEPTH OF 8 FEET, WIDTH OF 4 FEET AND LENGTH OF 5 FEET AND IDENTIFIED BY NAME AND SIZE.
- 21) WHEN REPAIRING, REPLACING, OR INSTALLING ITEMS, THE ITEMS SUPPLIED BY THE CONTRACTOR SHALL BE NEW AND NOT USED.

- 22) THE COST TO LOCATE SUPPORT, MOVE AND PROTECT THE UTILITIES (SHOWN ON THE DRAWINGS) SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED INCIDENTAL TO WORK.
- 23) ALL MATERIALS REMOVED DURING THE CONSTRUCTION OF THE PROJECT AND DESIGNATED ON THE PLANS OR BY THE CITY AS SALVAGED MATERIALS SHALL BE REMOVED, CLEANED, AND STACKED AT THE DESIGNATED CITY OF NAPERVILLE SITE. ALL UNUSED MATERIALS SHALL BE THE PROPERTY OF THE CITY.
- 24) ALL MATERIALS REMOVED BY THE CONTRACTOR, SUCH AS POLES, WIRE, STEEL POLES, FOUNDATIONS, ANCHORS, GUYS, CROSS ARMS, INSULATOR GROUND WIRES, CONDUCTORS, AND HARDWARE AND DESIGNATED ON THE PLAN FOR REMOVAL SHALL BE REMOVED TO AN APPROPRIATE DUMP SITE FOR WASTE. DUMP TICKETS RECEIVED AND RETURNED TO THE CITY. ALL AREAS LEFT DAMAGED BY THE REMOVAL SHALL BE REPAIRED, REPLACED OR INSTALLED TO ROUGH GRADE.
- 25) THE CITY OF NAPERVILLE DOES NOT GUARANTEE A SEQUENCE OF WORK OR AVAILABILITY OF THE WORK AREA OR QUANTITY OF WORK.
- 26) ALL WORK WILL OCCUR DURING ALL 4 SEASONS OF THE YEAR. THEREFORE, THERE SHALL BE NO COMPENSATION PAID BY THE CITY FOR SNOW, ICE, RAIN, WIND, OR HOT OR COLD WEATHER. IT IS ASSUMED THE CONTRACTOR HAS INCLUDED THESE ITEMS IN THE PRICING.

27) THE CONTRACTOR IS ADVISED THAT JOINTED, FISSURED ROCK, LARGE BOULDERS (12 INCHES OR LARGER) AND VERY TOUGH STRATIFIED ROCK/SHALE EXISTS FROM 1'-0" TO 5'-0" BELOW GRADE AND SOLID ROCK EXISTS FROM 5'-0" TO 20'-0" BELOW GRADE AND REQUIRES ADDITIONAL WORK AND IS INCLUDED IN THE COST OF INSTALLING THE DUCT BANK OR HAND HOLE WORK OR RISER WORK. THE CONTRACTOR WILL EXCAVATE IN ROCK ACCORDING TO SECTION 502 OF THE STANDARD SPECIFICATIONS FOR ROCK EXCAVATION FOR STRUCTURES. THE BOTTOM OF THE TRENCH SHALL BE LINED WITH 2 INCHES OF PA2 MATERIALS OR CA-6 MATERIALS TO FROM A BEDDING FOR THE DUCT PACKAGE AND IS INCIDENTAL TO THE COST.

28) THE CONTRACTOR SHALL COORDINATE AND PERFORM ALL WORK OR AS MUCH AS POSSIBLE USING TRAFFIC CONTROL AND LANE CLOSURES AS REQUIRED FOR THE BRIDGE WORK. ALL ELECTRICAL WORK REQUIRING A LANE CLOSURE OR TRAFFIC CONTROL SHALL ONLY BE ACCEPTED IF THE BRIDGE WORK IS NOT INVOLVED. THE CONTRACTOR TO INCLUDE THESE COSTS UNDER THE TRAFFIC CONTROL PAY ITEM.


29) THE CONTRACTOR SHALL, DURING THE PROGRESS OF THE JOB, NOTE ANY AND ALL CHANGES OR DEVIATIONS FROM THE ORIGINAL DRAWING. THE CONTRACTOR SHALL PROVIDE THE ENGINEER WITH A COPY OF ALL RECORDED DIMENSIONS AND ELEVATIONS. ALL MANHOLES, HAND HOLES VAULTS OR RISERS, BENDS AND FITTINGS, SHALL BE TIED TO A MINIMUM OF TWO PERMANENT VISIBLE POINTS (I.E. PROPERTY IRONS AND BUILDINGS). DEVIATIONS FROM CHANGES IN GRADE SHALL ALSO BE NOTED ON THE RECORD DRAWINGS.

30) WATER MAIN VALVES, INCLUDING TAP VALVES, ADJACENT TO AN EXISTING WATER MAIN, AND EXISTING WATER MAIN VALVES SHALL ONLY BE OPERATED BY THE CITY OF NAPERVILLE, DEPARTMENT OF PUBLIC UTILITIES CEE/CM DIVISION PERSONNEL WITH 48-HOURS NOTICE (MONDAY-FRIDAY) 630-420-4122.

UTILITY CONTACTS:

CITY OF NAPERVILLE:

- NDPU- WATER AND WASTEWATER
MR. PAT EYRE
(630) 420-4122
- NDPU- ELECTRIC
MRS. LUCY HYNES
(630) 305-5375
- NDPW- PUBLIC WORKS
MR. DAN VORREN
(630) 548-2981
- TED- TRANSPORTATION, ENGINEERING &
DEVELOPMENT BUSINESS GROUP
MR. BILL NOVAK
(630) 420-6704
- OTHER UTILITIES:**
- SBC AMERITECH MR. GREG LAWRENCE
AT&T- (630) 462-5846
MS. DONNA SZPYTEK
(630) 941-4223
- COMCAST- MR. BOB SCHULTER
(630) 600-6347
- COMMONWEALTH EDISON- MR. LYNN CHRISTENSON
(630) 723-2303
- NICOR GAS- MS. CONSTANCE LANE
(630) 988-8676
X3830
- WIDE OPEN WEST- MR. TOM JEBENS
(630) 536-3153
MR. JIM PIRTANO
(630) 669-2707
- DUPAGE COUNTY PERMIT ADMINISTRATOR- MR. ROBERT KOLARS
401 N. COUNTY FARM RD.
WHEATON, IL 60187
(630) 407-6886

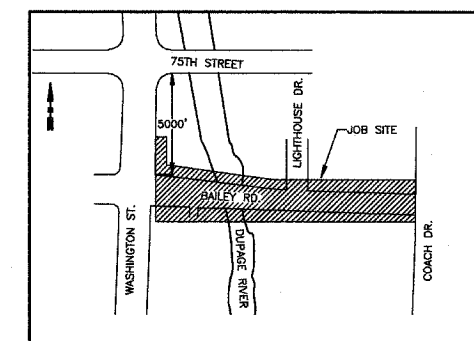

LOCATION MAP
N.T.S.

CITY OF NAPERVILLE/DEPARTMENT OF PUBLIC UTILITIES - ELECTRIC			
CALL JULIE, 48 HRS. PRIOR TO CONSTRUCTION			
PROJECT NO.	DATE	ISSUED	SCALE
BAILEY RD. BRIDGE DUCTBANK INSTALLATION	06-19-07	58199	NTS
PROJECT NO. 2054/1323	DATE	ISSUED	SCALE
008198001C2.DWG	JK	58199	NTS
PROJECT NO. EU12-06-04	DATE	ISSUED	SCALE
COMPLETED BY	DATE	ISSUED	SCALE
SHEET 2 OF 23			