

ROUTE NO. SEC		COUNTY		SIEEAS	SHEET NO.	
FAU 6145	*	LASALLE		168	129	SHEET NO. 8 23 SHEETS
FED. ROAD E	HST. NO. 3	ILLINOIS	PROJECT	***************************************		

* 01-00590-00-BR (County)


CONTRACT NO. 87293




TRANSVERSE SAWED CONSTRUCTION JOINT DETAIL
(In Anchorage Slab)



<u>SECTION C-C</u> (Transverse Expansion Joint)



LONGITUDINAL CONSTRUCTION JOINT GROUTED-IN-PLACE TIE BAR (See Art. 420.10(d) of Standard Specifications)

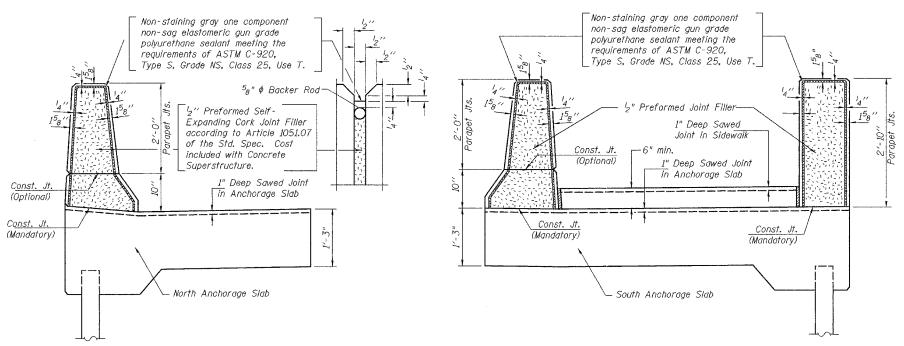

PARAPET JOINT, SLAB & SIDEWALK CONTRACTION JOINT DETAIL

NOTES

Reinforcement bars designated (E) shall be epoxy coated. All edges shall have a 34 " chamfer unless noted otherwise. Sawed Construction Joints and Construction Joints in Shoulders, and grooved joints and expansion joints in Parapets, shall align with sawed contractions joints in PCC Pavement (Jointed)

Hot poured

joint sealer

Finish corners

with edger

PARAPET, SHOULDER

& PAVEMENT JOINT DETAILS

FAU ROUTE 6145

SECTION 01-00590-00-BR (COUNTY)

LASALLE COUNTY

STATION 16+66.11 TO 27+40.27

<u>Pre</u>formed

SEALING DETAIL

HUTCHISON ENGINEERING, INC.
JACKSONVILLE & JOLIET, ILLINOIS
Date: 3 /10 /2006

DESIGNED

CHECKED

DRAWN

CHECKED

J0H

BRT

TD

J0H