


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	I29K	WINNEBAGO	585	176
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

• 190/ IL 173

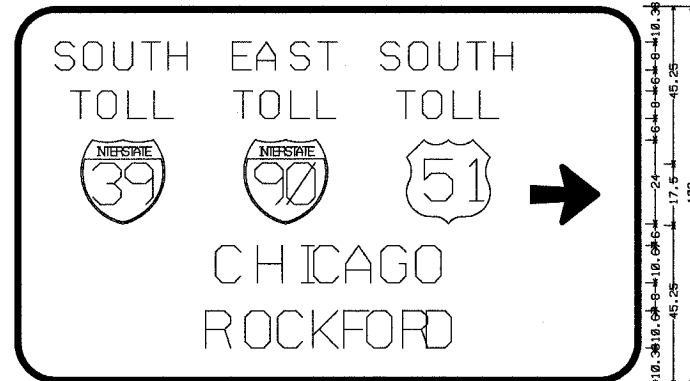

11.74	38.76	12	38.65	12	38.76	4	20.25	11.74
16.24	29.86	16.84	29.87	16.84	29.86	48.49		
19.17	24	22.71	24	22.7	24	43.42		
57.76	64.40	57.76						
54.95	70.09	54.95						

I-90 AT IL 173 - SIGN #2 - STA. 188+00 LEFT; 12.00' RADIUS, 2.00' BORDER, WHITE ON GREEN; [SOUTH] E MOD; [EAST] E MOD; [SOUTH] E MOD; [TOLL] E MOD; [TOLL] E MOD; [TOLL] E MOD; [CHICAGO] E MOD; [ROCKFORD] E MOD; ARROW CUSTOM - 20.25' Ø;

TABLE OF WIDTHS AND SPACES.

S	I	O	U	T	H	E	A	S	T
11.74	38.76	12	38.65	12	38.76	4	20.25	11.74	
S	I	O	U	T	H	E	A	S	T
12.00	38.76	12	38.65	12	38.76	4	20.25	11.74	
T	O	L	L	T	O	L	L	T	O
16.24	29.86	16.84	29.87	16.84	29.86	48.49			
T	O	L	L	T	O	L	L	T	O
16.84	29.86	16.84	29.87	16.84	29.86	48.49			
S	I	O	U	T	H	E	A	S	T
19.17	24	22.71	24	22.7	24	43.42			
C	H	I	C	A	G	O	R	O	C
57.76	64.40	57.76							
R	O	C	K	F	O	R	D		
54.95	70.09	54.95							

STA 188+00 LT



6.84	28.25	8	39.10	12	31.65	12	39.16	8.84
41.79	29.86	17.54	29.87	17.54	29.86	13.54		
44.72	24	23.41	24	23.4	24	16.47		
57.29	65.54	57.29						

I-90 AT IL 173 - SIGN #3 - STA. 188+00 RIGHT; 12.00' RADIUS, 2.00' BORDER, WHITE ON GREEN; ARROW CUSTOM - 20.25' Ø; [NORTH] E MOD; [WEST] E MOD; [NORTH] E MOD; [TOLL] E MOD; [TOLL] E MOD; [MADISON] E MOD;


TABLE OF WIDTHS AND SPACES.

N	W	E	S	T
8.84	28.25	8	39.10	12
N	W	E	S	T
12.00	28.25	8	39.10	12
T	O	L	L	T
41.79	29.86	17.54	29.87	17.54
T	O	L	L	T
17.54	29.86	17.54	29.87	17.54
M	A	D	I	S
44.72	24	23.41	24	23.4
W	E	S	T	
57.29	65.54	57.29		

STA 188+00 RT

SIGN DETAIL SHEET

District: 2 Direction of Travel: EB
 Route: IL 173 Station Number: 188+00 LEFT
 Exit No. Milepost Number:
 County: Winnebago Offset from Edge of Pavement: 5
 Sign Code Not.: I

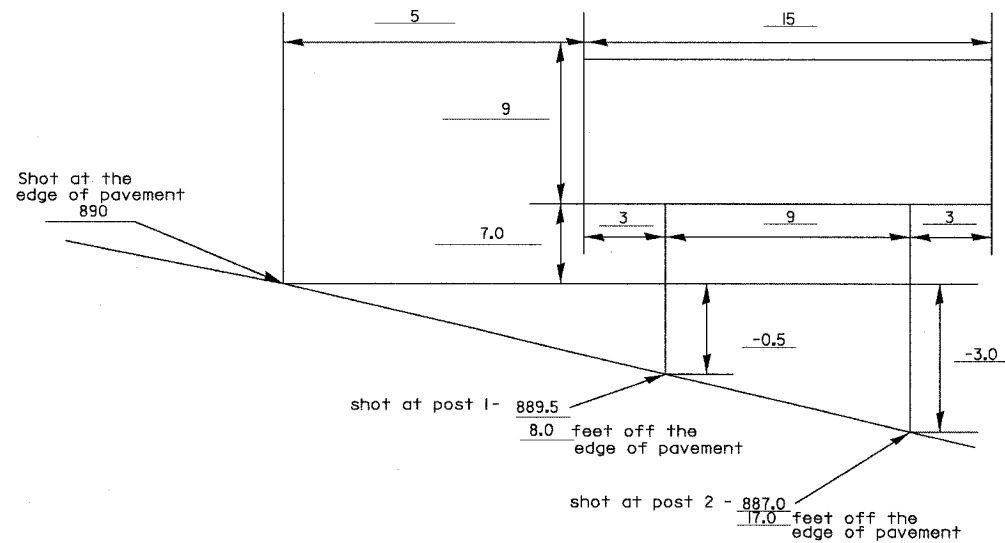


LENGTH OF POST 1 - 9 FT 0 IN + 6 FT 6 IN - 2.5 IN = 15 FT 3 IN
 LENGTH OF POST 2 - 16 FT 6 IN + 8 FT 6 IN - 2.5 IN = 24 FT 10 IN

Sign Panel(s) = 135.00 sq. ft. L1 (Excluding Stub Post) = 15 FT. 3 IN.
 Post Size = W 8 X 18 L2 (Excluding Stub Post) = 12 FT. 9 IN.
 Concrete foundations = 0.70 cu. Yd. Each Stub Post lengths = 2 FT. 6 IN.
 Total Post Weight (Including Stub Posts) = 594.00 lbs.

SIGN DETAIL SHEET

District: 2 Direction of Travel: EB
 Route: IL 173 Station Number: 188+00 RIGHT
 Exit No. Milepost Number:
 County: Winnebago Offset from Edge of Pavement: 5
 Sign Code Not.: I

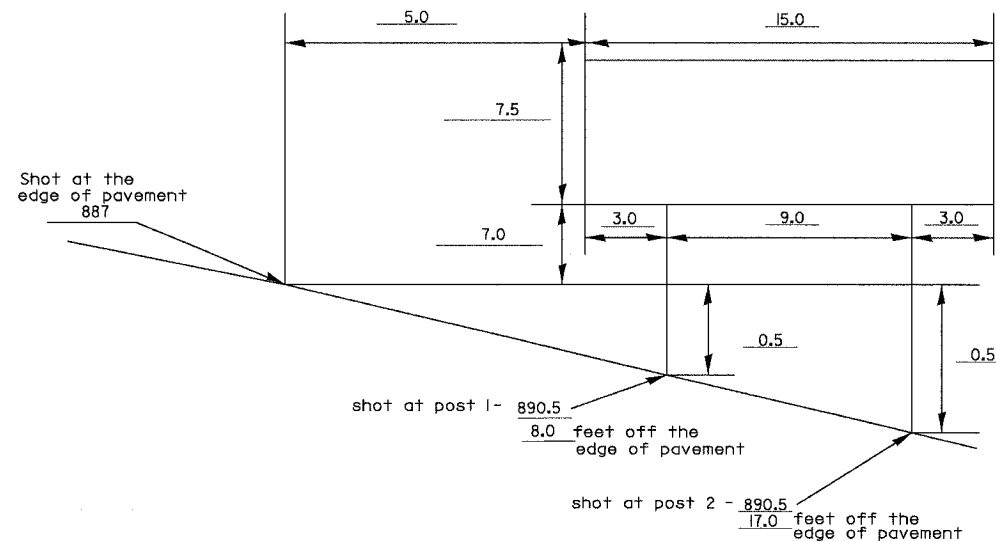

LENGTH OF POST 1 - 7 FT 6 IN + 7 FT 6 IN - 2.5 IN = 14 FT 9 IN
 LENGTH OF POST 2 - 7 FT 6 IN + 7 FT 6 IN - 2.5 IN = 14 FT 9 IN

Sign Panel(s) = 112.50 sq. ft. L1 (Excluding Stub Post) = 14 FT. 9 IN.
 Post Size = W 6 X 15 L2 (Excluding Stub Post) = 14 FT. 9 IN.
 Concrete foundations = 0.70 cu. Yd. Each Stub Post lengths = 2 FT. 6 IN.
 Total Post Weight (Including Stub Posts) = 517.50 lbs.

PLOT DATE = #DATE#
 FILE NAME = #FILE#
 USER NAME = #USER#