PART OF THE SW 1/4 SECTION 3 IN TOWNSHIP 43 NORTH, RANGE 8 EAST OF THE 3rd PM, ALGONQUIN TOWNSHIP, McHENRY COUNTY, ILLINOIS.

PARCEL NUMBER	OWNER	TOTAL HOLDING ACRES	PART TAKEN ACRES	REMAINDER ACRES	PREV. USED ACRES	EASEMENT ACRES	EASEMENT PURPOSE	PERMANENT TAX INDEX NUMBER	PROPERTY ACQUIRED BY
PARCEL 0006	GENERAL KINEMATICS CORPORATION, AN ILLINOIS CORPORATION	11.164	0.063	11.101				19-03-302-003 19-03-301-005 19-03-302-002	
PARCEL 0006TE						0.011	DRIVEWAY RECONSTRUCTION		

COORDINATE TABLE		
STATION / OFFSET	NORTHING	EASTING
183+58.64 / 0.00' LT	2026641.03	994284.99
183+82.35 / 108.47' LT	2026617.06	994393.40
183+96.06 / 93.62' LT	2026603.39	994378.52
184+25.44 / 94.28' LT	2026574.00	994379.10
184+25.79 / 61.43' LT	2026573.73	994346.25
184+43.27 / 42.50' LT	2026556.29	994327.28
186+82.58 / 42.50' LT	2026316.99	994326.71
186+95.25 / 0.00' LT	2026304.42	994284.18
252+88.32 / 0.00' LT	2026643.99	994573.29

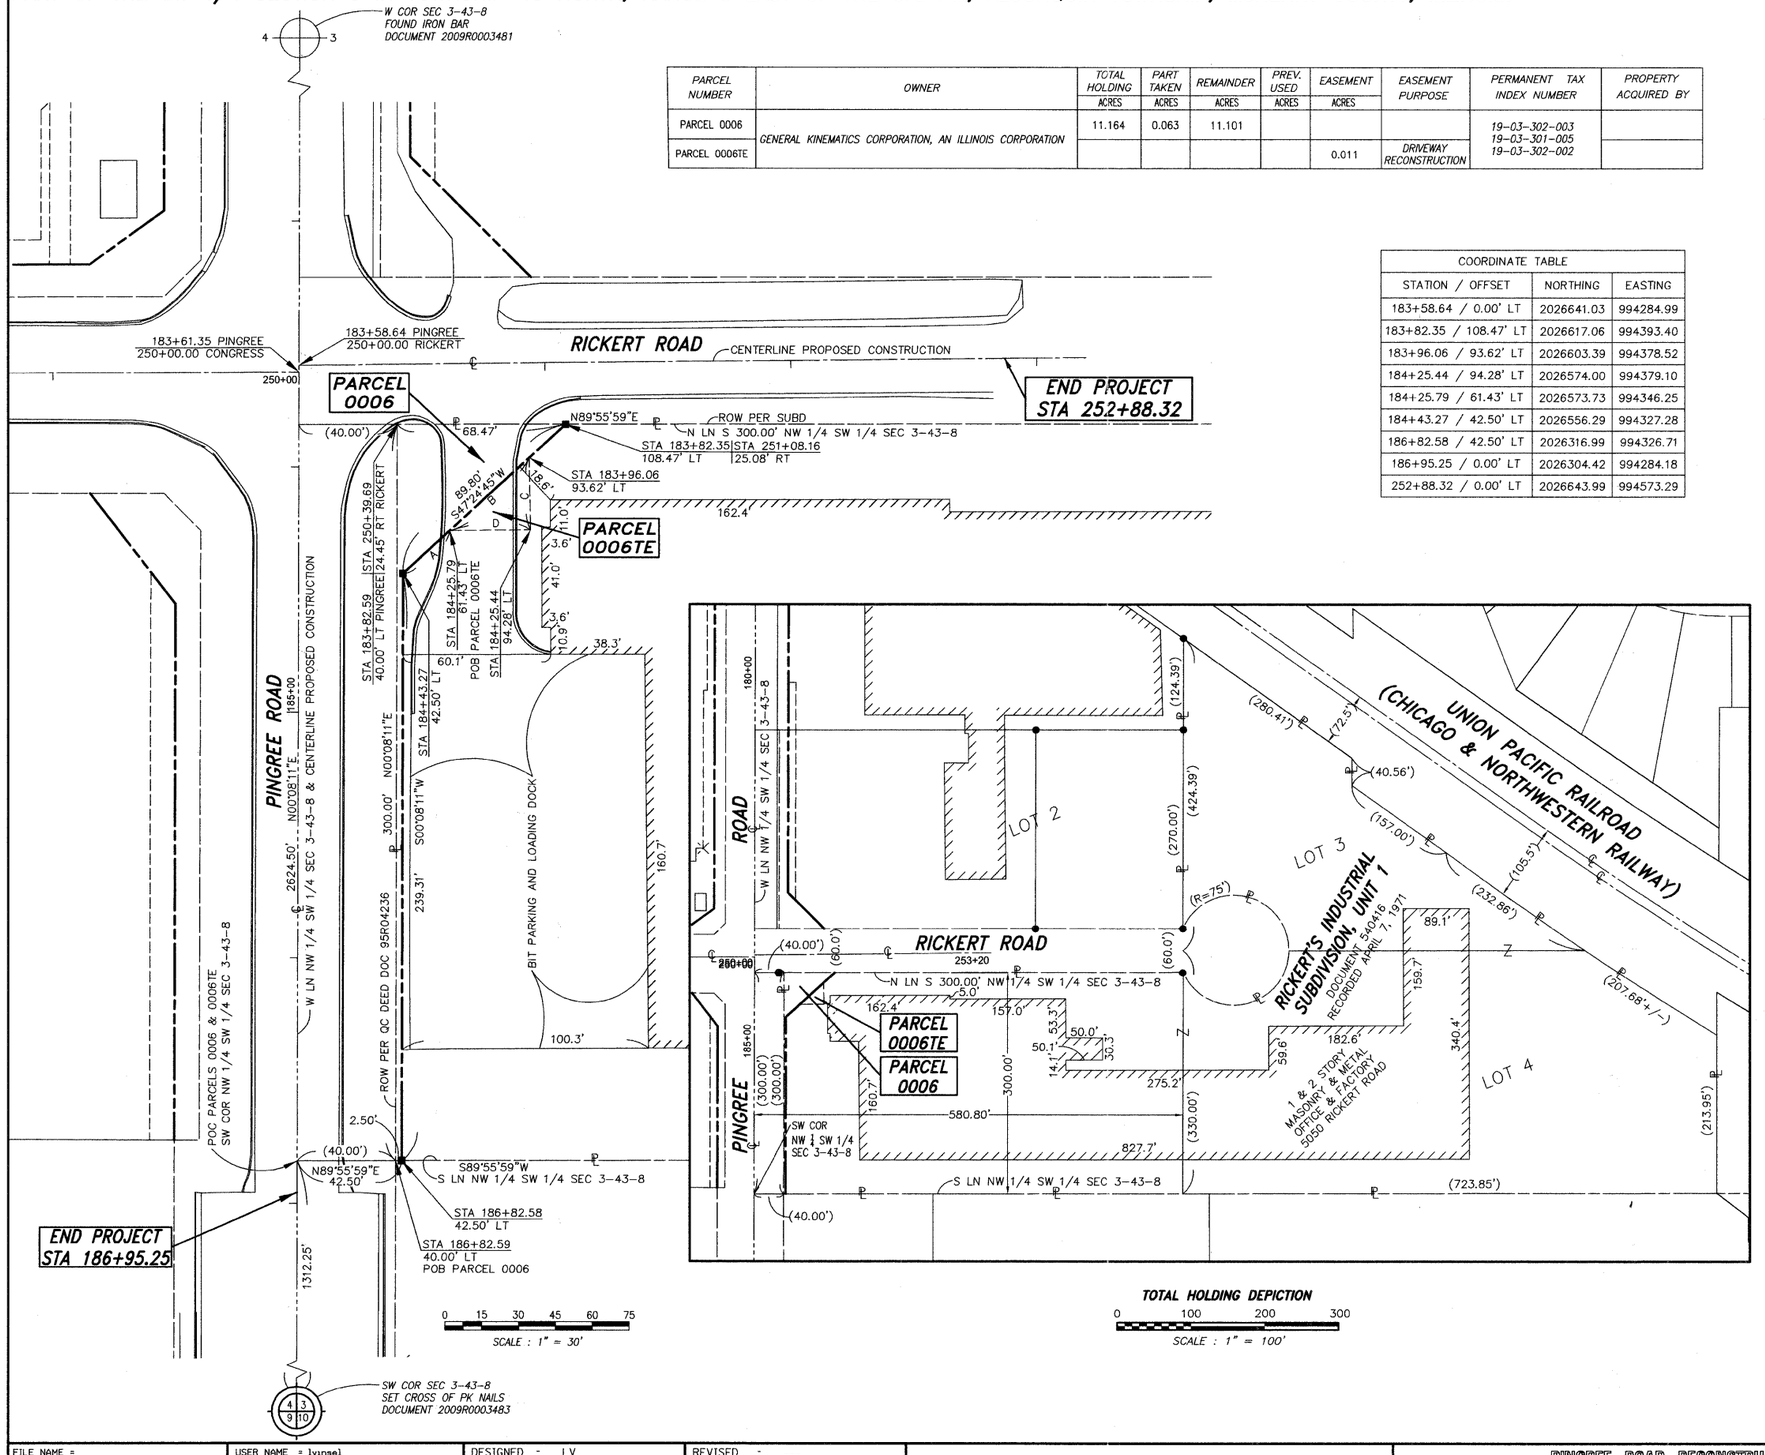

LEGEND

SECTION CORNER

QUARTER SECTION CORNER

SECTION LINE
QUARTER SECTION LINE
QUARTER, QUARTER SECTION LINE
PLATTED LOT LINE
℄ PROPERTY (DEED) LINE
APL APPARENT PROPERTY LINE
℄ CENTERLINE
EXISTING RIGHT OF WAY LINE
PROPOSED RIGHT OF WAY LINE
PROPOSED EASEMENT
AC EXISTING ACCESS CONTROL LINE
-AC- PROPOSED ACCESS CONTROL LINE
123.45' MEASURED DIMENSION
123.45' (COMP) COMPUTED DIMENSION
(123.45') RECORD DATA
EXISTING BUILDING

BEARINGS BASED ON ILLINOIS STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD83

∘ IRON PIPE OR ROD FOUND ○ SET 5/8" x 30" REBAR
\+ CUT CROSS FOUND OR SET ●PK FOUND PK NAIL ○PK SET PK NAIL

∘ T1 **THESE STAKES REFERENCE FOUND OR SET MONUMENTATION.**
T2 SET 5/8 INCH REBAR FLUSH WITH GROUND TO TIE FOUND IRON STAKE. IDENTIFIED
T3 BY COLORED PLASTIC CAP AND BEARING SURVEYORS PROFESSIONAL NUMBER.

∘ BT1 **THESE STAKES, IN CULTIVATED AREAS, REFERENCE FOUND OR SET MONUMENTATION.**
BT2 BURIED 5\8 INCH REBAR 20 INCHES BELOW GROUND TO TIE FOUND IRON STAKE.
BT3 IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS PROFESSIONAL NUMBER.

■ **STAKING OF PROPOSED RIGHT OF WAY.**
SET DIVISION OF HIGHWAYS SURVEY MARKER TO MONUMENT THE POSITION SHOWN. IDENTIFIED BY INSCRIPTION DATA AND SURVEYORS PROFESSIONAL NUMBER.

■ M **STAKING OF PROPOSED RIGHT OF WAY IN CULTIVATED AREAS.**
BURIED 5/8 INCH REBAR 20 INCHES BELOW GROUND TO MARK FUTURE SURVEY MARKER POSITION. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS PROFESSIONAL NUMBER.

PERMANENT SURVEY MARKER. IDOT STD. 2135 (TO BE SET BY OTHERS)

RIGHT OF WAY STAKING PROPOSED TO BE SET.

STATE OF ILLINOIS } SS
COUNTY OF DUPAGE }

THIS IS TO CERTIFY THAT I, LANCE A. VINSEL, AN ILLINOIS PROFESSIONAL LAND SURVEYOR, HAVE SURVEYED THE PLAT OF HIGHWAYS SHOWN HEREON IN SECTIONS 3 AND 4, TOWNSHIP 43 NORTH, RANGE 8 EAST OF THE THIRD PRINCIPAL MERIDIAN, McHENRY COUNTY, ILLINOIS; THAT THE SURVEY IS TRUE AND CORRECT AS SHOWN TO THE BEST OF MY KNOWLEDGE AND BELIEF; THAT THE PLAT CORRECTLY REPRESENTS SAID SURVEY; THAT ALL MONUMENTS FOUND AND ESTABLISHED ARE OF PERMANENT QUALITY AND OCCUPY THE POSITIONS SHOWN THEREON AND THAT THE MONUMENTS ARE SUFFICIENT TO ENABLE THE SURVEY TO BE RETRACED. MADE FOR THE ILLINOIS DEPARTMENT OF TRANSPORTATION, STATE OF ILLINOIS.

DATED AT LOMBARD, ILLINOIS THIS 26th DAY OF August 2011 A.D.

LANCE A. VINSEL NO. 2891 LOMBARD — PROFESSIONAL LAND SURVEYOR — STATE OF ILLINOIS

Lance Vinsel

ILLINOIS PROFESSIONAL LAND SURVEYOR NO. 2891
LICENSE EXPIRATION DATE NOVEMBER 30, 2012

THIS PROFESSIONAL SERVICE CONFORMS TO THE CURRENT ILLINOIS MINIMUM STANDARDS FOR A BOUNDARY SURVEY.

LINE TABLE		
LINE NAME	BEARING	DISTANCE
A	N47°24'45"E	25.76'
B	N47°24'45"E	43.83'
C	S01°07'52"E	29.39'
D	S89°31'05"W	32.85'

MILLENNIA PROFESSIONAL SERVICES
200 WEST 22ND STREET, SUITE 216
LOMBARD, ILLINOIS 60148

JOB #MEG0814

PLAT OF HIGHWAYS

STATE OF ILLINOIS
McHENRY COUNTY
CITY OF CRYSTAL LAKE
PINGREE ROAD

SECTION: 95-0090-01-FP *McHENRY COUNTY*
PROJECT: M-9003(661) *JOB NO.: R-55-001-97*
STATION 183+82.35 *TO STATION 186+95.25*
SCALE: 1' = 30' *SHEET 5 OF 5*

FILE NAME =	USER NAME = lvinsel	DESIGNED - LV	REVISED -
sheet5_rev3		DRAWN - LV	REVISED -
	PLOT SCALE = 1:1	CHECKED - CB	REVISED -
	PLOT DATE = 08/26/11	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PINGREE ROAD RECONSTRUCTION
PLAT OF HIGHWAYS

SCALE: _____ SHEET NO. 4 OF 92 SHEETS STA. _____ TO STA. _____

F.A.U RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
126	95-00090-01-FP	McHENRY	92	48
		CONTRACT NO. 63519		
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		