


SCHEDULE OF QUANTITIES

ITEM	UNIT	QTY.
CONDUIT IN TRENCH, 2" DIA., GALVANIZED STEEL	FOOT	5,518
CONDUIT PUSHED, 2" DIA., GALVANIZED STEEL	FOOT	1,753
HANDHOLE	EACH	10
TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	5,518
FIBER OPTIC CABLE IN CONDUIT, NO. 62.5/125, MM12F SM12F	FOOT	16,166
ELECTRIC CABLE IN CONDUIT, TRACER, NO. 14 1C	FOOT	15,974
DRILL EXISTING HANDHOLE	EACH	4
DETECTOR LOOP, TYPE I	FOOT	255

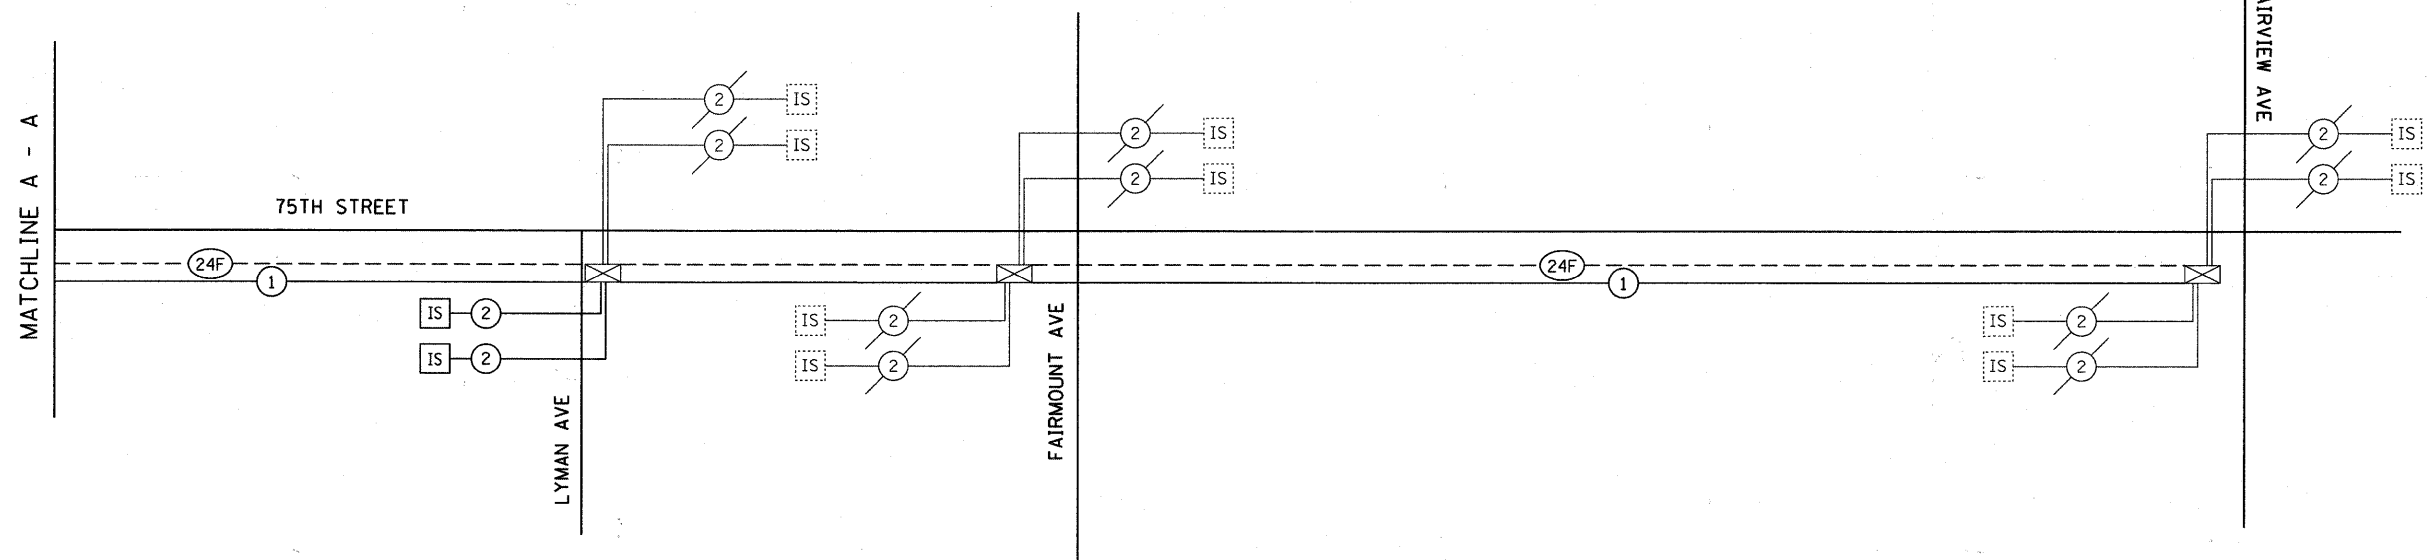

FILE NAME = F:\451-030 75th st dupage det\engineering\drawings\451-030-att-1-interconnect-schematic.dgn

**B** Bollinger, Lach & Associates, Inc.  
ITASCA, ILLINOIS

USER NAME = gellwenger	DESIGNED - GJE	REVISED -
PLOT SCALE = 50,0000' / IN.	DRAWN - DC	REVISED -
PLOT DATE = 9/7/2011	CHECKED - JP	REVISED -
	DATE - 9/08/11	REVISED -

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

INTERCONNECT SCHEMATIC	
75TH STREET	
FROM JANE'S AVE TO FAIRVIEW AVE	
SCALE: NONE	STA. TO STA.
SHEET NO. 132 OF 198 SHEETS	

F.A.P. RTE. 0369	SECTION 07-00232-04-WR	COUNTY DuPAGE	TOTAL SHEETS 198	SHEET NO. 132
CONTRACT NO. 63632				
ILLINOIS FED. AID PROJECT				