

NOTES

Detail I - With Bar Splicer or Couplers:

Connect one (1) I'' x 7' 'x ''W'' steel 12 to the top layer of couplers with 2-58'' \$\phi\$ bolts screwed to coupler at approximate \$\mathbb{Q}\$ of each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1'' x 7'' x ''W'' steel ₱ to the concrete slab or concrete wearing surface with 2-58'' ♦


Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate ♀ of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The $1^{\prime\prime}$ x $7^{\prime\prime}$ x $^{\prime\prime}$ W $^{\prime\prime}$ plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM

- *** Dimension shown is minimum required embedment into concrete.

 If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

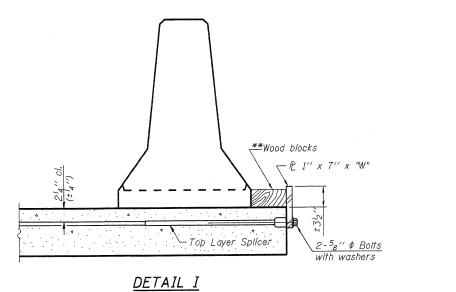

##Wood blocks

Wood blocks


#5 bars

#5 bars

2-5g'' \Phi Expansion Anchors or cast in place inserts with a certified min. proof load of 5,000 Lbs.

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"



STEEL RETAINER & 1" x 7" x "W"

* Required only with Detail II

R-27

7-1-10

FEHR-GRAHAM & ASSOCIATES, LLC ENGINEERING AND SCIENCE CONSULTANT

10	•					
	FILE NAME = 0520080-64057.DGN	DESIGNED	-	J.A.M.	REVISED	-
	USER NAME = S.A.P.	CHECKED	-	A.R.K.	REVISED	**
s	PLOT SCALE =	DRAWN	-	S.A.P.	REVISED	-
	PLOT DATE = 08/10/11	CHECKED	-	J.A.M. & A.R.K.	REVISED	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY	CONCRETE STRUC							CONSTRUCTION	
	SHEET	NO. 2	29	0F	32	SHEE	TS		

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.			
316	102BR-5	LEE	216	130			
		CONTRACT NO. 64D57					
ILLINOIS FED. AID PROJECT							