


SIGN LEGEND

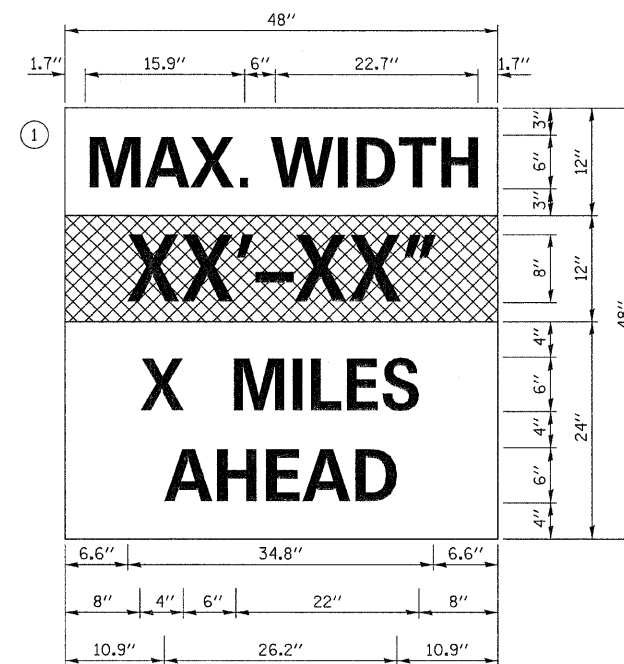

W12-I103

W12-I103 (WIDTH IS 80)
 NO BORDER, BLACK ON WHITE:
 "MAX WIDTH" D:
 NO BORDER, BLACK ON ORANGE:
 "XX'-XX'' D:
 NO BORDER, BLACK ON WHITE:
 "X MILES" D: "AHEAD" D:

DETOUR NOTES

1. THE CONTRACTOR SHALL FURNISH THE POSTS AND ERECT THE SIGNS AT THE LOCATION DIRECTED BY THE ENGINEER. ALL SIGNS SHALL BE POST MOUNTED.
2. THE ABOVE NOTED WORK, INCLUDING SIGNS, POSTS, HARDWARE AND LABOR SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE, EACH, FOR TRAFFIC CONTROL AND PROTECTION. STD. 701321 AND NO OTHER COMPENSATION WILL BE ALLOWED.
3. THE WIDTH SHOWN ON THE W12-I103 SIGN SHALL BE 10'-6" FOR STAGE 1, AND 12'-0" FOR STAGE 2, OR AS DIRECTED BY THE ENGINEER. THE "X" MILES AHEAD WILL BE DETERMINED BY THE ENGINEER.

FILE NAME = 092148-sht-detour.dgn	USER NAME =	DESIGNED - L.F.S.	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	WIDE LOAD DETOUR U.S. ROUTE 45			F.A.P.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.			
HAMPTON, LENZINI AND RENWICK, INC. 3335 STEVENSON DRIVE, SUITE 201 SPRINGFIELD, ILLINOIS 62703		DRAWN - T.W.K.	REVISED -		SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.	328	105B-1	WHITE	54	19
HLR ILLINOIS PROFESSIONAL DESIGN FIRM L3 / PE / SE CORP. 184.000599	PLOT SCALE =	CHECKED - J.W.F.	REVISED -		CONTRACT NO. 78161										
	PLOT DATE = 7/13/2011	DATE - 04/05/11	REVISED -		ILLINOIS FED. AID PROJECT										