

TYPICAL CROSS SECTION SHOWING STEP CONSTRUCTION ON EXISTING FILL

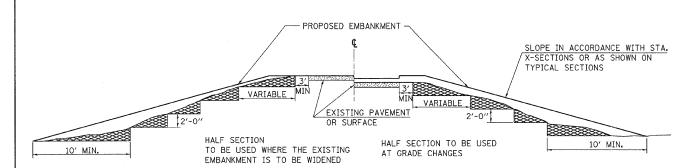

MATERIAL TO BE REMOVED AND REPLACED IN THE EMBANKMENT IN ACCORDANCE WITH ART. 205.04 OF THE STANDARD SPECIFICATION. COST TO BE INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED BECAUSE OF THIS WORK.

STA 653+18.00(N) STA 658+71.00(S)

SEEDING & MULCHING

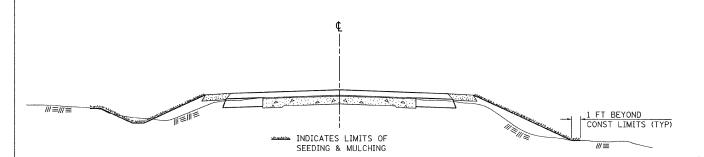

GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CON-STRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIME-STONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

UNEVEN LANES SIGN W8-11 (48" x 48")

SCALE:

LEGEND AND BORDER - BLACK NON-REFLECTORIZED BACKGROUND - ORANGE REFLECTORIZED

NOTE: PRIOR TO ALLOWING TRAFFIC ON ANY PORTION OF THE ROADWAY THAT HAS BEEN COLDMILLED OR BEFORE RESURFACING OPERATIONS BEGIN, THE CONTRACTOR SHALL HAVE ERECTED "UNEVEN PAVEMENT" SIGNS THAT CONFORM TO THE ABOVE DETAILS. A MINIMUM OF ONE SIGN AT EACH END OF THE IMPROVEMENT WILL BE REQUIRED. THE CONTRACTOR SHALL MAINTAIN THE "UNEVEN PAVEMENT" SIGNS UNTIL THE RESURFACING OPERATIONS ARE COMPLETED.

> IF AT ANY TIME THE SIGNS ARE IN PLACE BUT NOT APPLICABLE, THEY SHALL BE TURNED FROM THE VIEW OF MOTORISTS OR COVERED AS DIRECTED BY THE

THE COST OF FURNISHING, ERECTING, MAINTAINING, AND REMOVING THE REQUIRED SIGNS SHALL BE INCLUDED IN THE CONTRACT.

SECTION A-A

└ 11/2" MIN

BUTT JOINT

¢ US ROUTE 45 ─

| 30' HOT-MIX ASPHALT SURFACE REMOVAL (VAR)

1:240 TAPER

E SHLD ---

HOT-MIX ASPHALT SHLD

HOT-MIX ASPHALT SURF CSE /MIX C, N90 (11/2" MIN.)

LEVELING BINDER
MACHINE METHOD, N90

ZVARIABLE (3/4" MIN)

AGG SHLD

1				
FILE NAME = 090148-sht-standards-d9.dgn USER NAME =			DESIGNED - L.F.S.	REVISED -
НАМРТО	N, LENZINI AND RENWICK, INC.		DRAWN - T.W.K.	REVISED -
	3085 STEVENSON DRIVE, SUITE 201 SPRINGFIELD, ILLINOIS 62703	PLOT SCALE =	CHECKED - J.W.F.	REVISED -
	ILLINOIS PROFESSIONAL DESIGN FIRM LS / PE / SE CORP. 184.000859	PLOT DATE = 7/13/2011	DATE - 04/05/11	REVISED -

EXIST PVMT

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

STANDARD DETAILS DISTRICT 9	F.A.P.	
US ROUTE 45	328	
	1	
SHEET NO. 1 OF 2 SHEETS STA. TO STA.		***************************************

COUNTY

SECTION 105B-1 CONTRACT NO. 78161