

117-6

SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
091 88 101B-1 FA 40	WHITESIDE	31	1

P-92-013-63



LOCATION OF SECTION INDICATED THUS: —

**STATE OF ILLINOIS
DEPARTMENT OF PUBLIC WORKS AND BUILDINGS
DIVISION OF HIGHWAYS
PLANS FOR PROPOSED
FEDERAL AID HIGHWAY**

SCALES { PLAN 1 INCH = 50 FT.
PROFILE HOR. 1 INCH = 50 FT.
PROFILE VERT. 1 INCH = 5 FT.
CROSSSECTIONS 1 INCH = 5 FT.

**SBI ROUTE 88 SECTION 101B-1
(FA ROUTE 40) PROJECT F-126(5)
WHITESIDE COUNTY**


INDEX OF SHEETS

- COVER SHEET
- INDEX OF SHEETS
- SUMMARY OF QUANTITIES
- TYPICAL SECTIONS
- GENERAL NOTES
- TYPICAL MAILBOX TURNOUTS AND PRIVATE ENTRANCE APPROACHES
- SCHEDULE FOR PIPE CULVERTS, CLASS X CONCRETE AND REINFORCEMENT BARS
- PLAN AND PROFILE
- PROFILE OF DETOUR ROAD
- STRUCTURE PLANS
- CROSS-SECTIONS STA. 04000 TO 04000
- STANDARD 1998 REINFORCED CONCRETE HEADWALLS
- STANDARD 1972-3 ROAD UNDER CONSTRUCTION SIGN
- STANDARD 211-C FLAGMAN TRAFFIC CONTROL SIGN
- STANDARD 2150-C SIGN FOR PRIMARY SYSTEM PROJECT
- STANDARD 1909-4
- STANDARDS 2119-1, 2119-2, 2119-3
- STANDARDS 1746-0, 1746-1, 1972-1
- STANDARD 2169

SUMMARY OF QUANTITIES

010001	TREE REMOVAL (8 TO 15 INCH DIAMETER)	IN. DIA.	265
010002	TREE REMOVAL (OVER 15 INCH DIAMETER)	IN. DIA.	703
010005	TREE REMOVAL, ACRES	ACRE	1.0
011001	EARTH EXCAVATION	CU. YDS.	36,646
012001	BORROW EXCAVATION	CU. YDS.	16,814
024001	SUB-BASE GRANULAR MATERIAL, TYPE A	TON	8897
029005	GRAVEL OR CRUSHED STONE BASE COURSE	TON	3538
045001	BITUMINOUS MATERIALS, (PRIME COAT)	GALLON	2500
048007	BITUMINOUS CONCRETE SURFACE COURSE SUB-CLASS 1-11	TON	726
048008	PORTLAND CEMENT CONCRETE PAVEMENT 10"	SQ. YDS.	5648.7
048011	PORTLAND CEMENT CONCRETE PAVEMENT 16"	SQ. YDS.	382
048019	PAVEMENT FABRIC	SQ. YDS.	5648.7
048023	REMOVAL OF EXISTING STRUCTURES	CU. YDS.	1
052002	CLASS B EXCAVATION FOR STRUCTURES	CU. YDS.	830
052001	HANDRAIL CONCRETE	CU. YDS.	3.1
052003	CLASS X CONCRETE	CU. YDS.	768.9
052016	CLASS X CONCRETE (HEADWALL)	CU. YDS.	43.2
052021	PROTECTIVE COAT	SQ. YDS.	6912
064001	FURNISHING AND ERECTING STRUCTURAL STEEL	POUND	2600
058006	PIPE CULVERTS, TYPE 2A, 48"	LIN. FT.	158
058009	PIPE CULVERTS, TYPE 2A, 48"	LIN. FT.	100
058031	PIPE CULVERT, TYPE B 48"	LIN. FT.	200
058088	PIPE CULVERT, TYPE 1 15"	LIN. FT.	134
058055	REMOVE AND RELAY PIPE CULVERTS 16"	LIN. FT.	28
058078	REMOVE AND RELAY PIPE CULVERTS 48"	LIN. FT.	30
059001	REINFORCEMENT BARS	POUND	108,750
060001	FURNISHING UNTREATED PILES UP TO 20 FEET	LIN. FT.	3904
060004	FURNISHING CRESSOTED PILES UP TO 20 FEET	LIN. FT.	406
060007	TEST PILE TIMBER	EACH	8
081001	NAME PLATES	EACH	1
092001	PAVEMENT REMOVAL	SQ. YDS.	3785
099002	WOOD GUARD RAIL REMOVAL	LIN. FT.	812
100001	PIPE HANDRAIL	LIN. FT.	386
101007	STOCK-PILING SALVAGE AGGREGATE	CU. YDS.	7181
101009	SALVAGED AGGREGATE	CU. YDS.	273
105001	TEMPORARY BRIDGE COMPLETE	EACH	1
104001	FURNISHING AND ERECTING RIGHT OF WAY MARKERS, EACH	EACH	6
109002	RE-ERECTING RIGHT OF WAY MARKERS	EACH	8
110001	TEMPORARY SEEDING	ACRE	4.5
110004	COMPLETE SEEDING	ACRE	4.5
110006	FERTILIZER NUTRIENTS	TON	0.7
111001	STRAW FOR ASPHALT-COATED MULCH	TON	23
111003	EMULSIFIED ASPHALT	GALLON	1985
203028	WOVEN WIRE FENCE	LIN. FT.	870
051036	PRECAST PRESTRESSED CONCRETE BRIDGE BEAMS	LIN. FT.	484
203020	CONSTRUCTION IDENTIFICATION SIGNS	EACH	2
057010	TIMBER BUFFERS COMPLETE	L. SIGN	1

BEGIN PROJECT F-126(5)
STATION 68+28

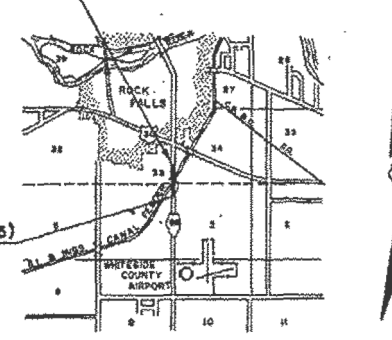

END PROJECT F-126(5)
STATION 91+32

PROJECT TOTAL LENGTH = 2304 FT. = 0.436 MI.

ROAD CLASSIFICATION
3300-T-70

STATE OF ILLINOIS
DEPARTMENT OF PUBLIC WORKS AND BUILDINGS
DIVISION OF HIGHWAYS
APPROVED: *[Signature]*
DATE: March 18, 1964
APPROVED: *[Signature]*
DATE: March 16, 1964
APPROVED: *[Signature]*
DATE: March 18, 1964
APPROVED: *[Signature]*
DATE: March 18, 1964

DEPARTMENT OF COMMERCE
BUREAU OF PUBLIC ROADS
APPROVED: _____
DIVISION ENGINEER DATE

FILE NAME = s:\p\1\6300-6395\6346\025\Micro\Struct\Structure\Plans\09280015-64C17-034-EPLANS.dgn

FOR INFORMATION ONLY