




EXISTING LEGEND:

- ① 1/2" ASPHALT SURFACE
- ② PCC PAVEMENT
- ③ VARIABLE SUBBASE GRANULAR MATERIAL
- ④ SUBGRADE
- ⑤ BITUMINOUS AGGREGATE SHOULDER
- ⑥ TYPE B-6.12 CURB AND GUTTER
- ⑦ GUARDRAIL

-  ROADWAY REMOVAL ITEM (SEE ROADWAY PLANS)
-  STRUCTURE REMOVAL ITEM (SEE STRUCTURE PLANS)

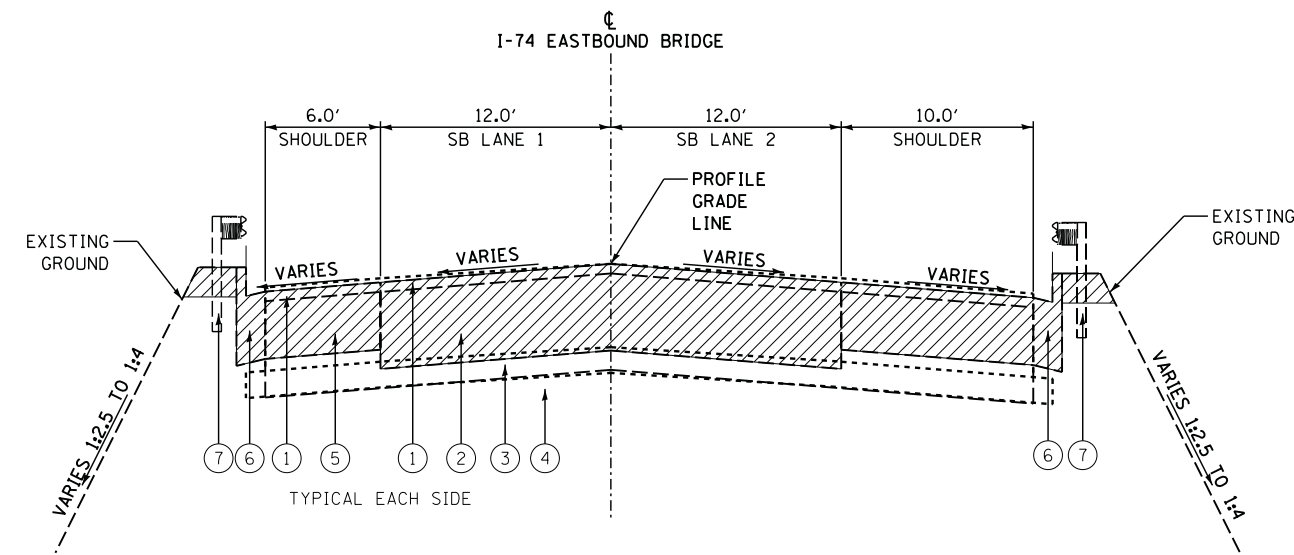

EXISTING TYPICAL SECTION


STA. 415+00.00 TO STA. 415+43.50
 STA. 416+65.00 TO STA. 417+08.96
 (BRIDGE OMISSION STA. 415+43.50 TO STA. 416+65.00)

NOTES:

1. TYPE B6.12 CURB AND GUTTER REMOVAL FROM STA. 415+26.40 LT TO STA. 415+42.82 LT FROM STA. 415+29.89 RT TO STA. 415+43.43 RT FROM STA. 416+62.16 LT TO STA. 416+77.04 LT FROM STA. 416+61.86 RT TO STA. 416+75.72 RT
2. SEE DISTRICT 4 SLOPE STEPS DETAIL FOR ADDITIONAL INFORMATION.


PROPOSED LEGEND:

- Ⓐ BRIDGE APPROACH PAVEMENT CONNECTOR (PCC)
- Ⓑ SUBBASE GRANULAR MATERIAL, TYPE B 4"
- Ⓒ STEEL PLATE BEAM GUARDRAIL, TYPE A, 9 FOOT POSTS
- Ⓓ COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
- Ⓔ FURNISHED EXCAVATION

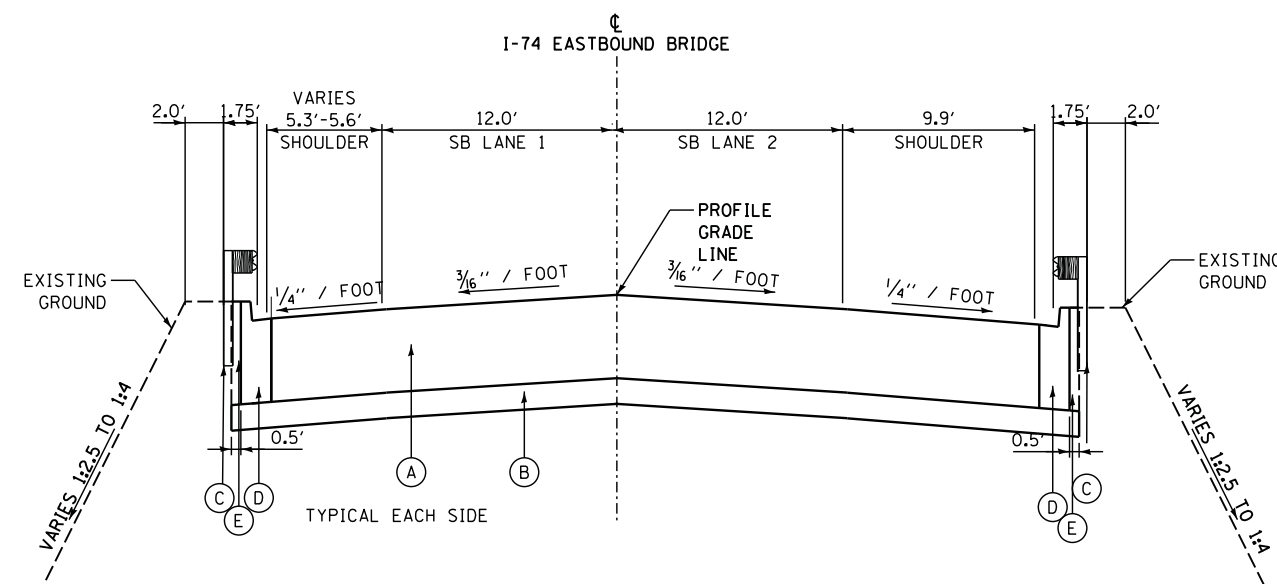

PROPOSED TYPICAL SECTION

STA. 415+00.00 TO STA. 415+21.25
 STA. 416+86.75 TO STA. 417+08.96
 (BRIDGE OMISSION STA. 415+50.25 TO STA. 416+57.75)

FILE NAME =	DESIGNED - JCP	REVISED -	 800 WEST FULTON STREET CHICAGO, ILLINOIS 60611-1259 TEL 312 454 9100 FAX 312 559 1217 WEB www.sepstein.com	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION		I-74 EASTBOUND EXISTING AND PROPOSED TYPICAL SECTION		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
... \D4-174-HendersonCreek-Combined-sht009-Ex	DRAWN - JCP	REVISED -						74	48-(25B)BR, BR-1J	KNOX	131	9
PLOT TIME = 4:38:49 PM	CHECKED - GAO	REVISED -						CONTRACT NO. 68B85				
PLOT DATE = 7/30/2014	DATE - 08/01/14	REVISED -						ILLINOIS FED. AID PROJECT				
			SCALE: N/A			SHEET NO. 1 OF 1 SHEETS			STA. N/A TO STA. N/A			