

### LEGEND



	Existing	Proposed
Right of Way	EX. ROW	
Fence		
Utility Pole		
Utility Pole with Street Light		
Guy Anchor		
Gas Main		
Overhead Electric Line	OHE	
Underground Electric Line	UGE	
Electric Pedestal	E	
Telephone Pedestal	T	
Valve Box & Valve		
Valve Vault & Valve		
Fire Hydrant with Valve Box		
Fire Hydrant		
Water Main	WM	
Water Service with Curb Stop Box		
Storm Manhole		
Storm Catch Basin		
Flared End Section		
Storm Sewer		
Sanitary Manhole		
Sanitary Sewer		
Sign		
Road Centerline		
Aggregate Driveway		
Asphalt Pavement		
Concrete Driveway		
Concrete Sidewalk		
Bush/Tree Clump		
Deciduous Tree		
Evergreen Tree		
Mailbox	M	

### SUMMARY OF QUANTITIES

CONSTRUCTION TYPE CODE: 0021



PAY CODE	ITEM	UNIT	QUANTITY
20100210	TREE REMOVAL (OVER 15 UNITS DIA.)	UNIT	24
28000500	INLET AND PIPE PROTECTION	EACH	2
35102000	AGGREGATE BASE COURSE, TYPE B, 8"	SQ YD	299
40600275	BITUMINOUS MATERIALS (PRIME COAT)	LB	996
40800050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	50.2
42400100	PORTLAND CEMENT CONCRETE SIDEWALK 4 INCH	SQ FT	6742
42400300	PORTLAND CEMENT CONCRETE SIDEWALK 6 INCH	SQ FT	1722
42400800	DETECTABLE WARNINGS	SQ FT	136
44000100	PAVEMENT REMOVAL	SQ YD	533
44000600	SIDEWALK REMOVAL	SQ FT	2598
44213200	SAW CUTS	FOOT	744
52200800	SEGMENTAL CONCRETE BLOCK WALL	SQ FT	260
60250200	CATCH BASINS TO BE ADJUSTED	EACH	1
60603600	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6 12"	FOOT	197
66900200	NON-SPECIAL WASTE DISPOSAL	CU YD	25
66900800	SPECIAL WASTE DISPOSAL	CU YD	68
66900900	HAZARDOUS WASTE DISPOSAL	CU YD	6
66900500	SOIL DISPOSAL ANALYSIS	EACH	1
66901001	REGULATED SUBSTANCES PRE-CONSTRUCTION PLAN	L SUM	1
66901003	REGULATED SUBSTANCES FINAL CONSTRUCTION REPORT	L SUM	1
66901006	REGULATED SUBSTANCES MONITORING	CAL DA	25
67100100	MOBILIZATION	L SUM	1
X7010216	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1
XX002053	LANDSCAPE RESTORATION	L SUM	1
XX006821	CONCRETE TRUCK WASHOUT	L SUM	1
Z0013798	CONSTRUCTION LAYOUT	L SUM	1
Z0048665	RAILROAD PROTECTIVE LIABILITY INSURANCE	L SUM	1

Δ SPECIALTY ITEMS

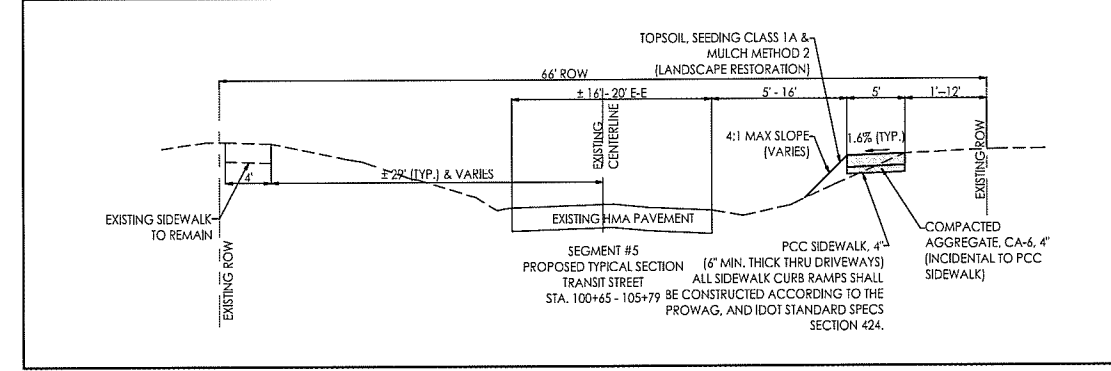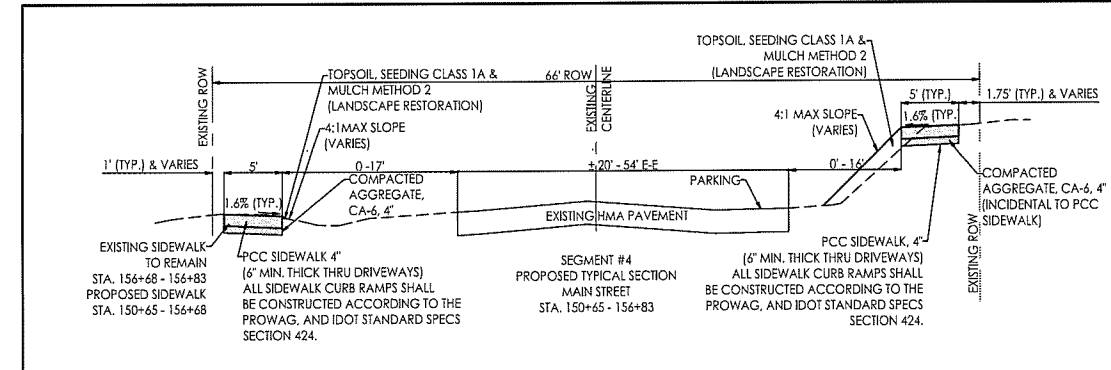

#### HMA MIXTURE REQUIREMENTS TABLE

LOCATION	CITY STREETS
MIXTURE USES	SURFACE & INCIDENTAL
PG:	PG 64-22
DESIGN AIR Voids	4.0 @ N50
MIXTURE COMPOSITION: (MIXTURE GRADATION)	IL-9.5
FRICTION AGGREGATE	C
MIXTURE WEIGHT:	112 LB/SY/IN
QUALITY MANAGEMENT PROGRAM	QC/GA
SUBLOT SIZE:	N/A
NUMBER OF ROLLER PASSES	N/A

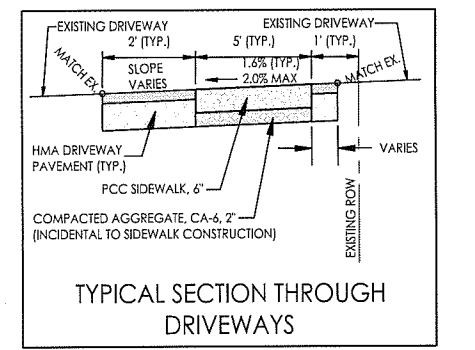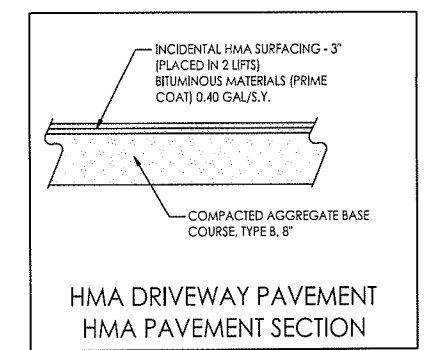

PRINTED: Monday, December 28, 2020

Date	Revision	By
3/13/19	REVISED PER IDOT (LETTER DATED 7-19-18)	JAB
5/3/19	REVISED PER IDOT (LETTER DATED 3-29-19)	JAB
9/28/20	REVISED PER REDUCED SCOPE	JAB
11/2/20	REVISED PER IDOT (E-MAIL 10-20-20)	JAB
2/23/21	ADDENDUM	JAB

Safe Routes to School  
Legend, Quantities & Typical Sections

CHECKED BY: KCB	DRAWN BY: JAB	Sheet
DATE: 7/23/2018	DATE: 7/23/2018	2 of 19
3207_BASE.dwg		