


PLAN - PROPOSED RETAINING WALL

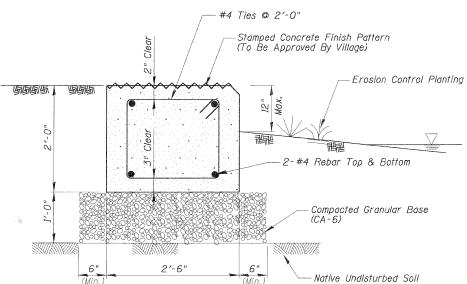

SECTION A-A

NOTES:

- 1. 3/4" Deep Tooled Control Joints At 4'-0" Spacing.
- 2. 3/4" Thick Expansion Joint At ±32'-0" Spacing.
- 3. Rebar Shall Be Discontinuous At Expansion Joints.
- 4. The contractor is responsible for design, installation and removal of all excavation support systems.
- 5. The excavation and work area shall be properly drained at all times during construction, all wet, loose, frozen or other unsuitable material shall be removed prior to placement of concrete or compacted backfill.
- 6. It shall be the responsibility of the Contractor to divert the stream flow during construction in order to keep the construction areas free of water. The method of water diversion shall be subject to the approval of the Engineer and cost shall be included with "Concrete Retaining Wall".

BILL OF MATERIAL (BRIDGE)

	ITEM	DESCRIPTION	UNIT	QUANTITY
I	*	Concrete Retaining Wall	Foot	520
ſ				

*Item Includes Furnishing And Installation Of All Concrete, Reinforcement Bars, Excavation, Compacted Subgrade, Removal And Disposal Of Unsuitable Material, A Stamped Concrete Finish, And Any Incidental Items Required For The Construction Of The Concrete Retaining Wall. See Special Provision.

LAP SPI	LICE SCHEDULE
BAR	CLASS "B"
SIZE	SPLICE
#4	1'-10"

LAKE LORIN BIKE TRAIL OVER TINLEY CREEK SECTION 06-00021-01-BT COOK COUNTY, ILLINOIS STA. 142*72.63 STRUCTURE NO. N/A

						STRUCTURE NO. N/A					
	FILE NAME =	USER NAME = MAGOLDEN	DESIGNED -	WJS	REVISED -			F.A.S	SECTION	COUNTY	TOTAL SHEET
	N:\OrlandHills\080156\Struct\080156-S4.SH	T	DRAWN -	PDR	REVISED -	STATE OF ILLINOIS	PROPOSED RETAINING WALL	RIE.	06-00021-00-BT	COOK	SHEETS NO.
		PLOT SCALE = 16'	CHECKED -	MM	REVISED -	DEPARTMENT OF TRANSPORTATION		N/A	06-00021-00-61	CONTRAC	OU 20
		PLOT DATE = 10/28/2008	DATE -		REVISED -		SHEET NO. S-6 OF S-6	FED. ROA	D DIST. NO. 1 ILLINOIS FEE	. AID PROJECT BRM	