

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
S.R.L. P.A.	11-00033- 60-SW	MOULTRIE	44	3
FED. ROAD DIST. NO. 7	CLINCH	FED. AID PROJECT:		

CONTRACT #95598

1. Pavement grades shown are at the top of pavement surfaces, unless otherwise noted in the plans.

2. Erosion control measures shall be in accordance with IDOT Specifications. Placement shall be directed by the Engineer.

3. All elevations refer to U.S.G.S. mean sea level datum.

4. Any reference to a standard in the plans shall be interpreted to mean the edition as indicated by the sub-number listed on Sheet 2.

5. Before ordering storm sewers, pipe culverts or pipe drains, the Contractor shall consult the Engineer for exact lengths.


6. CURB AND GUTTER, WALKS, SLABS, AND PCC DRIVEWAY PAVEMENT 8"

A. Concrete curb and gutter shall be in accordance with IDOT Std. Spec. Locate contraction joints at 20 ft on center, unless otherwise shown. Locate expansion joints at minimum 100 ft. on center, unless otherwise shown.

B. Concrete walks, islands, and other slabs shall be in accordance with IDOT Std. Spec. Unless otherwise shown, locate sidewalk contraction joints at 5 ft on center and expansion joints at 50 ft on center, unless otherwise shown, locate contraction joints in larger slabs at 15 ft intervals in each direction, reinforced with lubricated smooth dowel bars (3/4 in. diameter, 18 in. length, at 12 in. centers).

C. Concrete walks crossing through entrances shall be constructed in accordance with the detail shown below. Monolithically constructed sidewalks will not be allowed.

D. Dowel bars shall be used when Portland Cement Concrete Driveways are placed adjacent to any existing concrete. The dowel bars shall be 2 feet in length and shall be placed on 2 foot centers.

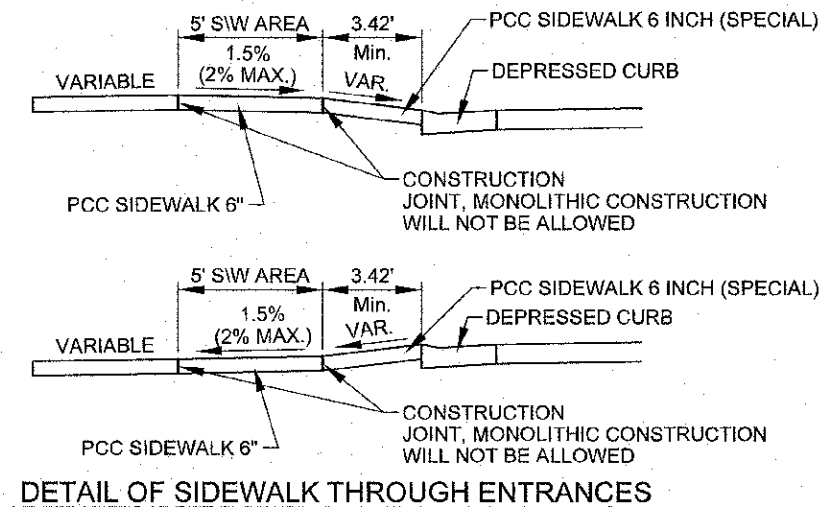

LEGEND

○	IRON PIN FOUND
○ 1/4	1/4" IRON PIN FOUND
○ IP	IRON PIPE FOUND
○ N&W	NAIL & WASHER FOUND
○ N	NAIL FOUND
○ PK	PK NAIL FOUND
○ RR	RAILROAD SPIKE FOUND
○ T	"T" FENCE POST FOUND
○ X	CHISELED "X" IN CONCRETE FOUND
○ DH	DRILLED HOLE IN CONCRETE FOUND
⊙	SURVEY DISC FOUND
⊘	STONE FOUND
⊙	TREE (DECIDUOUS)
⊙	TREE (EVERGREEN)
⊙	FIRE HYDRANT
⊙	WATER METER
— v —	WATER MAIN (EXISTING)
— w —	WATER SERVICE LINE (EXISTING)
⊙	VALVE (GAS OR WATER)
⊙	GAS METER
— g —	GAS MAIN (EXISTING)
— s —	GAS SERVICE LINE (EXISTING)
⊙	CABLE TV PEDESTAL
— CT —	UNDERGROUND CABLE TV (EXISTING)
⊙	TELEPHONE PEDESTAL
⊙	TELEPHONE MANHOLE
— T —	TELEPHONE CABLE (EXISTING)
— t —	TELEPHONE SERVICE WIRE (EXISTING)
⊙	POWER POLE
⊙	POWER POLE w/LIGHT
⊙	GUY ANCHOR
⊙	LIGHTPOLE (EXISTING)
⊙	SIDEWALK LIGHT (EXISTING)
⊙	STREET & SIDEWALK LIGHT POLE (PROPOSED)
⊙	ELECTRIC PEDESTAL
— DHE —	OVERHEAD ELECTRIC (EXISTING)
— E —	UNDERGROUND ELECTRIC (EXISTING)
— e —	UNDERGROUND ELECTRIC (PROPOSED)
LS	LANDSCAPING
⊙	FENCE POST
—	FENCE

MILANO & GRUNLICH ENGINEERS, LLC
 114 WEST WASHINGTON
 P.O. BOX 187
 EFFINGHAM, ILLINOIS 62401
 PHONE: (217) 347-2852
 (217) 347-2144
 FAX: (217) 348-3435

GENERAL NOTES
 SIDEWALK ENHANCEMENT
 CITY OF SULLIVAN

File Name: S:\17\10\101028\DWG\T180 Sld.dwg
 Plot Date: 11/05/12 at 14:35