


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	*	**	3	1
		ILLINOIS	CONTRACT NO. 78577	

* D9 CM DECK CRACK SEAL 2018-1
** FRANKLIN/JEFFERSON

D-99-028-17

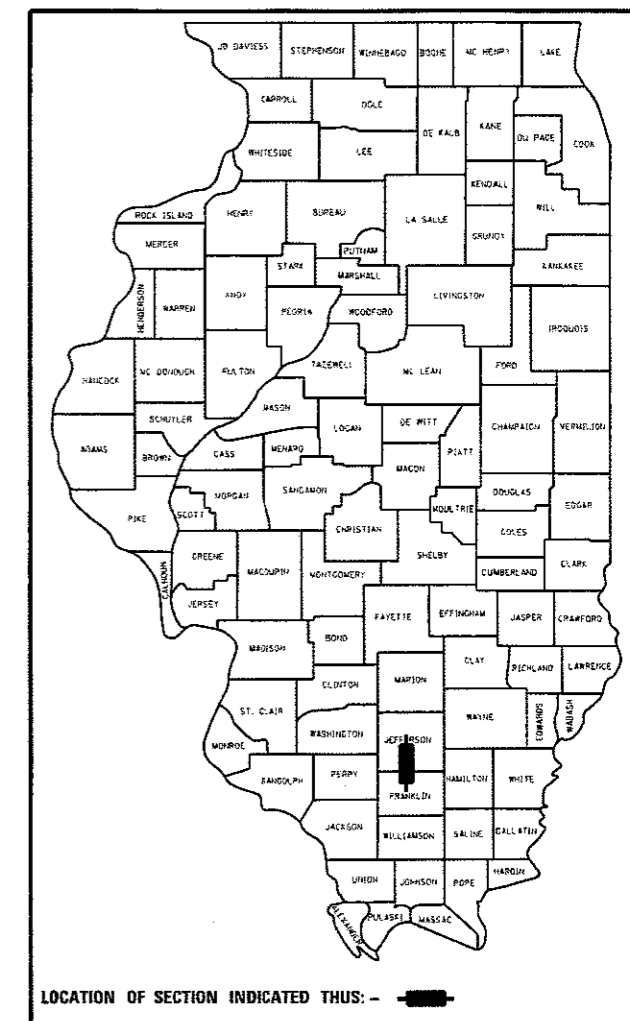

LOCATION OF SECTION INDICATED THIS: - [Black Box]

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 3
FOR STRUCTURAL PAVEMENT DESIGN INFORMATION, SEE SHEET NO. IVA

PROPOSED
HIGHWAY PLANS

FAI ROUTE 57 (I-57)
SECTION D9 CM DECK CRACK SEAL 2018-1

DECK CRACK SEAL
FRANKLIN/JEFFERSON COUNTY

C-99-028-17

I-57 TRAFFIC DATA

SN 041-0008 /0009
2016 ADT = 21,400 ONE DIRECTION
40 % TRUCKS
3 LANES TRAFFIC EACH DIRECTION
MCCLELLAN TOWNSHIP

SN 028-0079 /0080
2016 ADT = 18,700 ONE DIRECTION
40 % TRUCKS
2 LANES TRAFFIC EACH DIRECTION
DENNING TOWNSHIP


SN 028-0081/0082
2016 ADT = 18,700 ONE DIRECTION
40 % TRUCKS
2 LANES TRAFFIC EACH DIRECTION
BROWNING TOWNSHIP

DESIGN DESIGNATION : NA
COORDINATE SYSTEM : EAST ZONE
POSTED SPEED : 70 MPH

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: David Piche (618) 351-5227
PROJECT DESIGNER: David Hollmann (618) 351-5228

CONTRACT NO. 78577

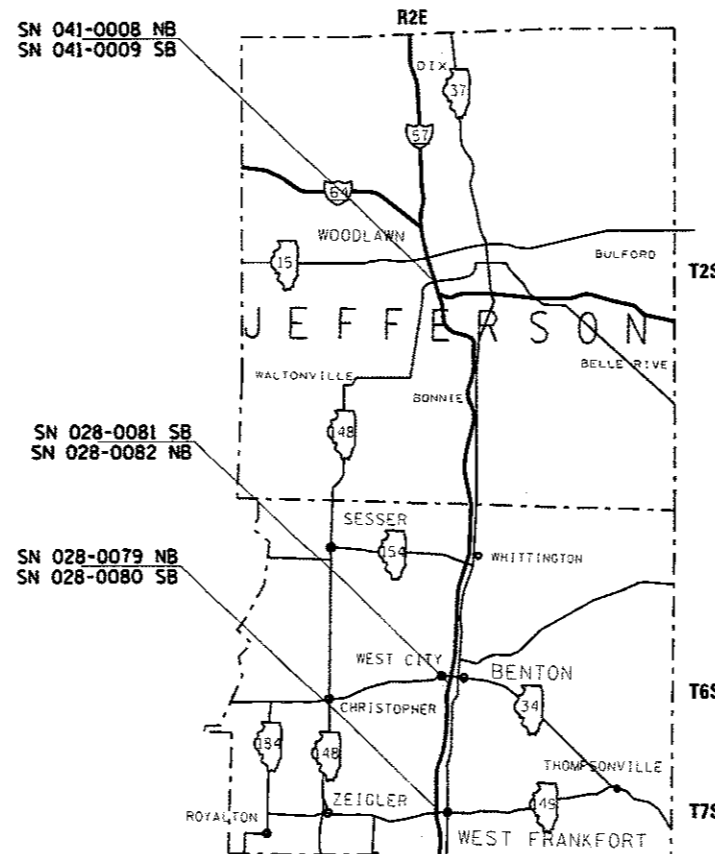

GROSS LENGTH = 1320 FT. = 0.25 MILES
NET LENGTH = 1320 FT. = 0.25 MILES

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Sept 25 2017
Jeffrey Z Keen
REGION FIVE ENGINEER

Nov 30 2017
Mawoon M. Adib P.E.
ENGINEER OF DESIGN AND ENVIRONMENT

Nov 30 2017
David Piche
DIRECTOR OF PROGRAM DEVELOPMENT

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

GENERAL NOTES

PLAN DIMENSIONS AND DETAILS RELATIVE TO THE EXISTING CONDITIONS HAVE BEEN TAKEN FROM EXISTING PLANS AND ARE SUBJECT TO NORMAL CONSTRUCTION VARIATIONS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY SUCH DIMENSIONS AND DETAILS IN THE FIELD AND MAKE NECESSARY APPROVED ADJUSTMENTS PRIOR TO CONSTRUCTION OR ORDERING OF MATERIALS. SUCH VARIATIONS SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION FOR A CHANGE IN THE SCOPE OF WORK. THE CONTRACTOR, HOWEVER, WILL BE PAID FOR THE ACTUAL QUANTITY FURNISHED AT THE UNIT PRICE FOR THE WORK. CONSTRUCTION PLANS ARE AVAILABLE FOR REVIEW AT THE DISTRICT 9 OFFICE.

INDEX OF SHEETS

- 1 COVER SHEET
- 2 GENERAL NOTES, INDEX OF SHEETS, AND STANDARDS
- 3 SUMMARY OF QUANTITIES

STANDARDS

- 000001-06 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 701400-09 APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
- 701401-11 LANE CLOSURE, FREEWAY/EXPRESSWAY
- 701411-09 LANE CLOSURE, MULTILANE-ENTRANCE OR EXIT RAMP
- 701428-01 TRAFFIC CONTROL SETUP AND REMOVAL FREEWAY/EXPRESSWAY
- 701446-09 TWO LANE CLOSURE, FREEWAY / EXPRESSWAY
- 701901-07 TRAFFIC CONTROL DEVICES

Prepared By: *[Signature]*
 DISTRICT STUDIES & PLANS ENGINEER

Examined By: *[Signature]*
 DISTRICT LAND ACQUISITION ENGINEER

Examined By: *[Signature]*
 DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By: *[Signature]*
 DISTRICT OPERATIONS ENGINEER

Examined By: *[Signature]*
 DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By: *[Signature]*
 DISTRICT CONSTRUCTION ENGINEER

Examined By: *[Signature]*
 DISTRICT MATERIALS ENGINEER

* 09 CM DECK CRACK SEAL 2018-1
 ** FRANKLIN/JEFFERSON

FILE NAME =	USER NAME = hollmandb	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, GENERAL DETAILS, AND STANDARDS	F.A.J. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
pc:\BL084EBID\7EG\illinois.gov\WIDOT\Documents\DOT Offices\District 9\Projects\7857\Drawn to CAD\Drawings\78577_sht.dgn	DRAWN to CAD\Drawings\78577_sht.dgn	REVISOR -	REVISIONS -			57	.	..	3	2	
Default	PLOT SCALE = 100.0000 / in.	CHECKED -	REVISOR -			CONTRACT NO. 78577					
	PLOT DATE = 8/21/2017	DATE -	REVISIONS -			ILLINOIS FED. AID PROJECT					

SUMMARY OF QUANTITIES

S.N.:	028-0079	028-0080	028-0081	028-0082	041-0008	041-0009
CODE:	0005	0005	0005	0005	0005	0005
COUNTY:	FRANKLIN	FRANKLIN	FRANKLIN	FRANKLIN	JEFFERSON	JEFFERSON
ROUTE:	FAI 57	FAI 57	FAI 57	FAI 57	FAI 57	FAI 57
FUNDING:	100% STATE	100% STATE	100% STATE	100% STATE	100% STATE	100% STATE

CODE NUMBER	ITEM DESCRIPTION	UNIT	TOTAL QUANTITY	QUANTITY	QUANTITY	QUANTITY	QUANTITY	QUANTITY	QUANTITY
67100100	MOBILIZATION	LSUM	1	0.166	0.166	0.167	0.167	0.167	0.167
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	3	1		1			1
70100800	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401	LSUM	1	0.166	0.166	0.167	0.167	0.167	0.167
70100815	TRAFFIC CONTROL AND PROTECTION, STANDARD 701446	LSUM	1					0.5	0.5
70200100	NIGHTTIME WORK ZONE LIGHTING	LSUM	1	0.166	0.166	0.167	0.167	0.167	0.167
X0325747	BRIDGE DECK CONCRETE CRACK SEALER	FOOT	10800	2200	1475	2700	2375	775	1275
X7015005	CHANGEABLE MESSAGE SIGN	CAL DAY	84	14	14	14	14	14	14

FRANKLIN AND JEFFERSON COUNTY					DECK AREA	DIMENSIONS		APPROACH SLAB		CRACK SEALER
	STRUCTURE NUMBER	ROUTE	FEATURED CROSSED	NUMBER OF LANES	SQ FT	LENGTH FT	WIDTH FT	LENGTH FT	SQ FT	LINEAR FT
1	041-0008	I-57 NB	IL 148 & UP RR	2	14449.9	255.75	56.5	30	1695	775
2	041-0009	I-57 SB	IL 148 & UP RR	2	14449.9	255.75	56.5	30	1695	1275
3	028-0079	I-57 NB	7TH STREET	2	10977.8	184.5	59.5	30	1785	2200
4	028-0080	I-57 SB	7TH STREET	2	10977.8	184.5	59.5	30	1785	1475
5	028-0081	I-57 SB	MP RR	3	13094.1	219.75	59.5	30	1785	2700
6	028-0082	I-57 NB	MP RR	3	13094.1	219.75	59.5	30	1785	2375
TOTAL									10800	

• D9 CM DECK CRACK SEAL 2018-1
•• FRANKLIN/JEFFERSON