

**WEST EDGE OF SHOULDER**

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
S. END OF SOUTH APPROACH PAVEMENT	16+33.91	-20.00	720.47
A1	16+43.91	-20.00	720.70
A2	16+53.91	-20.00	720.91
N. END OF SOUTH APPROACH PAVEMENT	16+63.91	-20.00	721.12

**WEST EDGE OF PAVEMENT**

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
S. END OF SOUTH APPROACH PAVEMENT	16+38.57	-12.00	720.75
A1	16+48.57	-12.00	720.97
A2	16+58.57	-12.00	721.18
N. END OF SOUTH APPROACH PAVEMENT	16+68.57	-12.00	721.38

**☉ CENTRAL AVE. & P.G.**


LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
S. END OF SOUTH APPROACH PAVEMENT	16+45.56	0.00	721.09
A1	16+55.56	0.00	721.30
A2	16+65.56	0.00	721.50
N. END OF SOUTH APPROACH PAVEMENT	16+75.56	0.00	721.69

**EAST EDGE OF PAVEMENT**

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
S. END OF SOUTH APPROACH PAVEMENT	16+52.55	12.00	721.05
A1	16+62.55	12.00	721.26
A2	16+72.55	12.00	721.45
N. END OF SOUTH APPROACH PAVEMENT	16+82.55	12.00	721.63

**EAST EDGE OF SHOULDER**

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
S. END OF SOUTH APPROACH PAVEMENT	16+57.21	20.00	720.98
A1	16+67.21	20.00	721.18
A2	16.77.21	20.00	721.37
N. END OF SOUTH APPROACH PAVEMENT	16+87.21	20.00	721.55

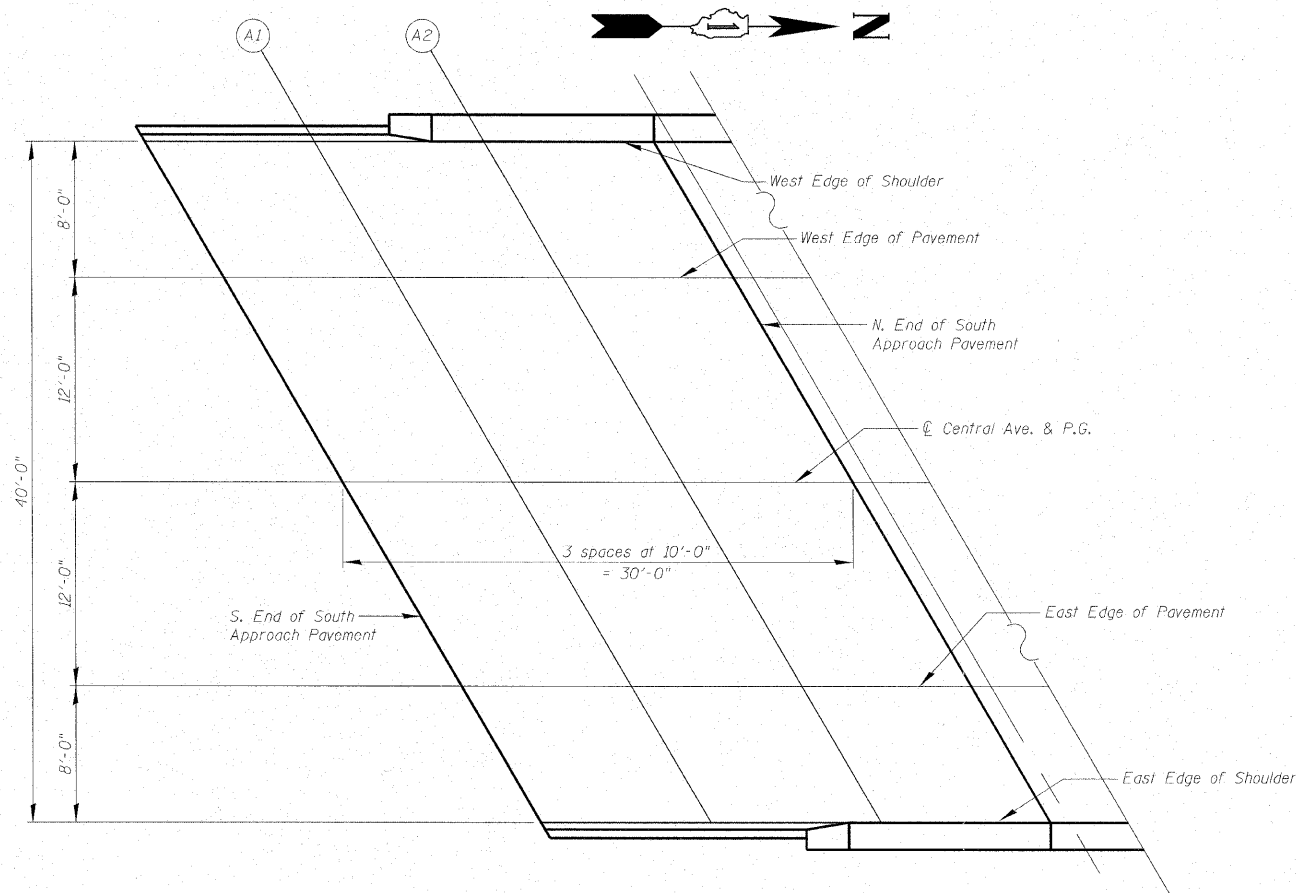

**PLAN**  
South Approach

FILE NAME = I:\102509\_Central\_Ave\_Structural\CADD\_Sheets\1600\17-07-south-approach-slab.elev.dgn

**CR** CHRISTIAN-ROGE & ASSOCIATES, INC.

USER NAME = IDDT	DESIGNED - J.C.N./B.N.S.	REVISED -
PLLOT SCALE = 50.000000' / IN.	CHECKED - B.N.S.	REVISED -
PLLOT DATE = 11/17/2011	DRAWN - F.M.	REVISED -
	DATE - NOVEMBER 17, 2011	REVISED -

DESIGNED - J.C.N./B.N.S.	REVISED -
CHECKED - B.N.S.	REVISED -
DRAWN - F.M.	REVISED -
DATE - NOVEMBER 17, 2011	REVISED -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

**TOP OF SOUTH APPROACH SLAB ELEVATIONS**  
**STRUCTURE NO. 016-2458**

SHEET NO. 57 OF 524 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	1415-803HB-R	COOK	51	22
				CONTRACT NO. 60P17
ILLINOIS FED. AID PROJECT				