




**PLAN**  
(For skews  $\leq 30^\circ$ )

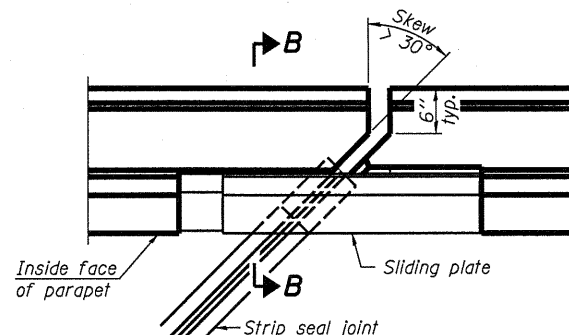


**PLAN**  
(For skews  $> 30^\circ$ )  
Showing point block

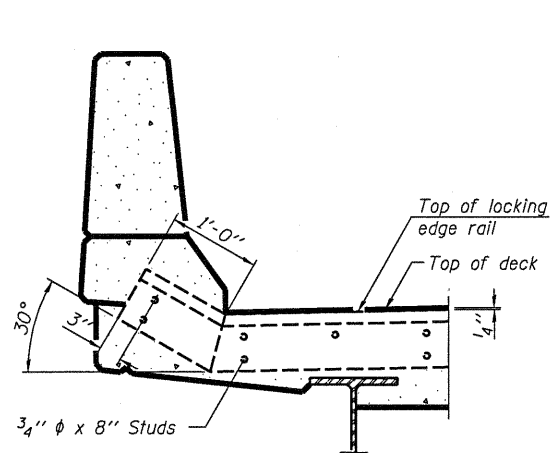


**SECTION A-A**

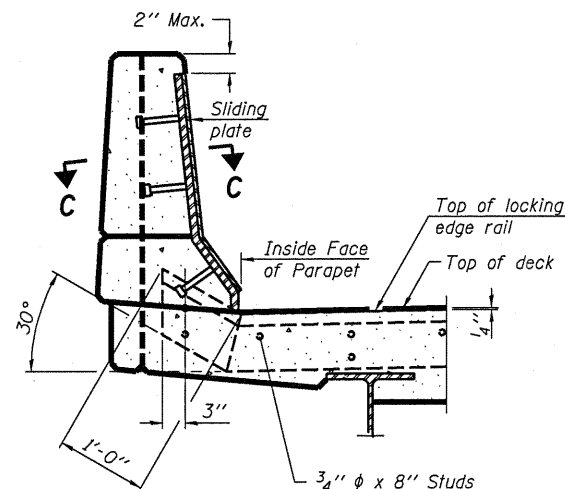


**SECTION B-B**

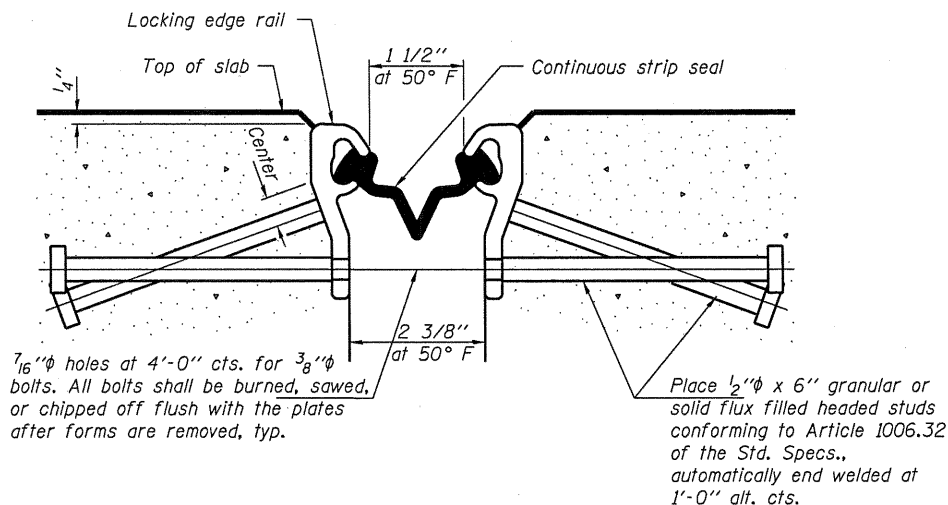

**SECTION THRU STRIP SEAL JOINT**

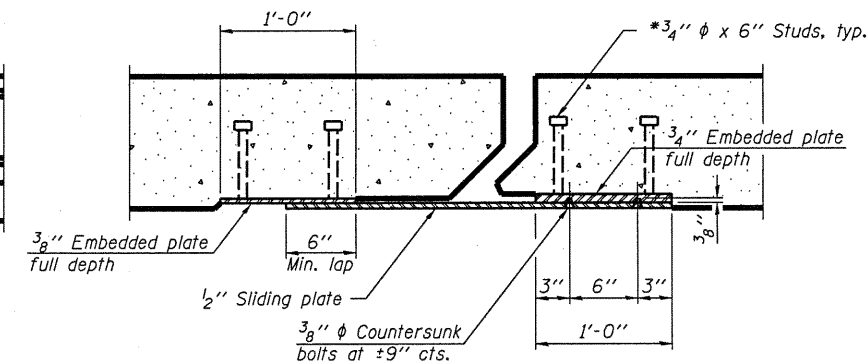


**SECTION C-C**

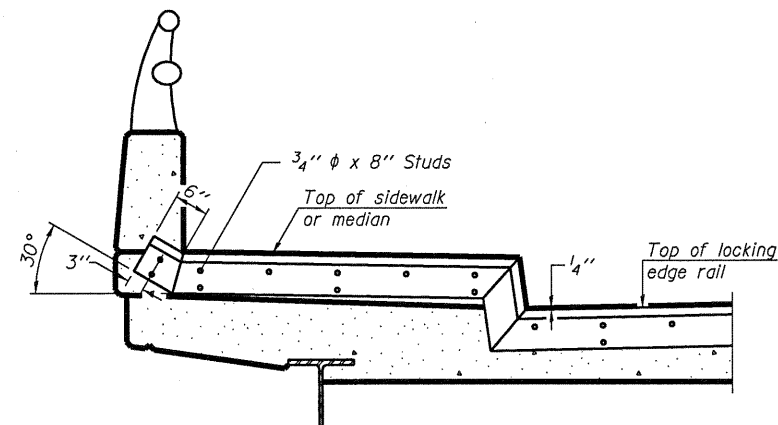

**TYPICAL END TREATMENT  
AT SIDEWALK OR MEDIAN**

Shorter plates with a single row of studs at 12" cts. may be necessary on medians which are shallower than 9". See manufacturer's recommendation.

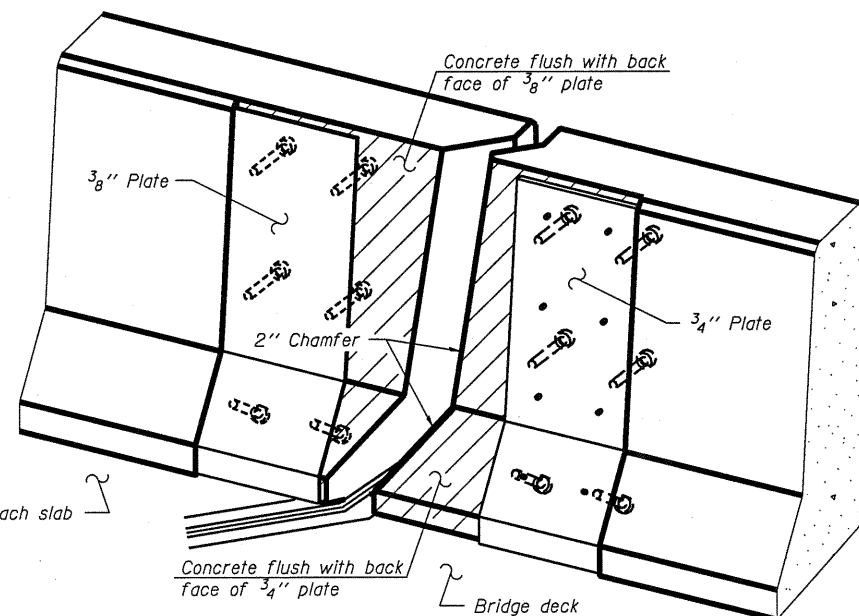


**TRIMETRIC VIEW**  
(Showing back plates only)



**LOCKING EDGE RAIL**

\* Omit weld at seal opening.



**LOCKING EDGE RAIL SPLICE**

**Notes:**

The strip seal shall be made continuous and shall have a minimum thickness of  $\frac{1}{4}$ ". The configuration of the strip seal shall match the configuration of the Locking Edge Rails. Open or "webbed" strip seal gland configurations are not permitted. The gland shall be sized for a maximum rated movement of 4 inches.

The Locking Edge Rails depicted are conceptual only, except for the minimum dimensions shown. The actual configuration of the Locking Edge Rails and matching strip seal may vary from manufacturer to manufacturer. Flanged edge rails will not be allowed. Locking Edge Rails may be spliced at slope discontinuities.

The manufacturer's recommended installation methods shall be followed.

The joint opening and deck dimensions detailed on the superstructure are based on a rolled rail expansion joint. If the Contractor elects to use the welded rail expansion joint, the opening and deck dimensions shall be modified according to the dimensions detailed on this sheet. Required modifications shall be made at no additional cost to the State.

All steel components shall be galvanized after fabrication according to Article 520.03 of the Standard Specifications.

Maximum space between rail segments at stage lines shall be  $\frac{3}{16}$ ", sealed with a suitable sealant.

Parapet plates and anchorage studs for skews  $> 30^\circ$  included in the cost of Preformed Joint Strip Seal.

**BILL OF MATERIAL**

Item	Unit	Total
Preformed Joint Strip Seal	Foot	83.5

**PREFORMED JOINT STRIP SEAL  
STRUCTURE NO. 041-0061**

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 CM BRIDGE REPAIR 2011-1	JEFFERSON	15	10
CONTRACT NO. 78212				
FED. ROAD DIST. NO. - ILLINOIS FED. AID PROJECT				