

208 East Main Street, Suite 100  
 Ballville, Illinois 62220  
 618.233.5877 phone  
 618.233.5977 fax  
 www.kaskasia.com

LICENSE NO.  
 184.004773  
 20-50805896

**Kaskasia**  
 Engineering Group, LLC

PROFESSIONAL REGISTRATIONS  
 Illinois Professional Design Firm  
 Professional Engineering Group

**BRIC**  
 PARTNERSHIP, LLC  
 CONSULTING ENGINEERS


100 EAST WASHINGTON, SUITE 220  
 BALLVILLE, ILL. 62220  
 TEL: 618.277.6220  
 FAX: 618.277.3227

SHEET TITLE: **STREETSCAPE LIGHTING PLAN**

PROJECT TITLE: **SEC 10-00085-01-LS  
 NORTH MAIN STREET STREETSCAPE  
 CITY OF EDWARDSVILLE, ILLINOIS**

DESIGNED BY:	JEN	CHECKED BY:	JEN
DRAWN BY:	JEN	DATE OF PRE-FINAL:	8/17/12
CHECKED BY:	RJD	DATE OF FINAL:	10/12/12
SHEET NO. 11 OF 18 SHEETS		PROJECT NUMBER: 09-1024.01	

- PLAN NOTES**
1. LIGHT POLE FOUNDATIONS SHALL BE INSTALLED PLUMB AND FLUSH WITH THE PROPOSED GRADE AND SHALL MEET THE HEIGHT REQUIREMENTS OF ARTICLE 836.03 OF THE STANDARD SPECIFICATIONS. WASHERS USED TO INSTALL THE POLE SHALL BE LARGE ENOUGH TO FULLY COVER THE SLOTTED HOLES IN THE POLE BASE PLATE.
  2. CONTRACTOR SHALL INSTALL LIGHT POLES AT THE LOCATIONS INDICATED ON THE PLANS, MAINTAINING ADEQUATE CLEARANCE FROM UTILITY LINES. CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY CLEARANCES PER THE NATIONAL ELECTRICAL SAFETY CODE AND/OR THE REQUIREMENTS OF THE UTILITY COMPANIES. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF ALL CONFLICTS BETWEEN PROPOSED LIGHTING POLE LOCATIONS AND UTILITY LINES. THE LOCATION OF BURIED AND ABOVE GROUND UTILITIES SHOWN ARE APPROXIMATE AND ARE SHOWN FOR INFORMATION ONLY. REROUTING, DISCONNECTION, RELOCATION, PROTECTION ETC. OF ANY UTILITIES MUST BE COORDINATED BETWEEN THE CONTRACTOR, UTILITY COMPANY AND OWNER. THE CONTRACTOR SHALL VERIFY THE EXACT LOCATION OF ALL UNDERGROUND UTILITIES PRIOR TO CONSTRUCTION.
  3. THE CONTRACTOR IS RESPONSIBLE FOR UNCOVERING OR HAND DIGGING AROUND UTILITIES AS NECESSARY. THE COST OF THIS WORK IS TO BE INCLUDED WITH THE APPLICABLE UNDERGROUND PAY ITEM.
  4. NO LIGHTING CIRCUIT OR PORTION THEREOF SHALL BE REMOVED FROM NIGHTTIME OPERATION WITHOUT THE APPROVAL OF THE ENGINEER.
  5. ALL NEW CONDUIT INDICATED TO BE INSTALLED BENEATH ROADWAYS AND DRIVEWAY ACCESS SHALL BE SCHEDULE B0 PVC. THE COST SHALL BE INCLUDED IN THE UNDERGROUND RACEWAY PAY ITEM.

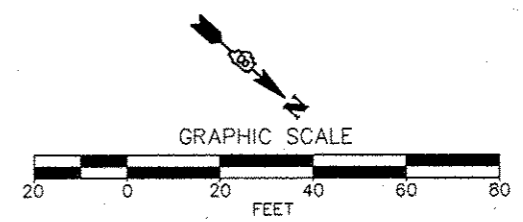

NOTE:  
 CONTRACTOR SHALL FIELD VERIFY/POT HOLE ALL UNDERGROUND UTILITIES PRIOR TO EXCAVATION FOR POLE FOUNDATIONS.

FILE: H:\2084-08\CON\DWG\TOP E Sheet\_Redisno 1-9-13 REV 2-14-13 FINAL.dwg