

03-09-2018 LETTING ITEM 069

FOR INDEX OF SHEETS & STATE STANDARDS
SEE SHEET NO. 2


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PROPOSED HIGHWAY PLANS

VARIOUS ROUTES
SECTION D2 RTR 2018
VARIOUS COUNTIES
C-92-008-18

PROJECT ENGINEER: SCOTT KULLERSTRAND

SQUAD LEADER: LANCE NICKLAUS 815-284-5407

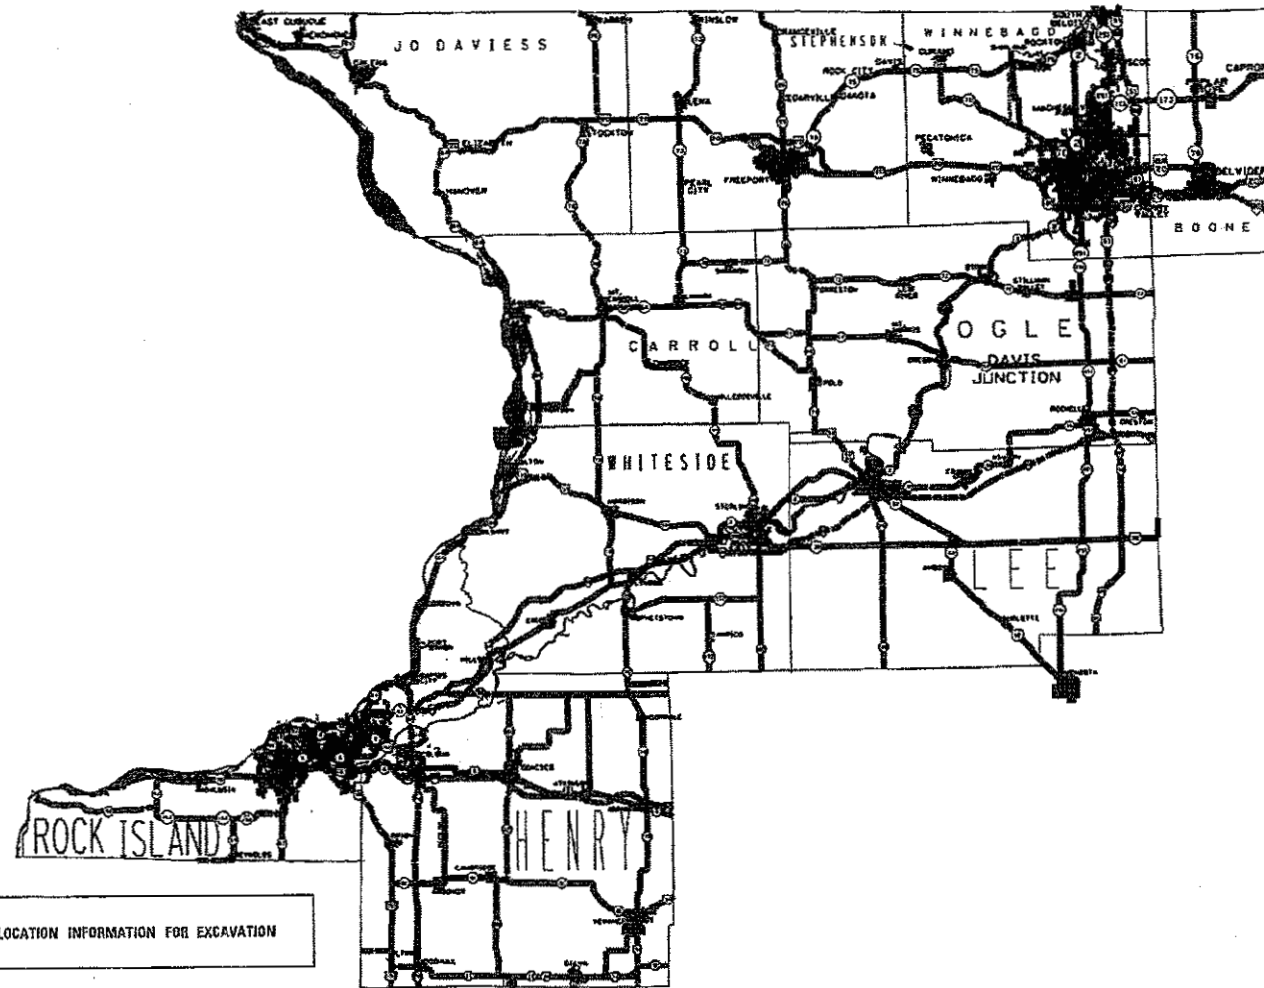

JULIE
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

CONTRACT NO. 64M56

VARIOUS ROUTES SECTION D2 RTR 2018 VARIOUS COUNTIES

F.A. RYE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 RTR 2018	VARIOUS	4	1

CONTRACT NO. 64M56
D-92-001-18



LOCATION OF SECTION INDICATED THUS: -



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Dec 07, 2017
Kevin T. Tardif
 REGIONAL ENGINEER

Feb 2, 2018
Scott A. Etkin
 ENGINEER OF DESIGN AND ENVIRONMENT

Feb 3, 2018
Paul P. [Signature]
 DIRECTOR OF PROGRAM DEVELOPMENT 2

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX

- 1 Cover Sheet
- 2 Index of Sheets / State Standards
- 3 Summary of Quantities
- 4 General Notes

Various Routes
SECTION D2 RTR 2018
Various Counties
CONTRACT NO. 64M56
Sheet 2 of 4

STATE STANDARDS

701006-05	OFF-ROAD OPERATIONS, 2L, 2W, 15'(4.5M) TO 24"(600M) FROM PAVEMENT EDGE
701101-05	OFF-ROAD OPERATIONS, MULTILANE, 15' (4.5M) TO 24" (600MM) FROM PAVEMENT EDGE
701301-04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701311-03	LANE CLOSURE, 2L, 2W, MOVING OPERATIONS, DAY ONLY
701426-09	LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATION, FOR SPEEDS > 45 MPH
701901-07	TRAFFIC CONTROL DEVICES
720011-01	METAL POST FOR SIGNS, MARKERS AND DELINEATORS
728001-01	TELESCOPING STEEL SIGN SUPPORT
729001-01	APPLICATIONS OF TYPES A AND B METAL POST (FOR SIGNS & MARKERS)

SUMMARY OF QUANTITIES

VARIOUS ROUTES
SECTION D2 RTR 2018
VARIOUS COUNTIES
CONTRACT # 64M56
SHEET 3 OF 4

100% State
0031

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	MCHD FUND	CONTRACT MAINT
67100100	MOBILIZATION	L SUM	1	0.67	0.33
K1005421	SEEDING (SPECIAL)	ACRE	4	2.5	1.5

2

Various Routes
D2 RTR 2018
Various Counties
Contract 64M56
Sheet 4 of 4

GENERAL NOTES

The purpose of this contract is to repair motorist caused turf damage at various locations throughout the counties of District 2, including Boone, Carroll, Henry, JoDaviess, Lee, Ogle, Rock Island, Stephenson, Whiteside, Winnebago and in portions of Bureau and LaSalle Counties. These individual repair locations may vary in size from approximately 40 to 1,000 square yards. All the labor, equipment, and materials required to make these turf repairs will be paid for at the contract unit price per ACRE for SEEDING (SPECIAL).

The final top 4 inches of soil in any right-of-way area disturbed by the Contractor must be a cohesive soil capable of supporting vegetation.

The Contractor shall be responsible for protecting utility property during construction operations as outlined in Article 107.31 of the Standard Specifications. A minimum of 48 hours advanced notice is required for non-emergency work. The JULIE number is 800-892-0123.

All Traffic Control required for the roadside restoration shall be considered included in the contract unit price per ACRE for SEEDING (SPECIAL).