

## TOTAL BILL OF MATERIALS

SN 015-0025

ITEM DESCRIPTION	UNIT	QUANTITY
Concrete Removal	Cu. Yd.	6.9
Concrete Superstructure	Cu. Yd.	6.9
Reinforcement Bars, Epoxy Coated	Pound	1520
Hot-Mix Asphalt Removal (Deck)	Sq. Yd.	142
Hot-Mix Asphalt Surface Course, Mix "C", N90	Ton	35.0
Deck Slab Repair (Partial Depth)	Sq. Yd.	16
Deck Slab Repair (Full Depth Type I)	Sq. Yd.	8
Deck Slab Repair (Full Depth Type II)	Sq. Yd.	6
Waterproofing Membrane System	Sq. Yd.	142

### GENERAL NOTES



Reinforcement bars shall conform to the requirements of ASTM A 706 Grade 60. See Special Provisions.

Reinforcement bars designated (E) shall be epoxy coated.

Plan dimensions and details relative to existing plans are subject to routine variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensations for a change in scope of the work; however, the Contractor will be paid for the quantity actually furnished based upon the unit price bid for the work.

Existing reinforcement bars extending into the removal area shall be cleaned, straightened and incorporated into the new construction. Any reinforcement bars that are damaged during concrete removal operations shall be repaired or replaced using an approved bar splicer or anchorage system. Cost included in concrete removal.

Areas of deck repairs shown are estimated. The Engineer shall show actual locations of deck repairs on as-built plans.

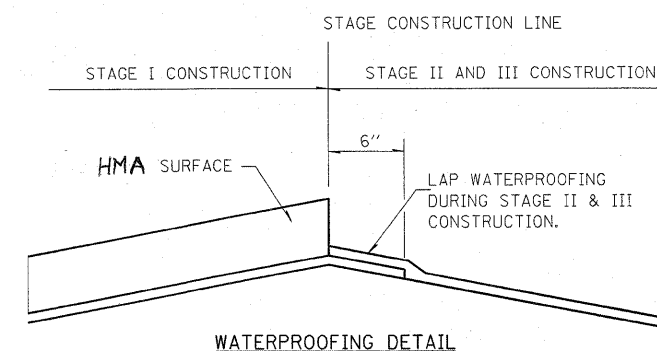

*Expires 11/30/2010*

FILE NAME =	USER NAME = steffennk	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>BRIDGE GENERAL NOTES &amp; BILL OF MATERIALS SN. 015-0025</b>	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
es:\pwork\PWIDOT\STEFFENMK\d0126049\planpropbr_74157.dgn	PLAN PROP BR - 74157.dgn	DRAWN -	REVISED -			824	(16-2,19X-2)RS-1,19B,19BR	Coles	49	41	
	PLOT SCALE = 20,0000 1/ IN.	CHECKED -	REVISED -			SCALE: N/A		FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT		
	PLOT DATE = 2/9/2009	DATE -	REVISED -			SHEET NO. 1 OF 6 SHEETS		STA.		TO STA.	
CONTRACT NO. 74157											

SHEET NO. 1  
6 SHEETS