


NOT PLOTTED TO SCALE

MAILBOX TURNOUT DETAIL (PLACED DURING MAINLINE PAVING) (NTS)

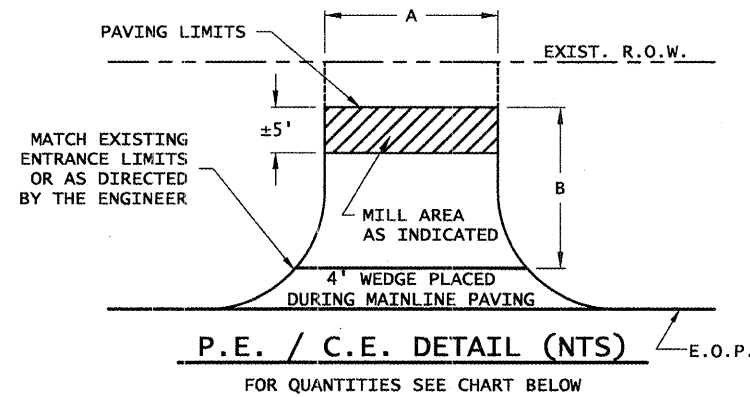

P.E. / C.E. DETAIL (NTS)

FOR QUANTITIES SEE CHART BELOW

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
342	03-00208-02-RS	LIVINGSTON	5	4

PROJECT NO. RS-0342(107)

SCHEDULE OF PAINT PAVEMENT MARK 4"				
LOCATION		NO PASSING ZONE		SKIP DASH
STATION TO STATION		NBL	SBL	⌘
<i>BEGIN CH 3</i>				
0+00	to 192+92			4,818
192+92	to 203+67	1,075		269
203+67	to 241+23	3,277	3,277	
241+23	to 252+46		1,123	281
252+46	to 275+12			567
275+12	to 286+41	1,151		288
286+41	to 291+29	488	488	
291+29	to 299+37		808	202
299+37	to 301+91	254	254	
301+91	to 309+78	787		197
309+78	to 318+23	845	845	
318+23	to 328+31		1,008	252
328+31	to 331+35			76
331+35	to 343+56	1,041		260
343+56	to 344+99	143	143	
344+99	to 354+82		983	246
354+82	to 364+24			236
364+24	to 371+81	757		189
371+81	to 374+81			75
374+81	to 385+80		1,099	275
385+80	to 398+19			310
398+19	to 407+51	932		233
407+51	to 410+52			75
410+52	to 418+24		772	193
418+24	to 425+79			189
425+79	to 433+95	816		204
433+95	to 437+37			86
437+37	to 445+08		771	193
445+08	to 462+24			429
462+24	to 469+04	680		170
469+04	to 472+83			95
472+83	to 480+13		730	183
480+13	to 493+00			322
<i>END CH 3</i>				
TOTALS		12,246	12,301	10,913
TOTAL PAY QUANTITY		35,460 FOOT		

CHATSWORTH RD./CH 3 - ENTRANCE QUANTITIES											
TYPE	STATION	A(Ft.)	B(Ft.)	AREA (S.Y.)	MILLING (S.Y.)	BIT. MAT. PRIME(MC-30)	BIT. MAT. PRIME(RC-70)	LEVEL BINDER	SURFACE COURSE	INCID. BIT.	
PE	13+81(R)	22	15	37		13		1	1	7	
PE	31+52(L)	12	15	20		7		1	1	4	
PE	64+54(L)	20	15	33		12		1	1	6	
PE	117+95(R)	14	15	23		8		1	1	4	
PE	161+23(R)	18	15	30		11		1	1	6	
PE	223+45(R)	15	15	25		9		1	1	5	
PE	244+83(L)	14	15	23		8		1	1	4	
PE	275+11(L)	11	15	18		6		1	1	4	
PE	294+42(L)	16	15	27		9		1	1	5	
PE	320+43(R)	16	15	27		9		1	1	5	
PE	372+58(L)	11	15	18		6		1	1	4	
PE	405+10(R)	14	15	23		8		1	1	4	
PE	410+07(L)	14	15	23		8		1	1	4	
PE	434+61(R)	19	15	32		11		1	1	6	
PE	435+25(L)	12	15	20		7		1	1	4	
CE	483+38(R)	23	15	38	13		2	2	1	7	
CE	488+88(R)	74	15	123	41		6	4	1	21	
TOTALS						54	132	8	21	17	100