

10A

JA035
TOTAL SHEETS = 7

CONSTRUCTION PLANS FOR JACKSONVILLE MUNICIPAL AIRPORT


JACKSONVILLE, MORGAN COUNTY, ILLINOIS

REHABILITATE T-HANGAR ACCESS PAVEMENT – PHASE 2; REHABILITATE AUTO PARKING LOT

ILLINOIS PROJECT NO. IJX-3866
AIP PROJECT NO. 3-17-0054-B13
MARCH 20, 2009

SUMMARY OF QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	AS BID QUANTITY	AS BUILT QUANTITY
AR152410	UNCLASSIFIED EXCAVATION	CU. YD.	20	
AR201660	BITUMINOUS CRACK REPAIR	LIN. FT.	2,000	
AR209510	CRUSHED AGGREGATE BASE COURSE	TON	452	
AR209650	AGGREGATE BASE PREPARATION	SQ. YD.	5,048	
AR401610	BITUMINOUS SURFACE COURSE	TON	1,658	
AR401650	BITUMINOUS PAVEMENT MILLING	SQ. YD.	4,998	
AR401655	BUTT JOINT CONSTRUCTION	SQ. YD.	44	
AR401901	REMOVE BITUMINOUS SURFACE COURSE	SQ. YD.	5,391	
AR602510	BITUMINOUS PRIME COAT	GAL.	1,790	
AR603510	BITUMINOUS TACK COAT	GAL.	360	
AR620520	PAVEMENT MARKING – WATERBOURNE	SQ. FT.	1,102	
AR701512	12" RCP, CLASS IV	LIN. FT.	186	
AR751411	INLET – TYPE A	EACH	3	
AR901510	SEEDING	ACRE	0.1	
AR908510	MULCHING	ACRE	0.1	
AR910230	HANDICAP SIGN	EACH	3	

INDEX OF SHEETS	
NO.	DESCRIPTION
1	COVER SHEET
2	IMPROVEMENT AND SAFETY PLAN
3	TYPICAL SECTIONS AND STORM SEWER DETAILS
4	STORM SEWER LAYOUT AND HANGAR PAVEMENT MILLING
5	T-HANGAR PAVEMENT ELEVATIONS AND GRADING LAYOUT
6	PARKING LOT PLAN LAYOUT AND PAVEMENT MARKING
7	STANDARD DRAWINGS

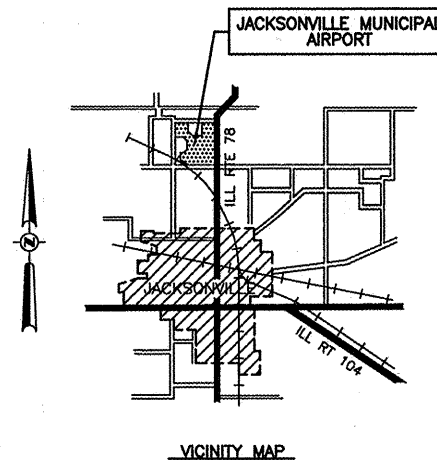

	PLANS PREPARED BY : HUTCHISON ENGINEERING, INC. JACKSONVILLE, ILLINOIS	JACKSONVILLE AIRPORT AUTHORITY
	SUBMITTED <i>[Signature]</i> DATE <i>March 10, 2009</i>	APPROVED <i>[Signature]</i> CHAIRMAN DATE <i>03-10-2009</i>