

LEGEND	
①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE
②	PAVEMENT MARKING - LINE 4" - WHITE
③	PAVEMENT MARKING - LINE 4" - YELLOW
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C
⑥	PAVEMENT MARKING - LINE 6" - WHITE
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE
⑩	PAVEMENT MARKING - LINE 12" YELLOW
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE
P	TEMPORARY PAVEMENT MARKING - PAINT
I	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE
[Hatched Box]	COMPLETED PAVEMENT
[Diagonal Lines]	WORK AREA
[Cross-hatched Box]	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
[Dotted Box]	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
[Vertical Lines]	IMPACT ATTENUATOR
[Barricade Symbol]	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
[Double Panel Symbol]	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
[Arrow Symbol]	PROPOSED SIGN POST
[Drum Symbol]	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADI)
[Barrier Symbol]	TEMPORARY CONCRETE BARRIER
[Arrow Symbol]	TRAFFIC DIRECTION ARROW
[Barricade Symbol]	DIRECTION INDICATOR BARRICADE @ 50' C-C
[Arrow Symbol]	ARROW BOARD



MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEETS: ...
 CONTRACT NO. 62K33

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
	DRAWN - ML	3	REVISED -
	CHECKED - MM		REVISED -
	DATE - 01/21/2026		REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - PRE-STAGE	
SCALE:	SHEET 18 OF 73 SHEETS STA. 39+00 TO STA. 51+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	101
CONTRACT NO. 62K33				

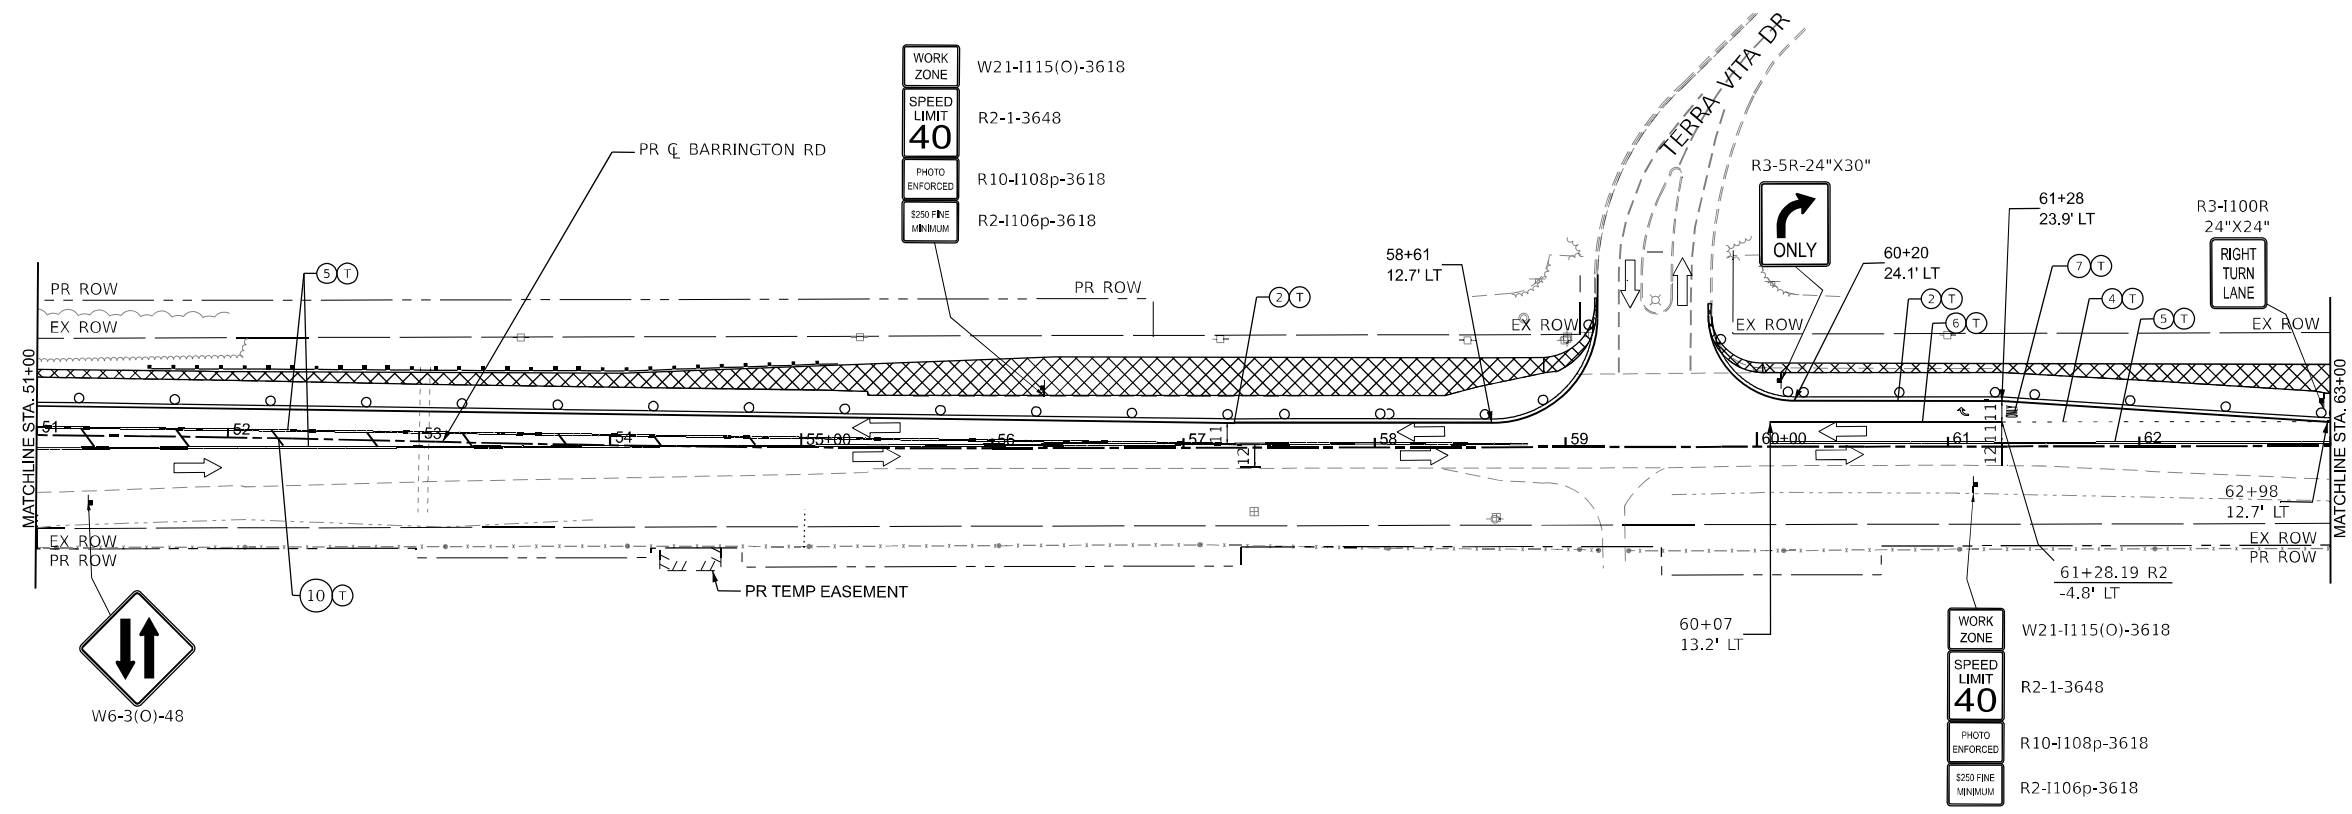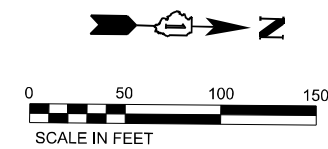

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	DIRECTION INDICATOR BARRICADE @ 50' C-C
I TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	ARROW BOARD

MODEL: Default
 FILE NAME: I:\projects\2020\CH46140120001\80CAD\02 - Sheets\16-MOT\PreStage_MOT_Sheet5.DWG
 PROJECT: 2020CH46140120001\80CAD\02 - Sheets\16-MOT\PreStage_MOT_Sheet5.DWG



OSEH inc. <small>1901 W. VAN BUREN ST. SUITE 202 CHICAGO, IL 60627 WWW.OSEHINC.COM</small>	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	PLOT SCALE = 100.418 * / in.	DRAWN - ML	REVISED - _____
	PLOT DATE = 1/20/2026	CHECKED - MM	REVISED - _____
		DATE - 01/21/2026	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC BARRINGTON RD - PRE-STAGE			
SCALE:	SHEET 19 OF 73 SHEETS	STA. 51+00	TO STA. 63+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 102
ILLINOIS FED. AID PROJECT				

CONTRACT NO. 62K33

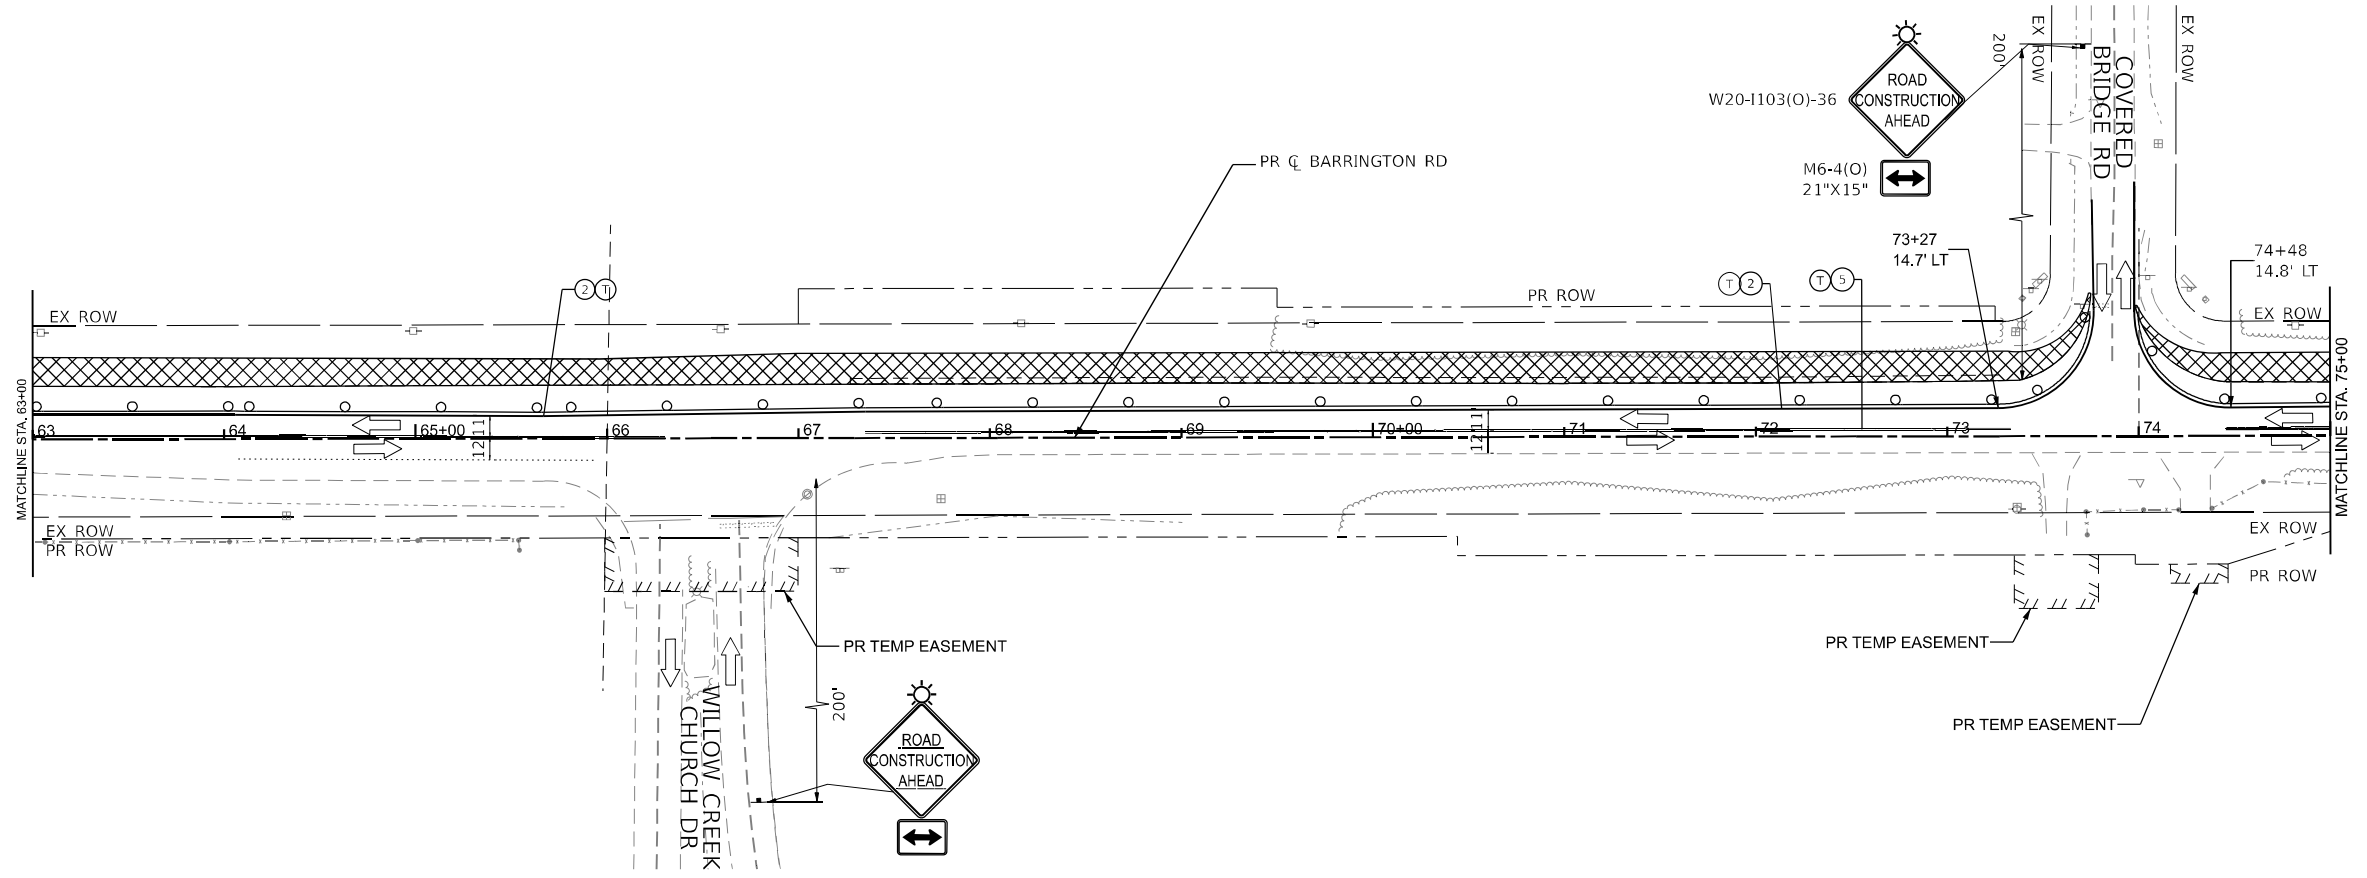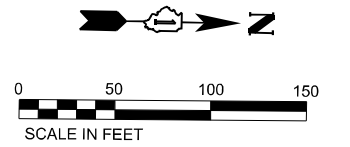

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▨	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▨	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▨	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\draft\...
FILE NAME: ...



OSEH inc.
312 W. VAN BUREN ST.
SUITE 300
CHICAGO, IL 60607
WWW.OSEHINC.COM

USER NAME	= Amulya Pusuluri	DESIGNED	- AP	REVISED	-
DRAWN	- ML	CHECKED	- MM	REVISED	-
PLOT SCALE	= 100.245' / in.	DATE	- 01/21/2026	REVISED	-
PLOT DATE	= 1/20/2026				

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCALE:		SHEET 20 OF 73 SHEETS	STA. 63+00	TO STA. 75+00
--------	--	-----------------------	------------	---------------

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	103
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

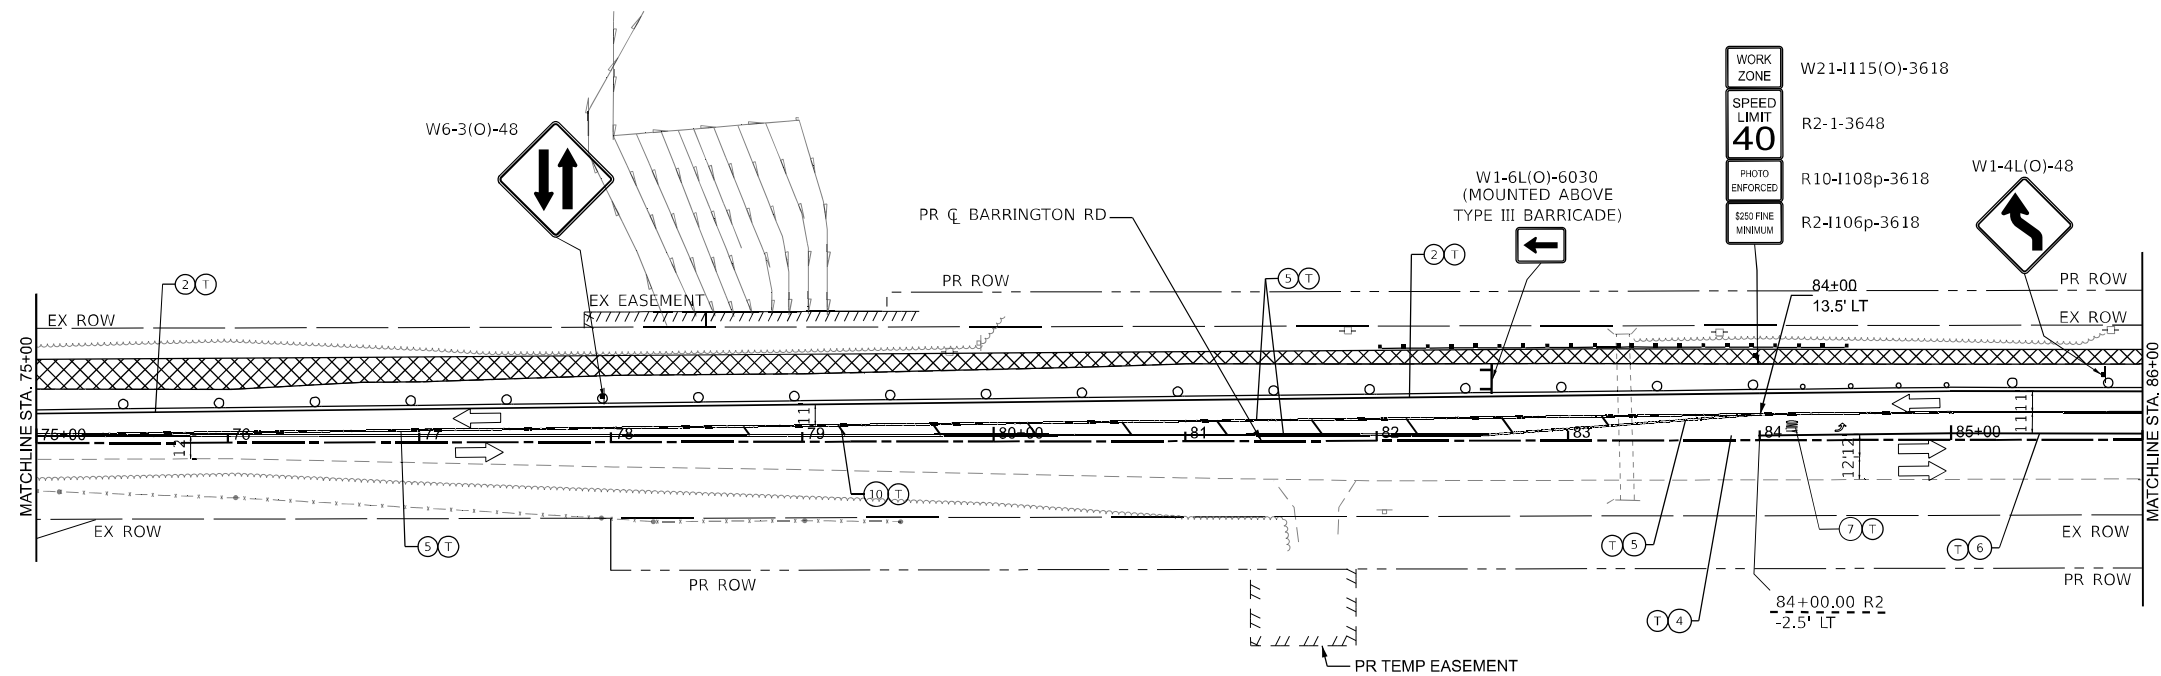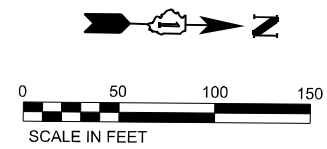

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▬ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▬ TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡ TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	↑ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD



MODEL: D:\file1
 FILE NAME: p:\work\p1\inc\transys\comp\transys\comp\p1\Documents\Project\2020\CH401401200181C\0102 - Sheets\08\MDT\PreStage MDT Sheets\12X33_MDT_Sheet 7

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	PLOT SCALE = 100.245' / in.	DRAWN - ML	REVISED - _____
	PLOT DATE = 1/20/2026	CHECKED - MM	REVISED - _____
		DATE - 01/21/2026	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - PRE-STAGE	
SCALE:	SHEET 21 OF 73 SHEETS STA. 75+00 TO STA. 86+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	104
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

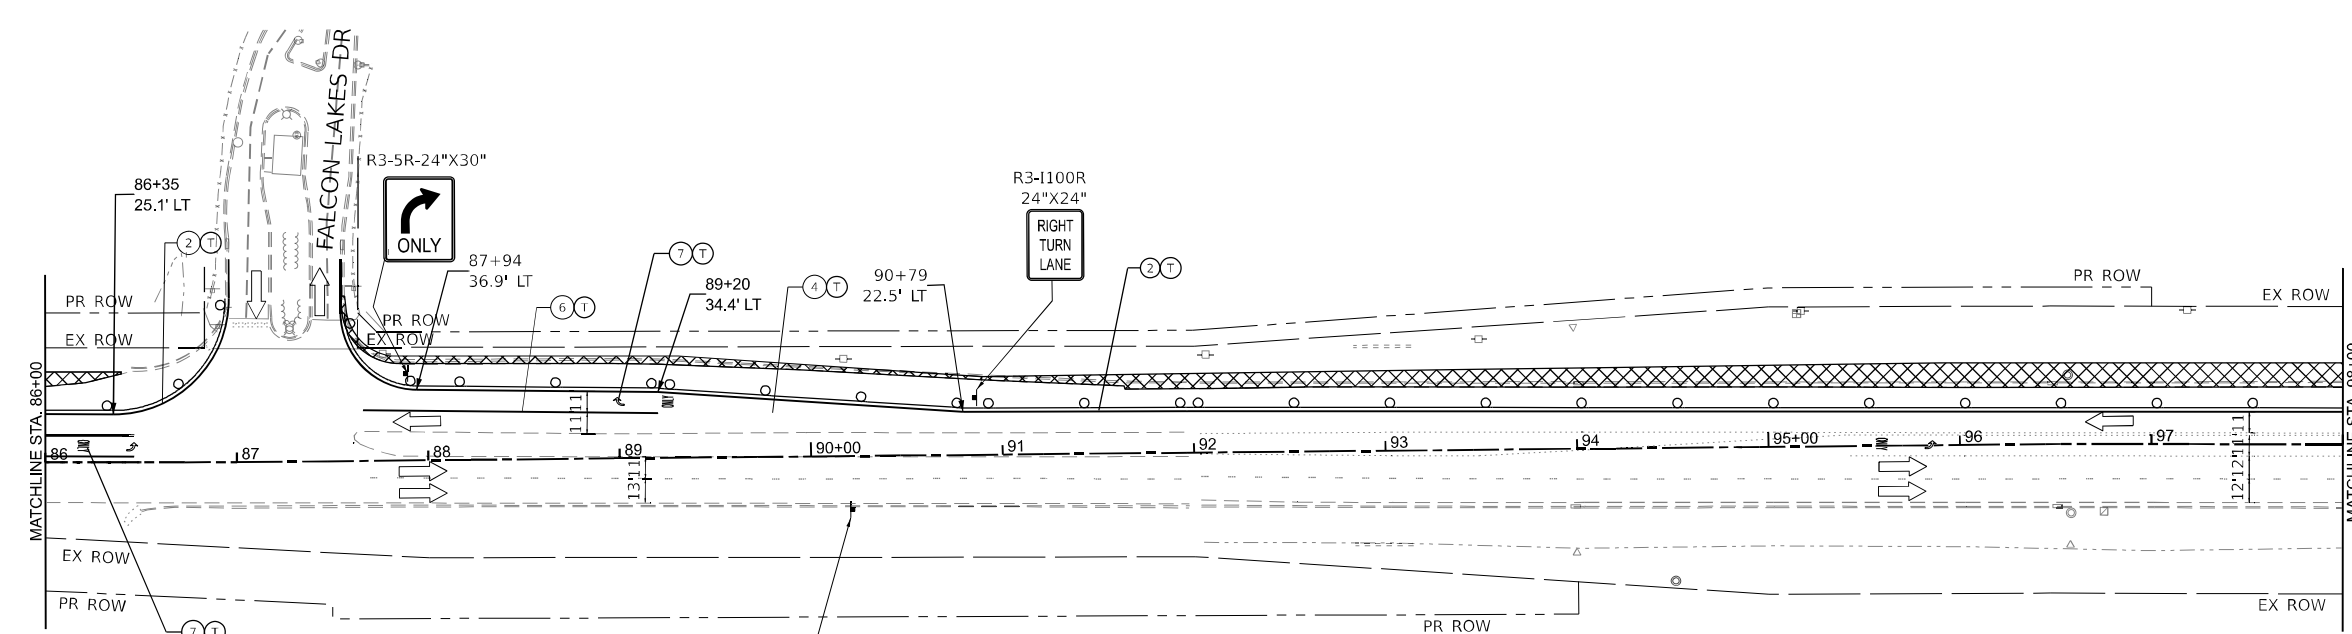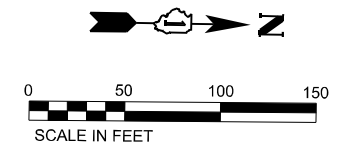



WORK ZONE	W21-1115(O)-3618
SPEED LIMIT	R2-1-3648
PHOTO ENFORCED	R10-1108p-3618
\$250 FINE MINIMUM	R2-1106p-3618

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file11... FILE NAME: ... 3120 W WALKER ST SUITE 200 CHICAGO, IL 60607 WWW.OSEHINC.COM

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC BARRINGTON RD - PRE-STAGE		F.A.P. RTE. = 362	SECTION = 2019-161-W	COUNTY = COOK	TOTAL SHEETS = 666	SHEET NO. = 105
	PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED - _____		SCALE:	SHEET 22 OF 73 SHEETS	STA. 86+00 TO STA. 98+00	CONTRACT NO. 62K33 ILLINOIS FED. AID PROJECT			
PLOT DATE = 1/20/2026	DATE = 01/21/2026	REVISED - _____	REVISED - _____								

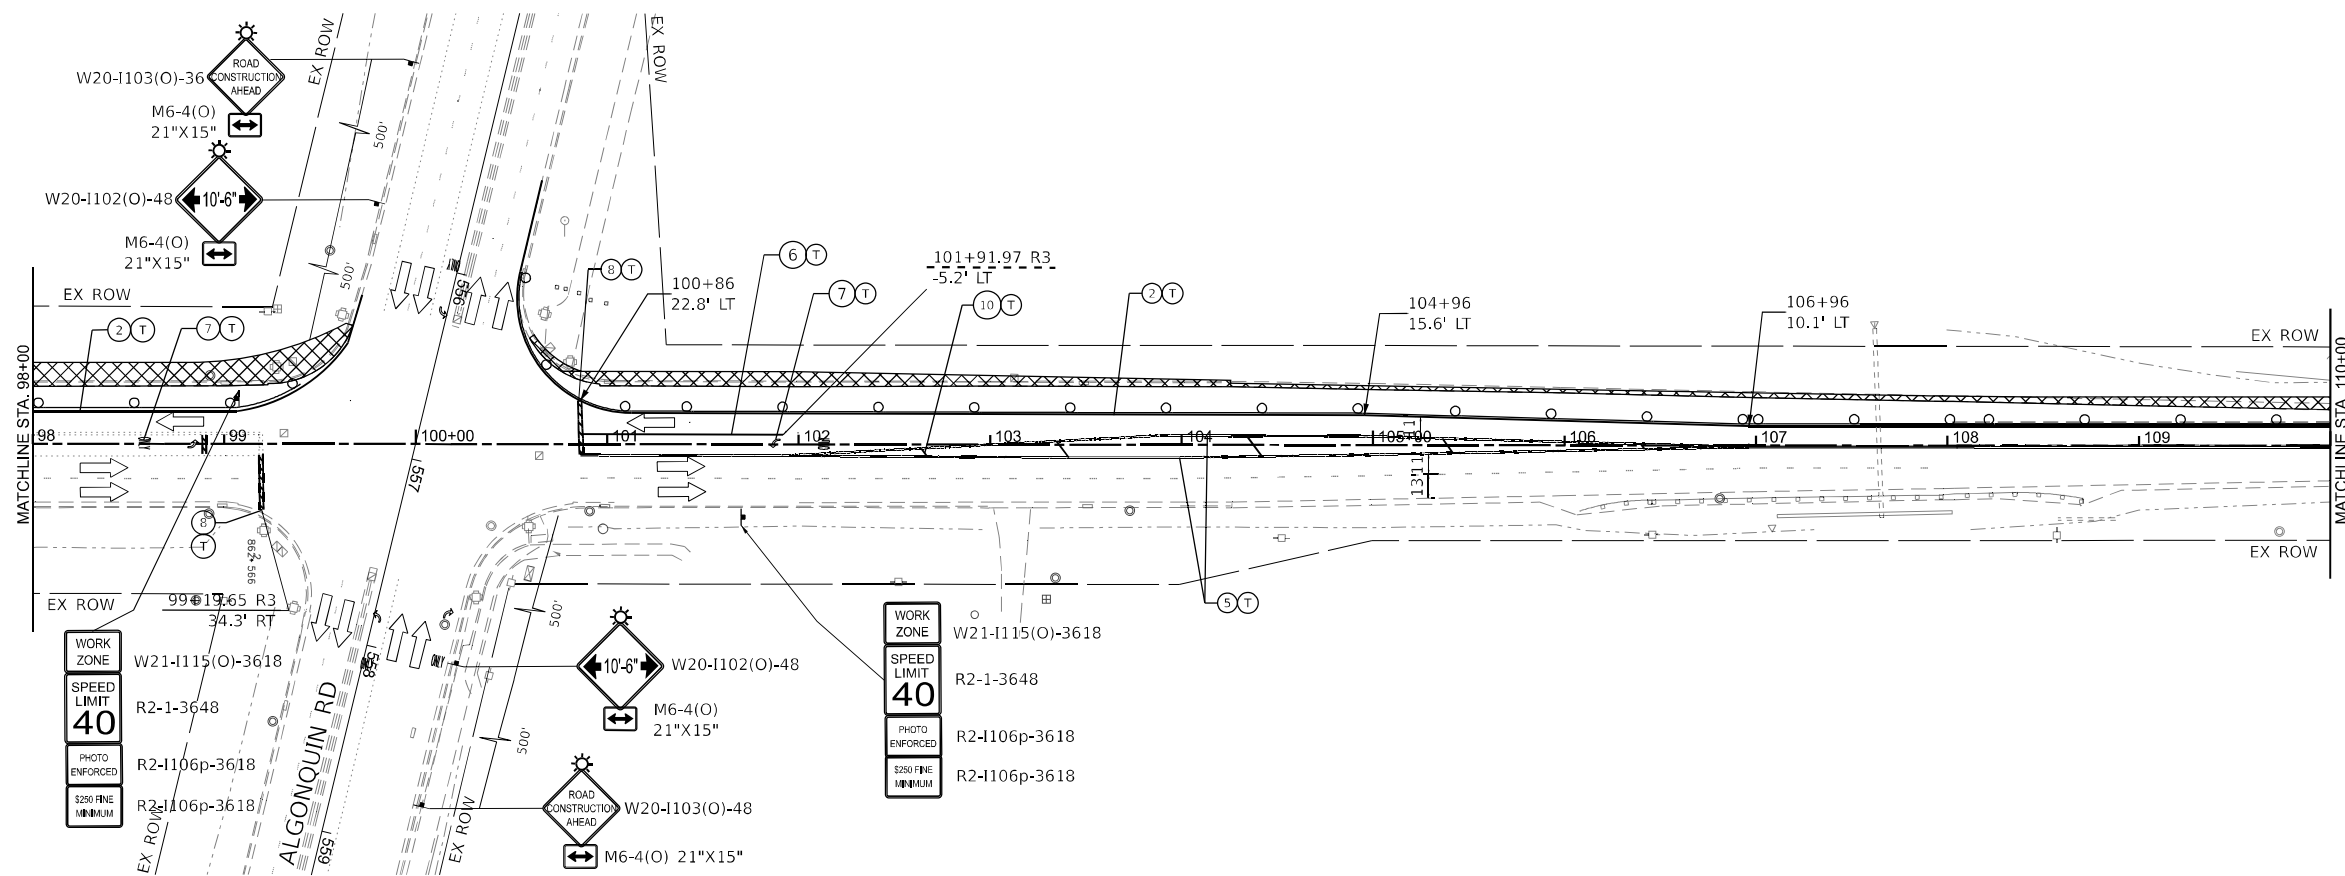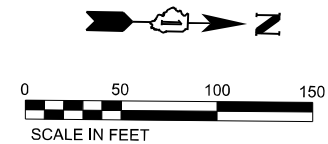

WORK ZONE
SPEED LIMIT
40
PHOTO ENFORCED
R2-1106p-3618
R2-1106p-3618

WORK ZONE
SPEED LIMIT
40
PHOTO ENFORCED
R2-1115(O)-3618
R2-1-3648
R2-1106p-3618
R2-1106p-3618

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▨	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▩	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file1... FILE NAME: ... PROJECT: ... SHEET: 9






USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISED -	
PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC BARRINGTON RD - PRE-STAGE			
SCALE:	SHEET 23 OF 73 SHEETS	STA. 98+00	TO STA. 110+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	106
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

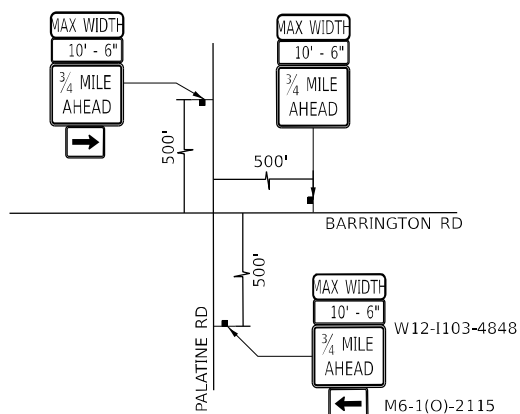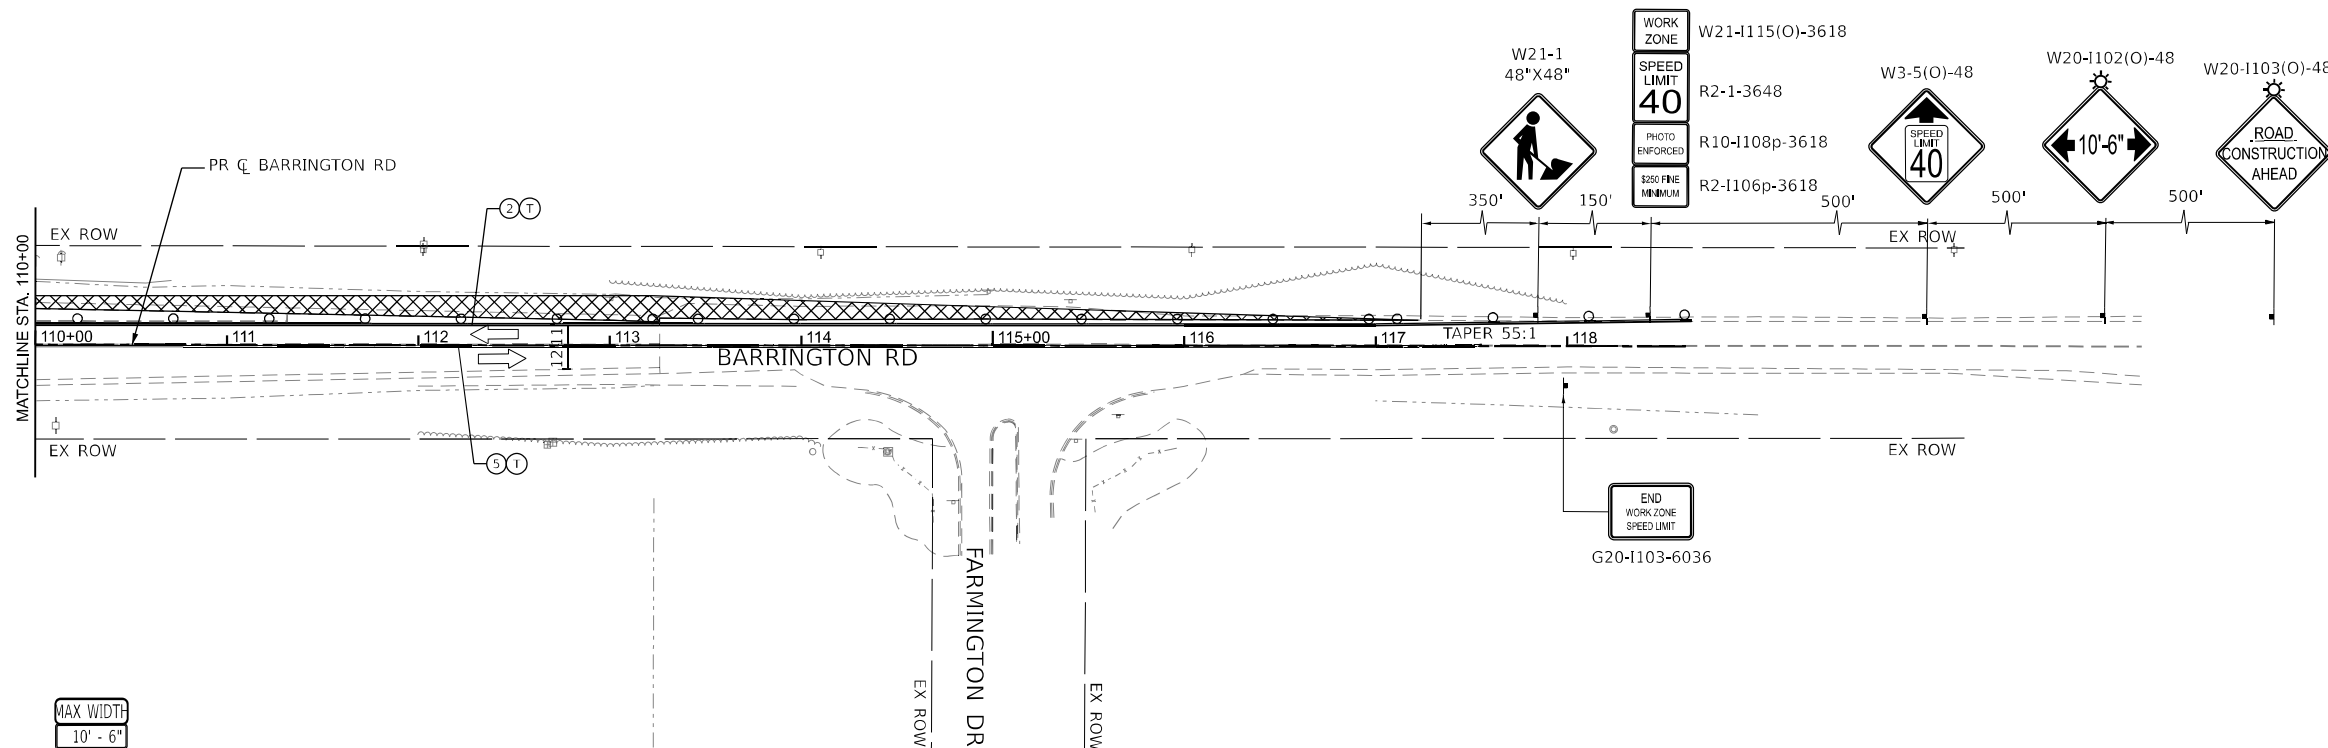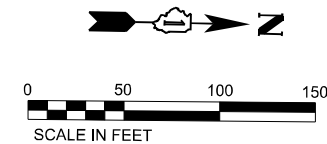

NOTE:
 ADVANCE MAXIMUM WIDTH RESTRICTON SIGNING SHALL REMAIN
 INSTALLED UNTIL THE COMPLETION OF ALL STAGES

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file1... FILE NAME: ... PROJECT: ... SHEETS: ...



OSEH inc.

USER NAME	= AmulyaPusuluri	DESIGNED	- AP	REVISED	-
DRAWN	- ML	CHECKED	- MM	REVISIED	-
PLOT SCALE	= 1/20.245" / in.	DATE	- 01/21/2026	REVISIED	-
PLOT DATE	= 1/20/2026				

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC	
BARRINGTON RD - PRE-STAGE	
SCALE:	SHEET 24 OF 73 SHEETS STA. 110+00 TO STA. 118+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	107
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

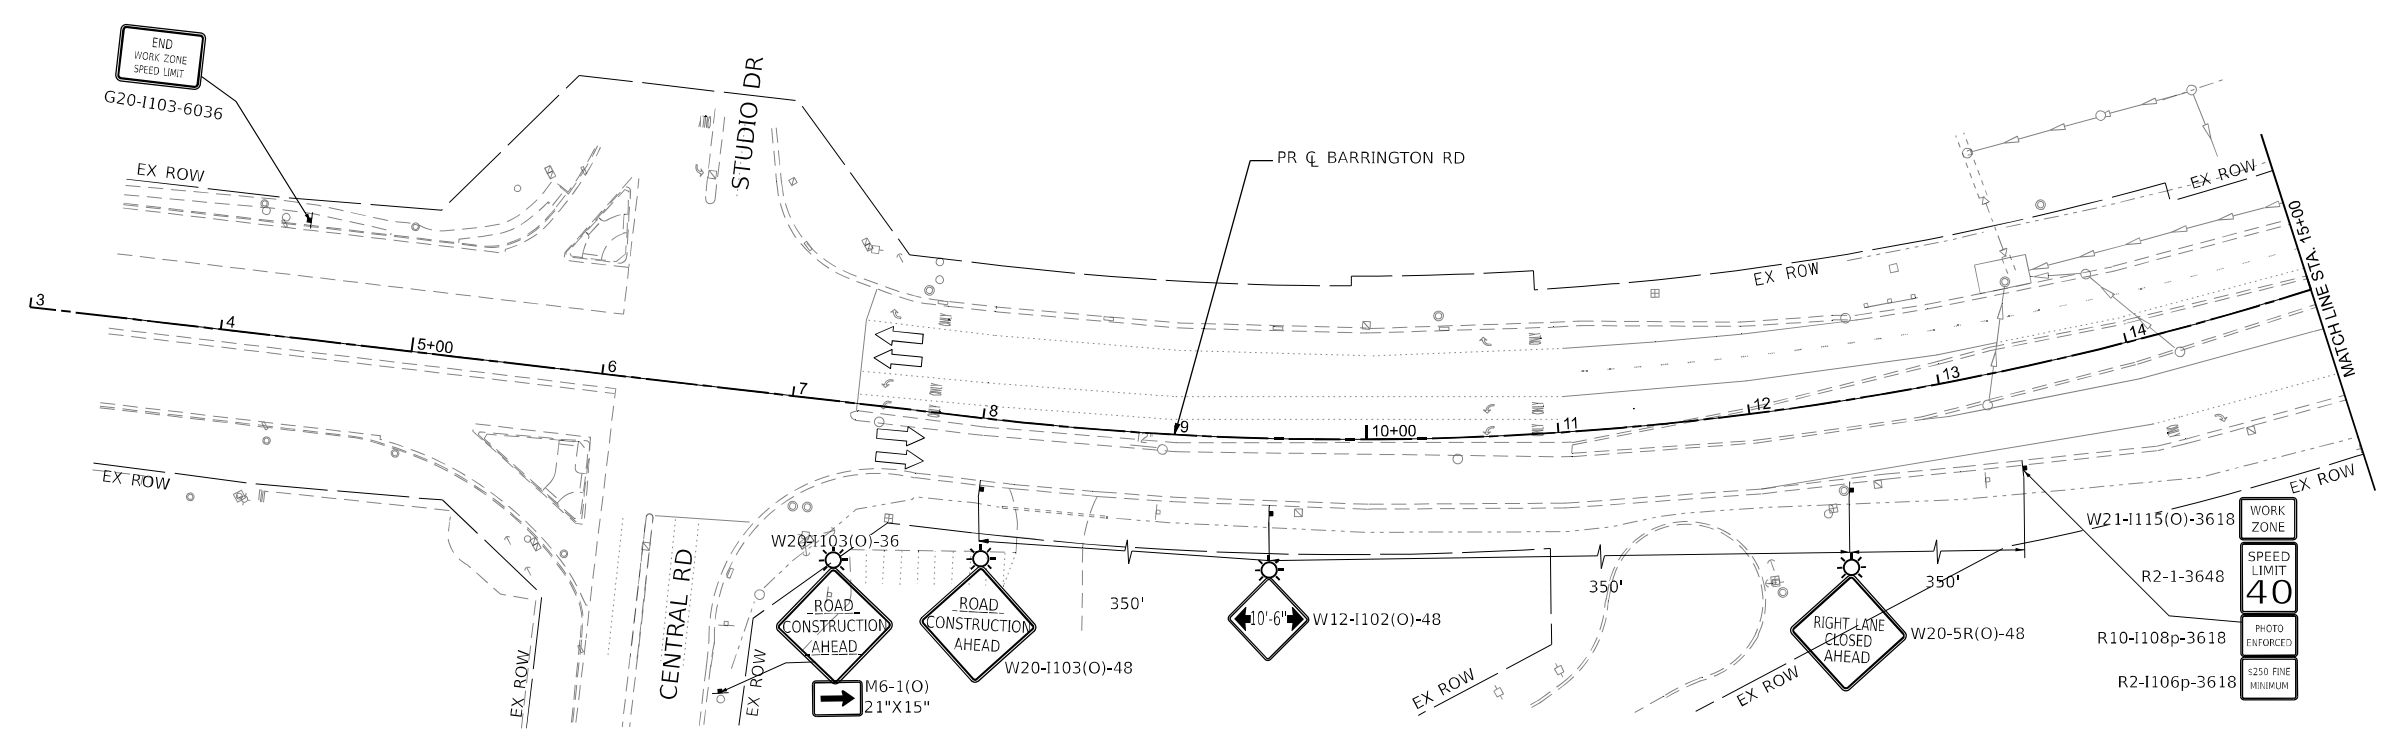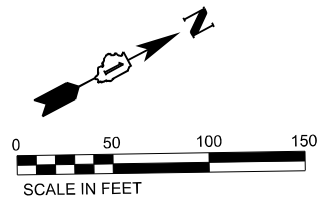

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⋮	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⊙	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\info...
 FILE NAME: ...
 PROJECT: ...
 SHEET: 108 OF 666





USER NAME = AmulyaPusuluri	DESIGNED - _____	REVISED - _____
DRAWN - _____	REVISIONS - _____	REVISIONS - _____
PLOT SCALE = 99.996' / in.	CHECKED - _____	REVISIONS - _____
PLOT DATE = 1/20/2026	DATE - _____	REVISIONS - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 1
 SCALE: SHEET 25 OF 73 SHEETS STA. 3+00 TO STA. 15+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	108
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

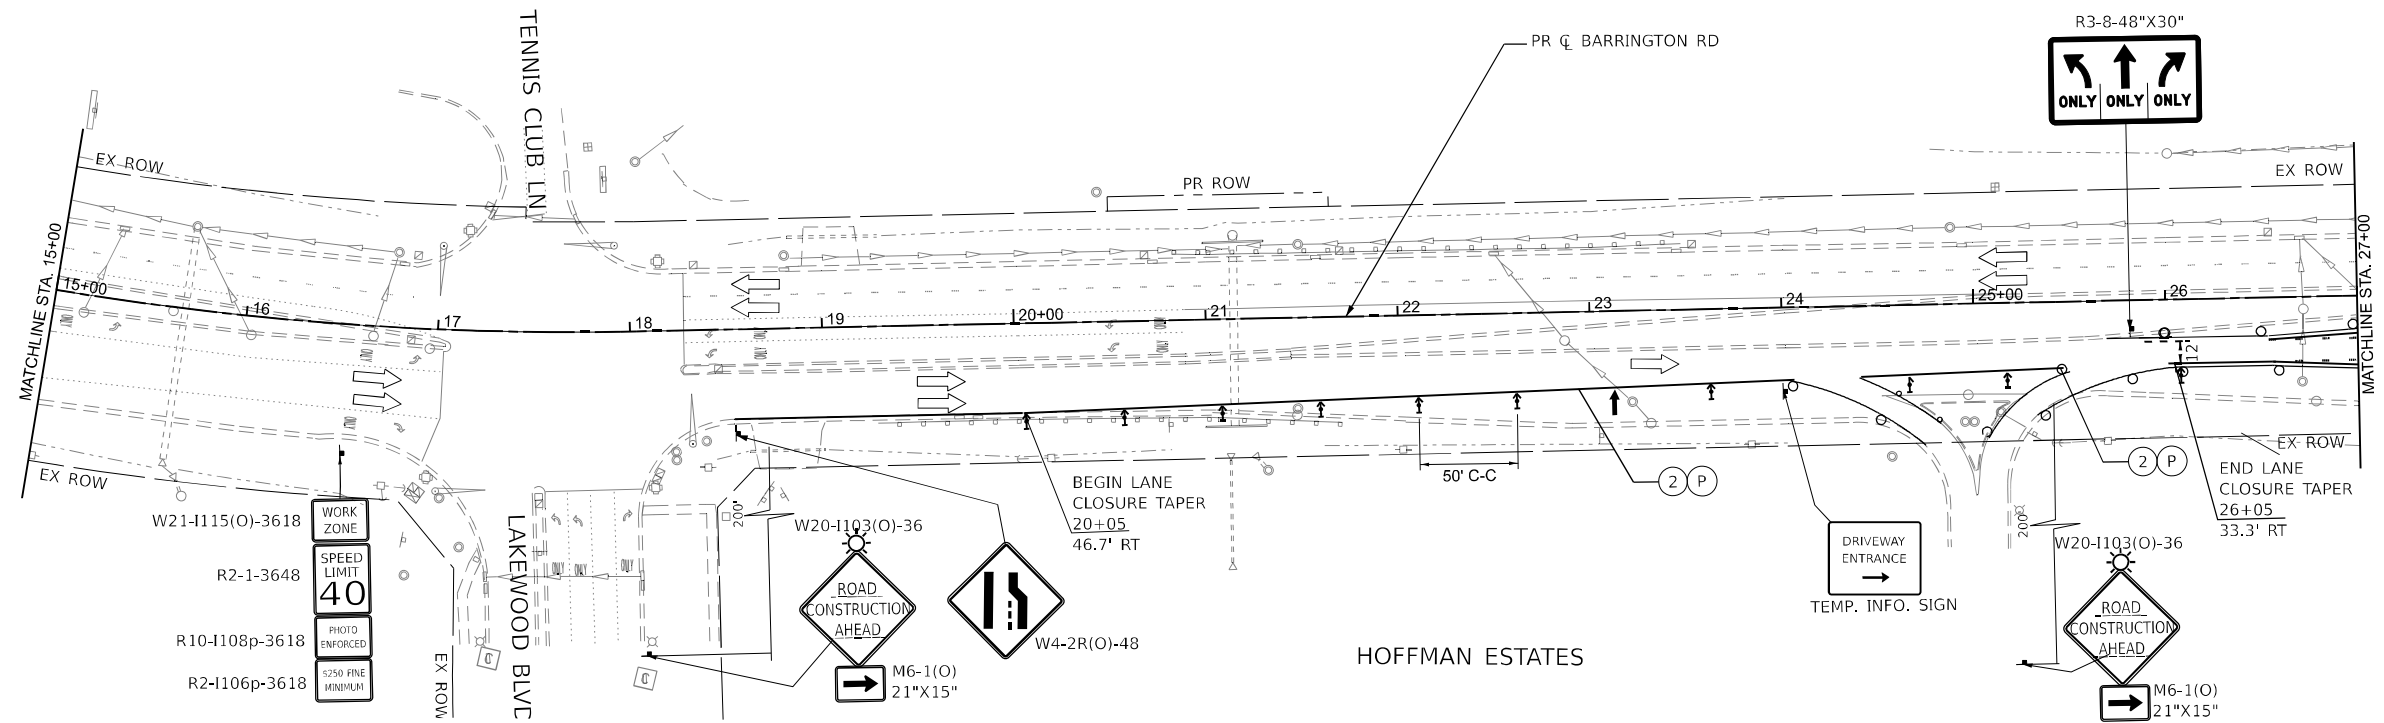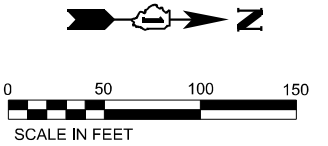

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⊙	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADI)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - _____	REVISED - _____
PLOT SCALE = 99.996' / in.	DRAWN - _____	REVISED - _____
PLOT DATE = 1/20/2026	CHECKED - _____	REVISED - _____
	DATE - _____	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 1		
SCALE:	SHEET 26 OF 73 SHEETS	STA. 15+00 TO STA. 27+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 109
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

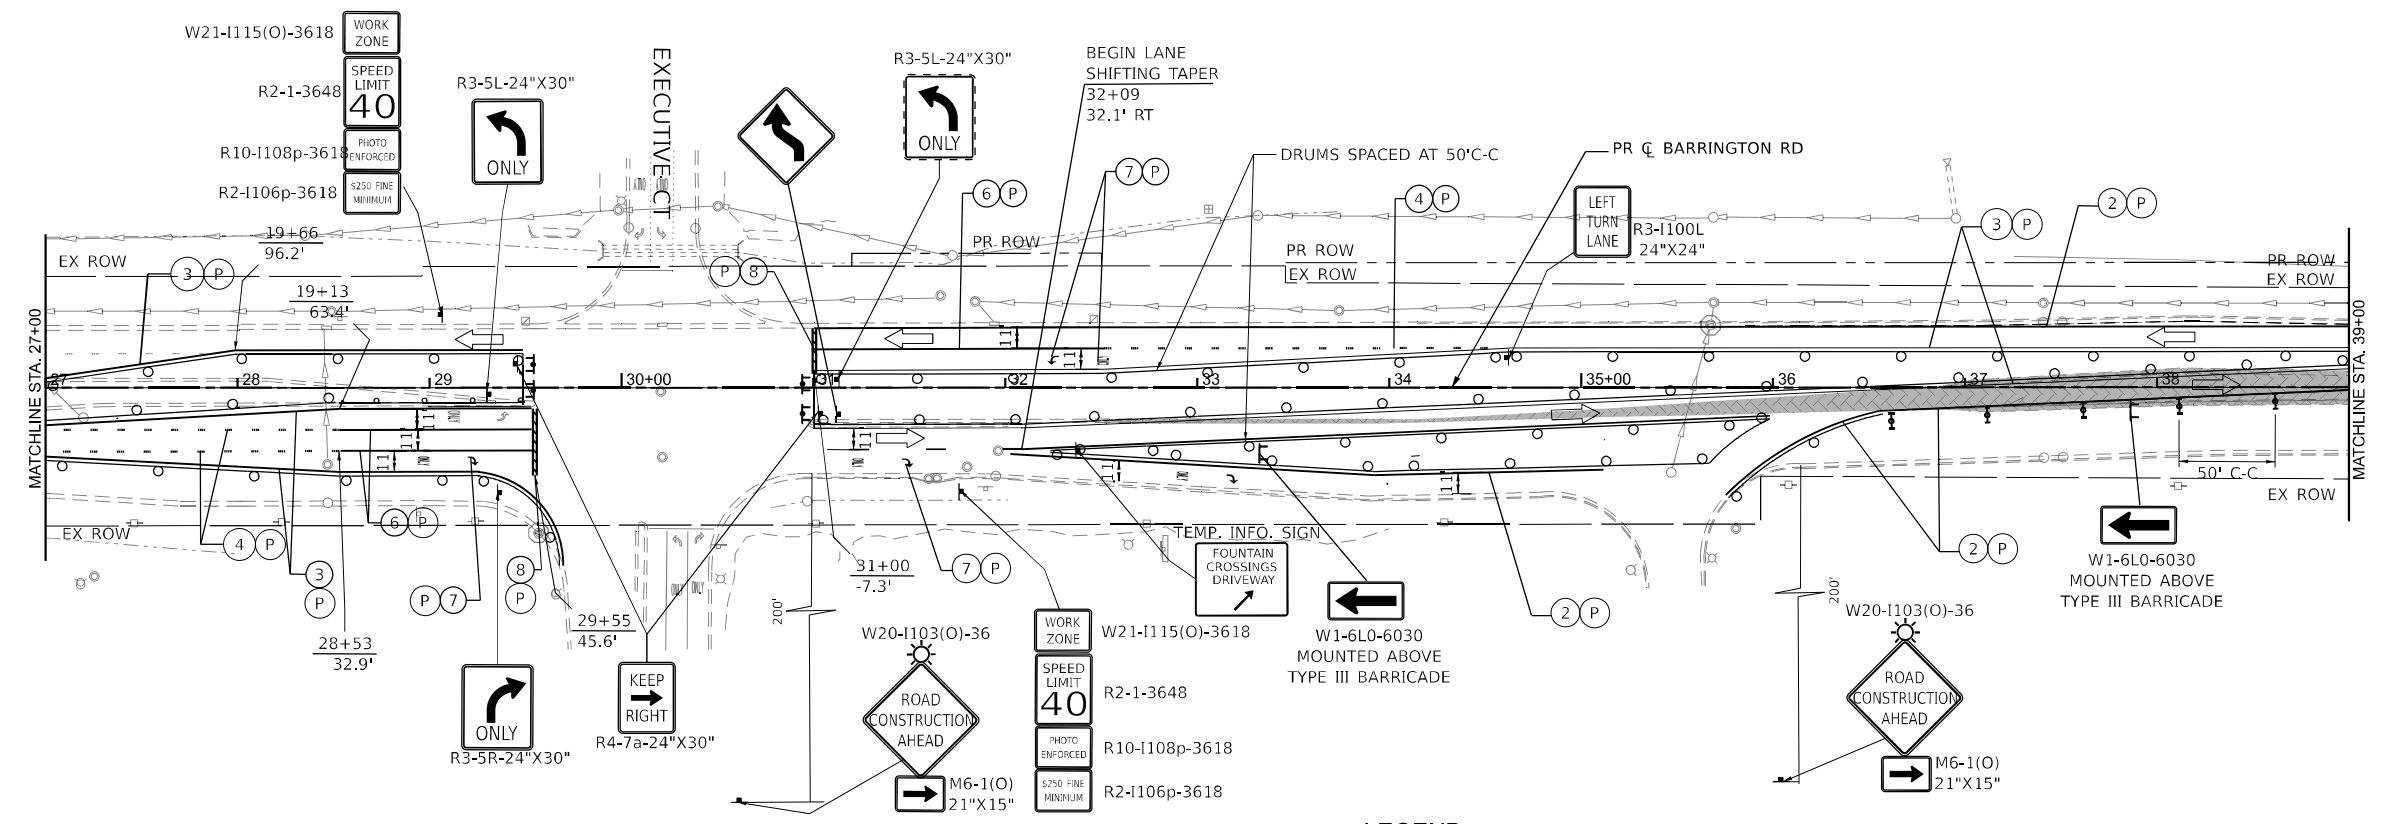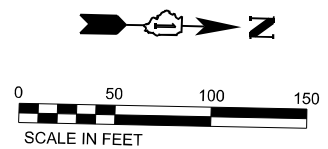

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED -	REVISED -
PLOT SCALE = 99.998' / in.	DRAWN -	REVISED -
PLOT DATE = 1/20/2026	CHECKED -	REVISED -
	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 1
 SCALE: SHEET 27 OF 73 SHEETS STA. 27+00 TO STA. 39+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	110
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

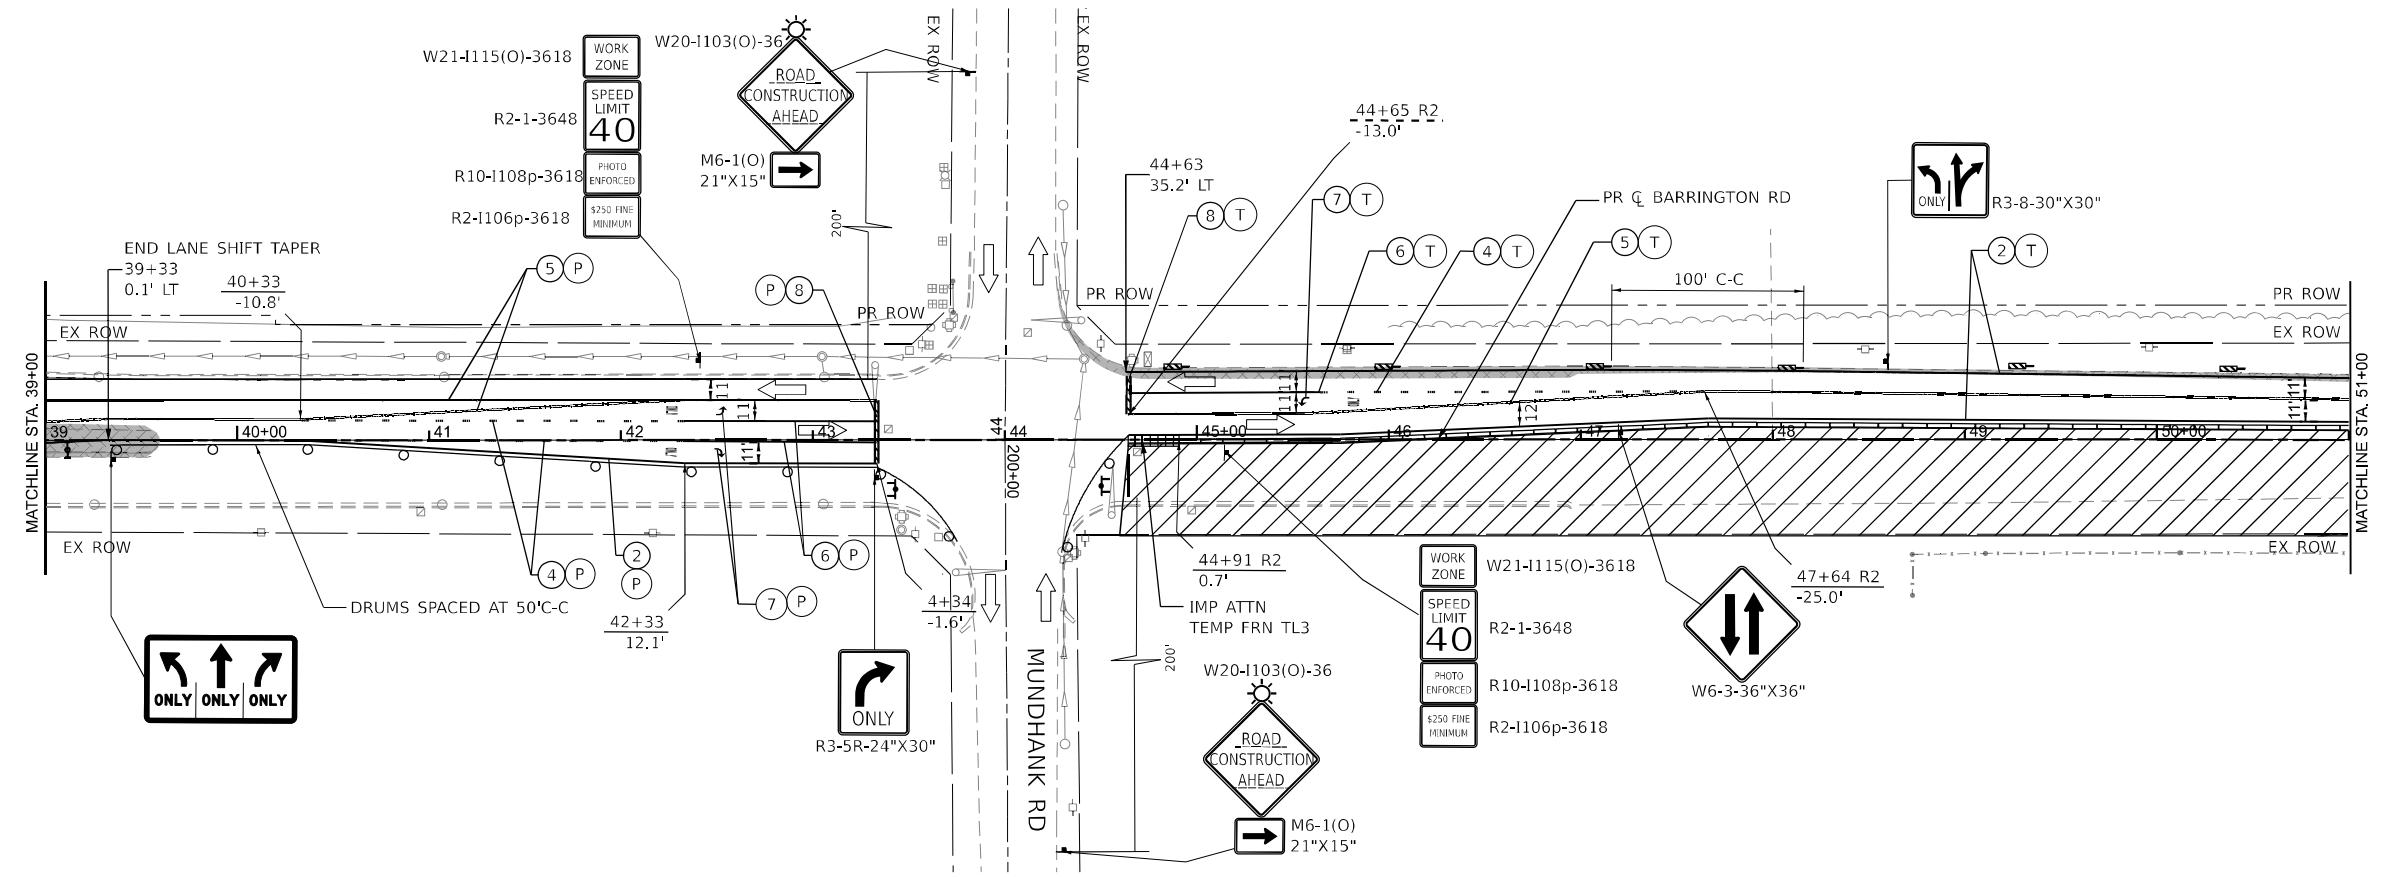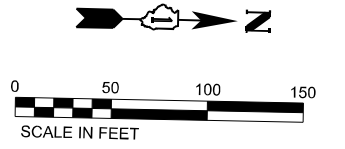

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	▨ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▩ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▤ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▥ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▧ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▩ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	▩ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▩ TEMPORARY CONCRETE BARRIER
Ⓣ TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡ TRAFFIC DIRECTION ARROW
Ⓟ TEMPORARY PAVEMENT MARKING - PAINT	↑ DIRECTION INDICATOR BARRICADE @ 50' C-C
▩ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD



MODEL: D:\info...
 FILE NAME: ...
 27+00 39+00

	USER NAME = AmulyaPusuluri	DESIGNED - _____	REVISED - _____
	PLOT SCALE = 99.998' / in.	DRAWN - _____ 3	REVISED - _____
	DATE = 1/20/2026	CHECKED - _____	REVISED - _____
		DATE - _____	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 1	
SCALE:	SHEET 28 OF 73 SHEETS STA. 39+00 TO STA. 51+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 111
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

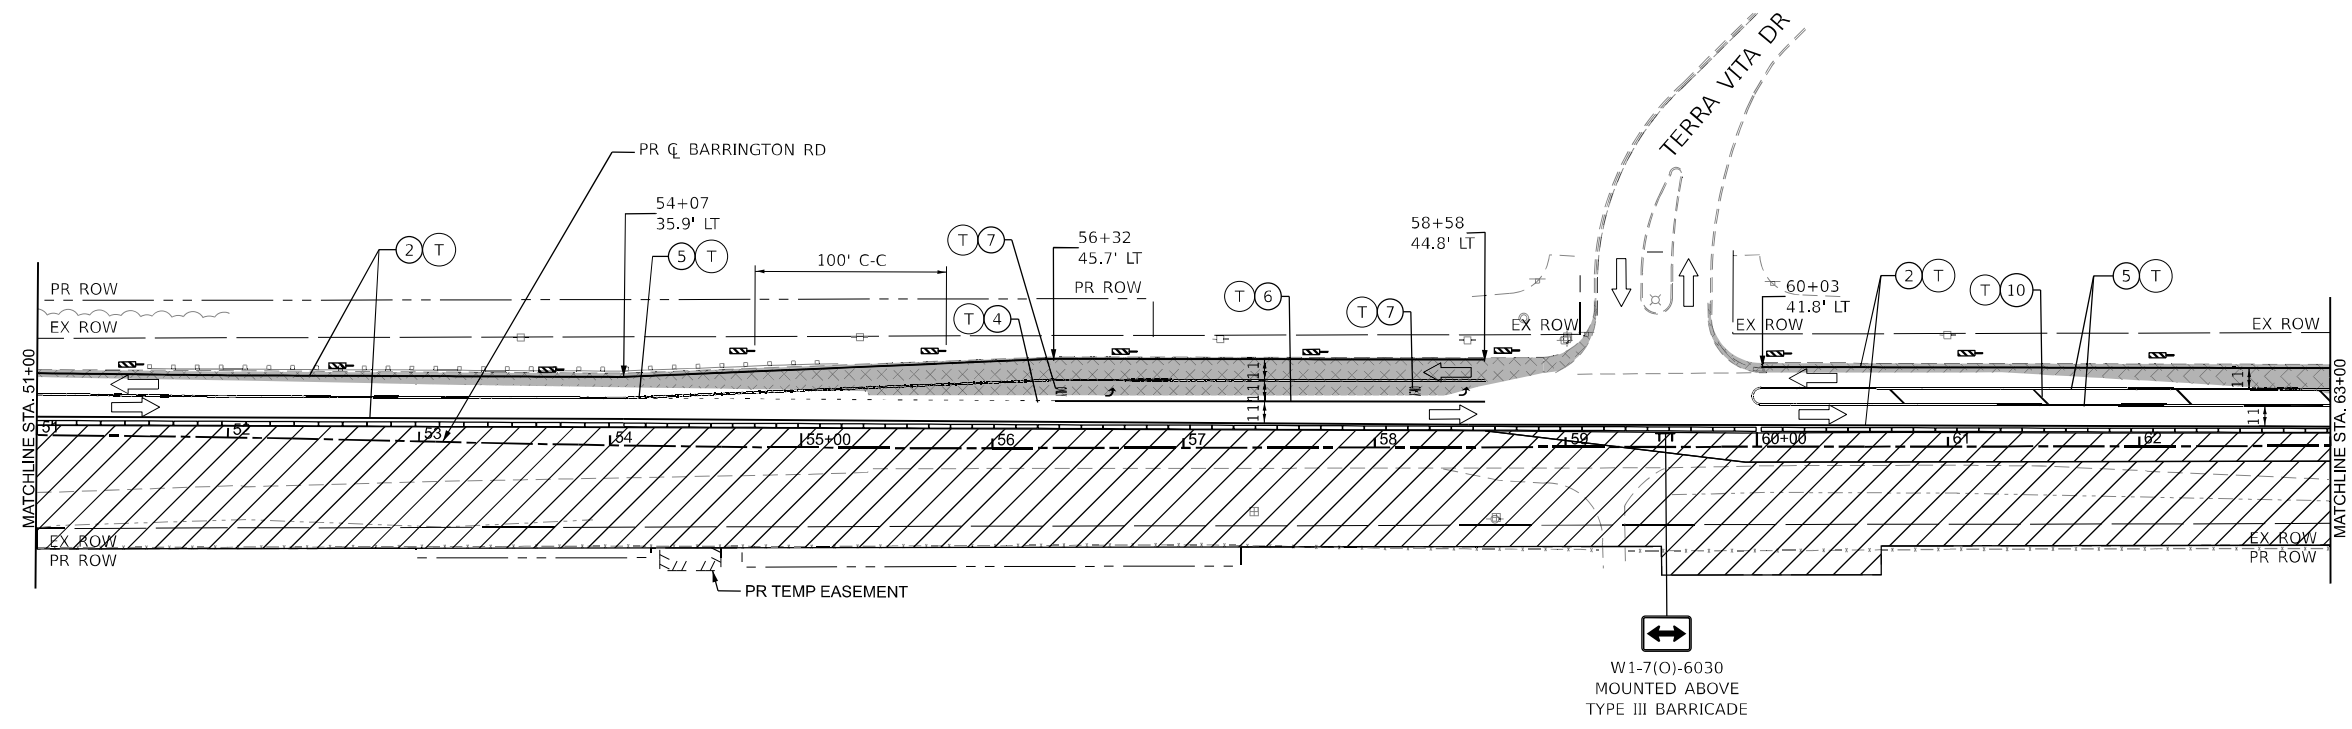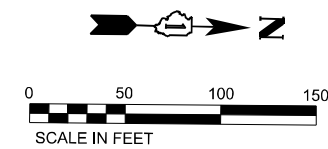

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD



MODEL: Default
 FILE NAME: I:\projects\2020\CH40140120001\B\CAD\02 - Sheets\6-6-MOT\162K33_MOT_Sheet 5

	USER NAME = AmulyaPusuluri	DESIGNED - _____	REVISED - _____
	PLOT SCALE = 100.418 * / in.	DRAWN - _____	REVISED - _____
	PLOT DATE = 1/20/2026	CHECKED - _____	REVISED - _____
		DATE - _____	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 1
 SCALE: SHEET 29 OF 73 SHEETS STA.51+00 TO STA.63+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 112
ILLINOIS FED. AID PROJECT			CONTRACT NO. 62K33	

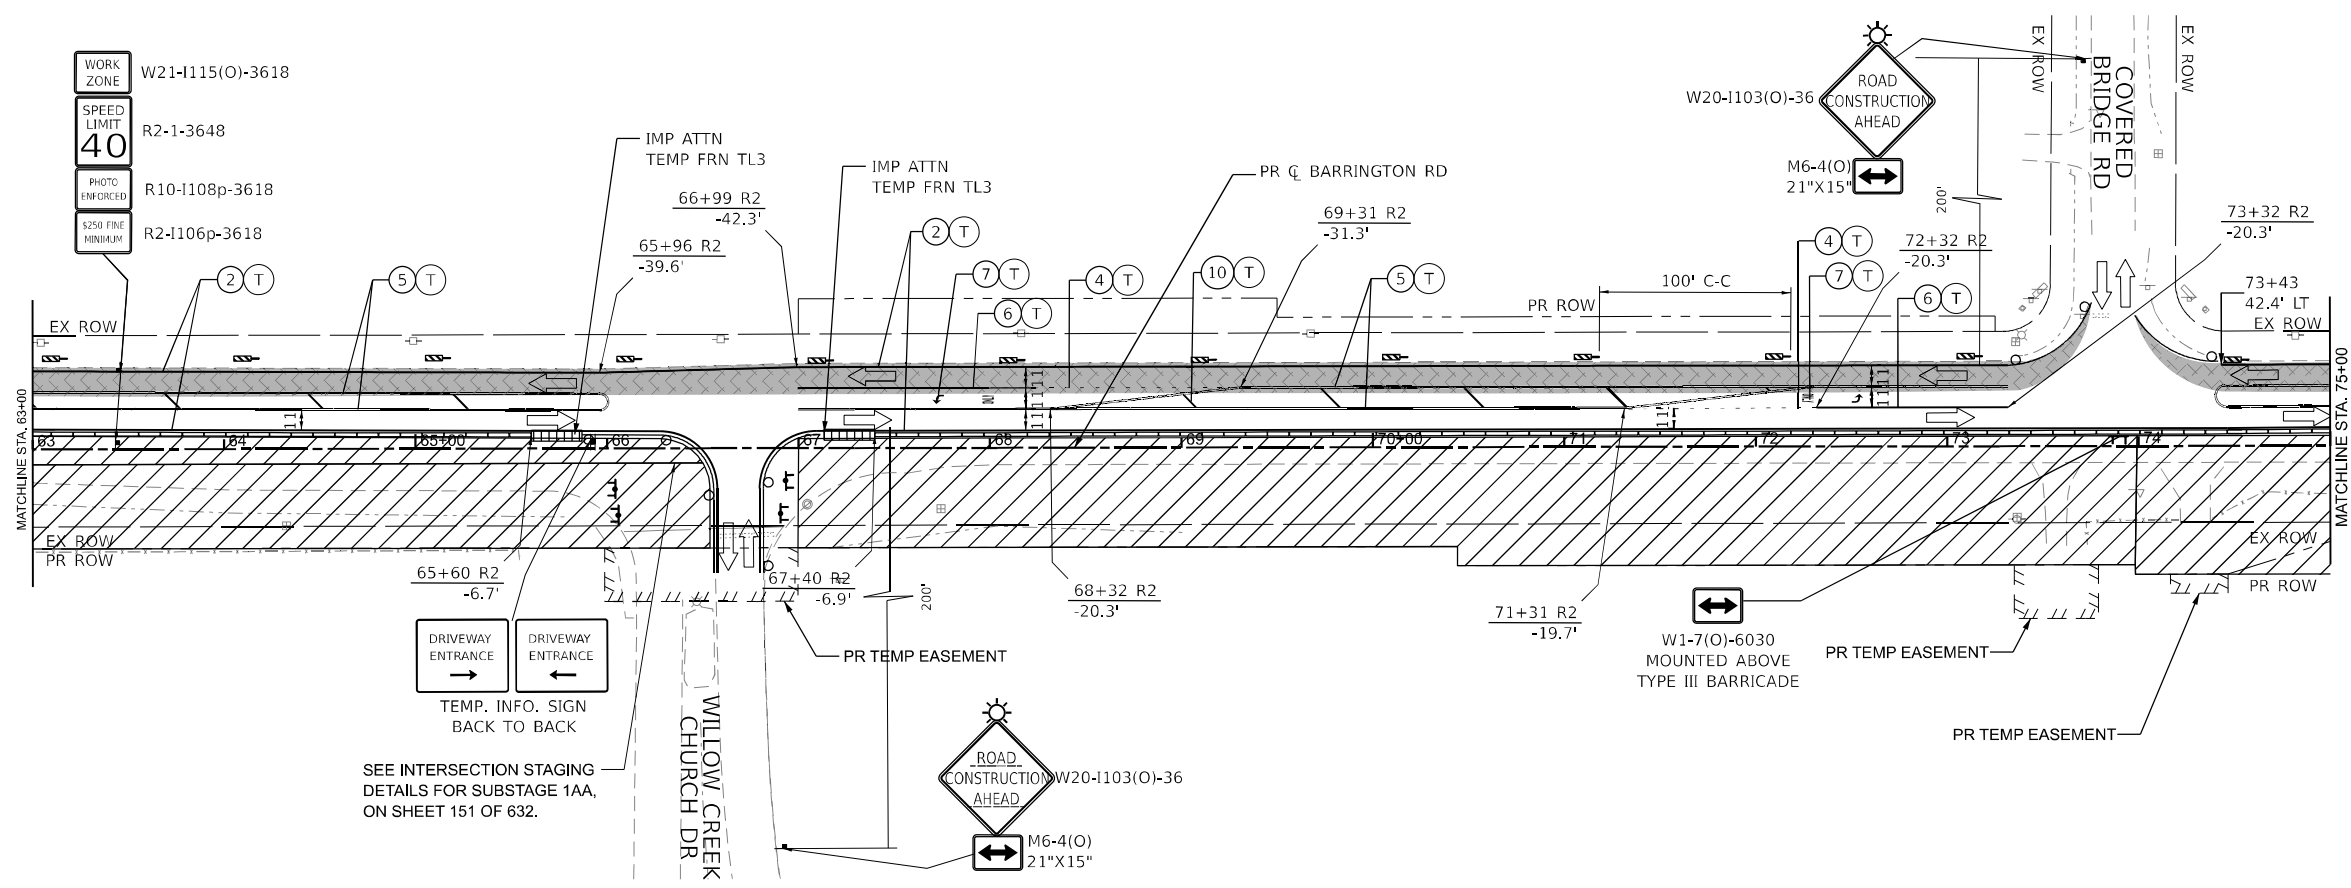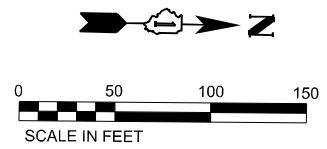

NOTES:

1. CONTRACTOR SHALL MAINTAIN THE ACCESS TO WILLO CREEK CHURCH ROAD ALL TIME DURING CONSTRUCTION AND CONSTRUCT NB PAVEMENT.
2. CONTRACTOR SHALL MAINTAIN NORMAL TRAFFIC PATTERN DURING SERVICE DAYS ON SUNDAY.

SEE INTERSECTION STAGING DETAILS FOR SUBSTAGE 1AA, ON SHEET 151 OF 632.

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: Default FILE NAME: p:\work\pav\mtd\444\trm\scorp\com\transyscomp\pwr\Documents\Project\2020\04401401200181C\0102 - Sheets\08-04\0102\62K33_MOT_Sheet 8





USER NAME = AmulyaPusuluri	DESIGNED - _____	REVISED - _____
PLOT SCALE = 100.245' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = 1/20/2026	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 1		
SCALE:	SHEET 30 OF 73 SHEETS	STA. 63+00 TO STA. 75+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 113
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

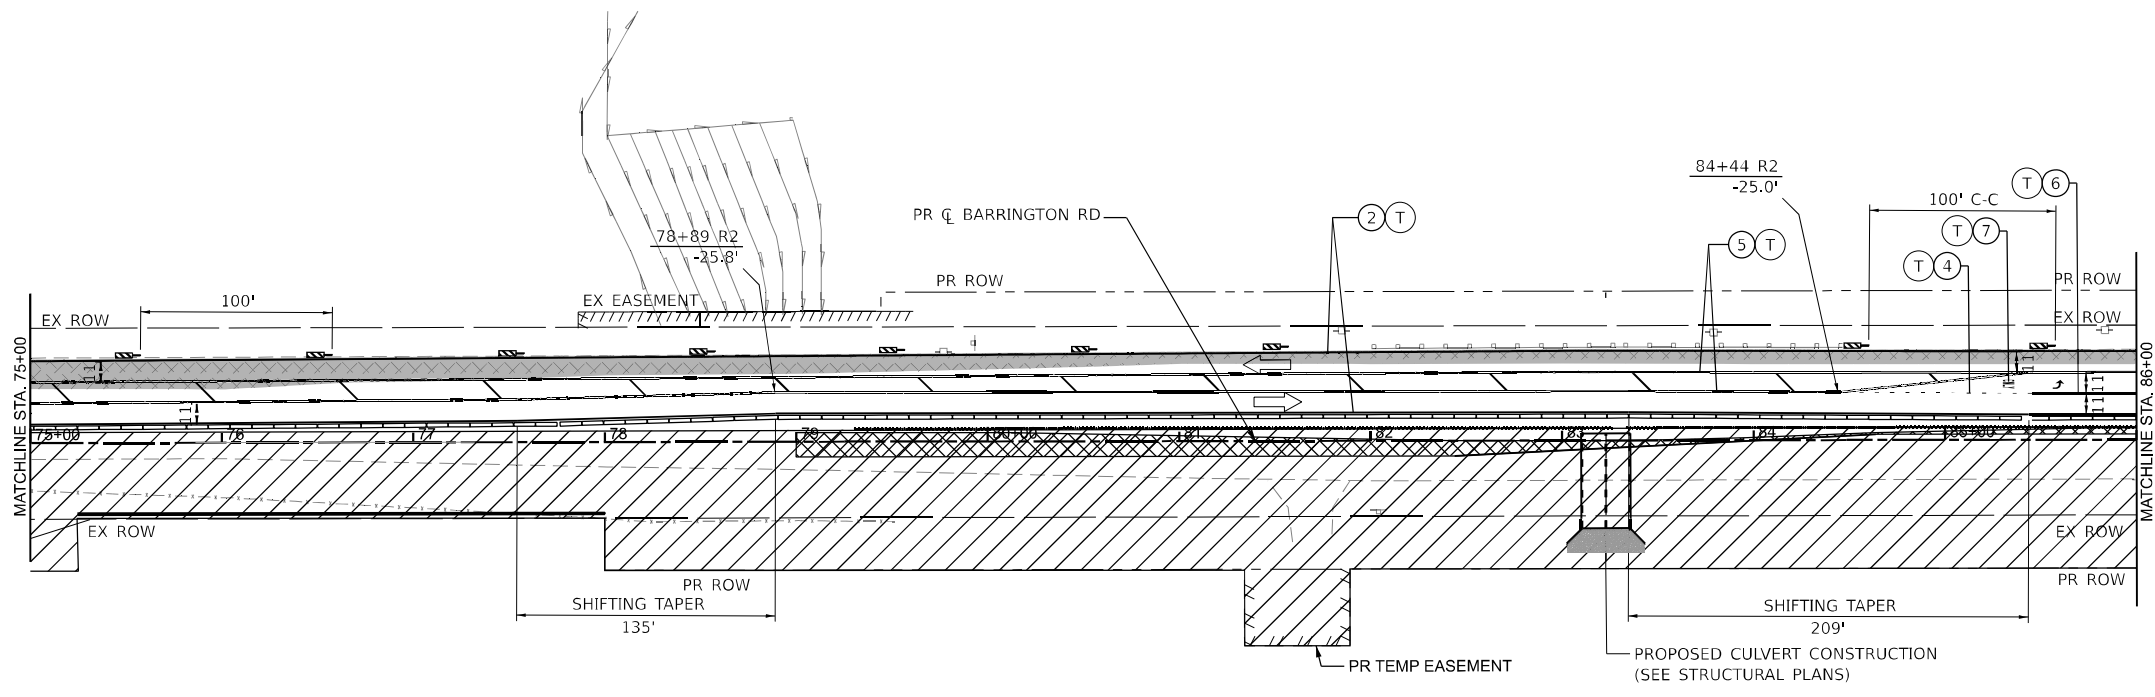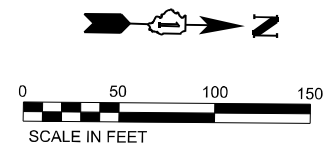

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▨	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADI)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	⚡	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file1\... FILE NAME: ...





USER NAME = AmulyaPusuluri	DESIGNED - _____	REVISED - _____
DRAWN - _____	REVISOR - _____	REVISIONS - _____
PLOT SCALE = 100.245' / in.	CHECKED - _____	REVISOR - _____
PLOT DATE = 1/20/2026	DATE - _____	REVISOR - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC	
BARRINGTON RD - STAGE 1	
SCALE:	SHEET 31 OF 73 SHEETS STA. 75+00 TO STA. 86+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 114
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

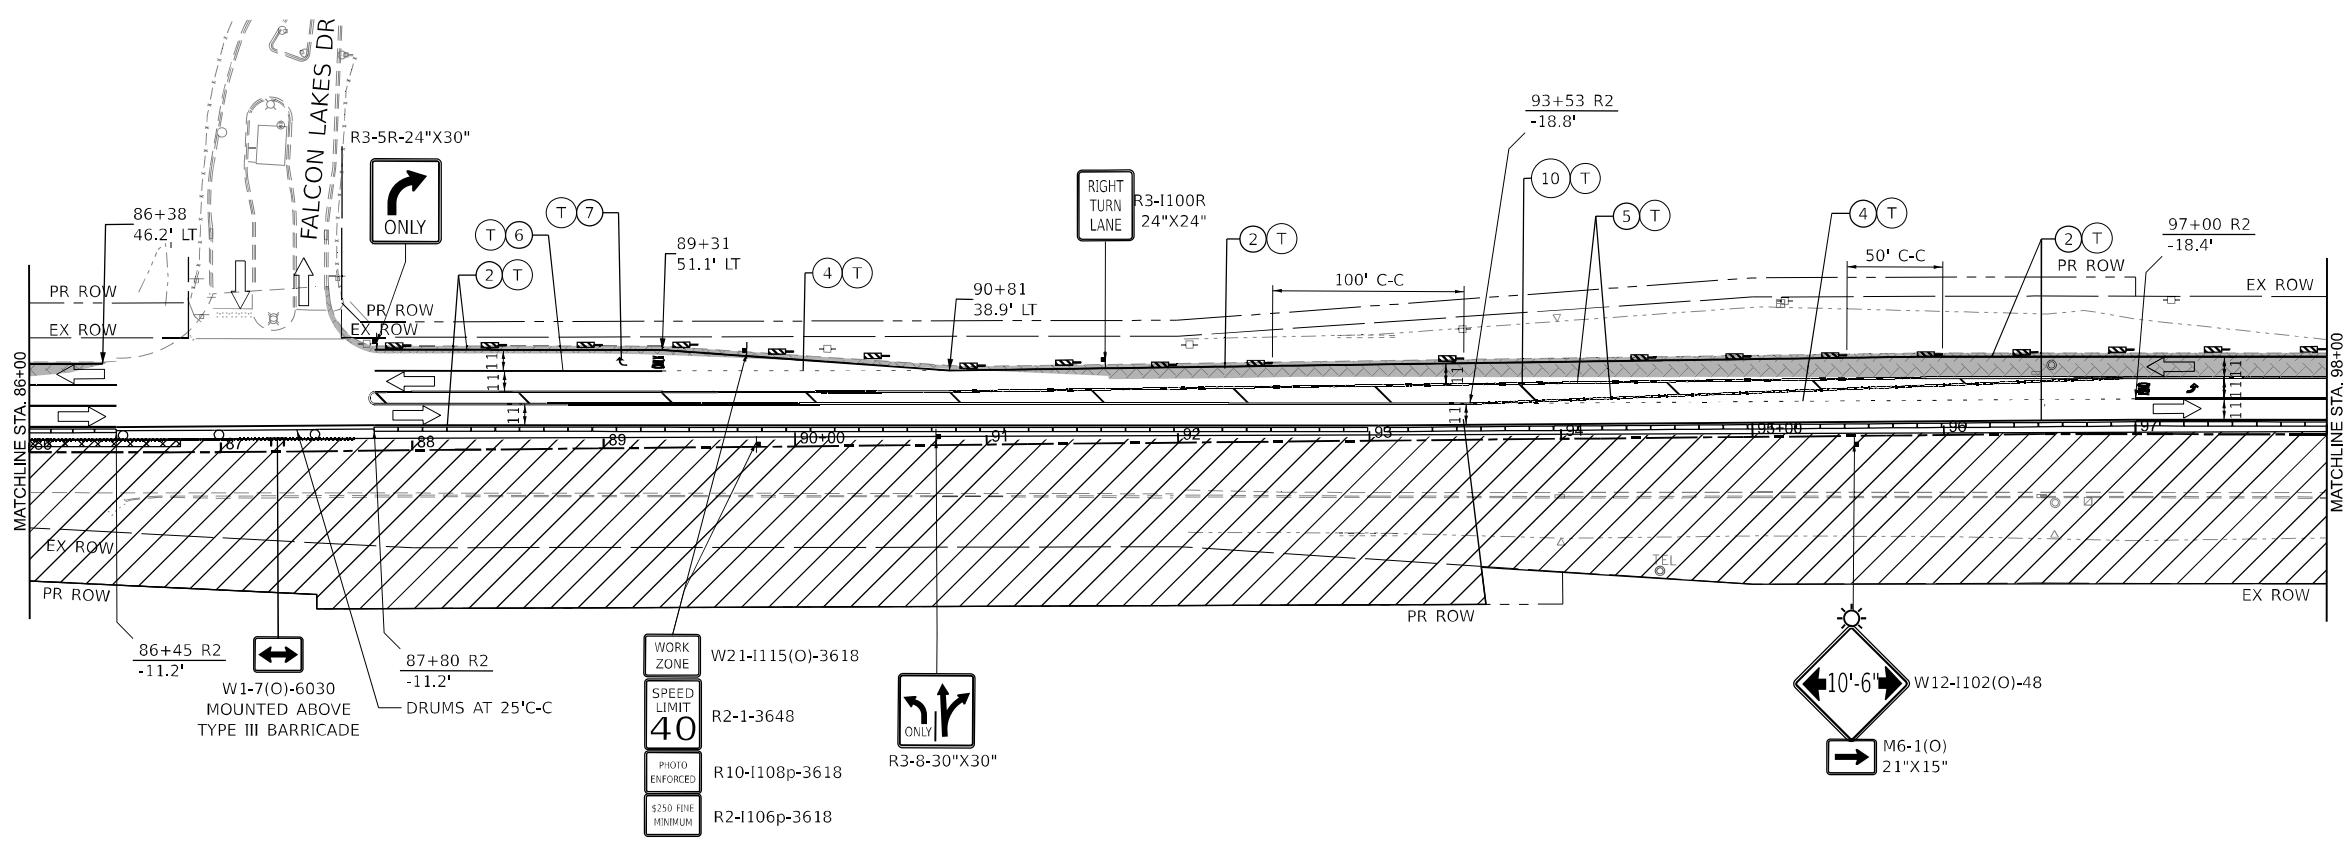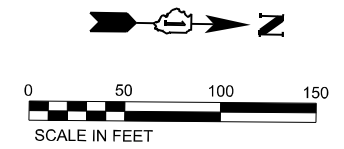

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▯	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▯▯	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▯	TEMPORARY CONCRETE BARRIER
(T)	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡	TRAFFIC DIRECTION ARROW
(P)	TEMPORARY PAVEMENT MARKING - PAINT	⚡	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\default... FILE NAME: ...





USER NAME = AmulyaPusuluri	DESIGNED -	REVISED -
PLOT SCALE = 100.245' / in.	CHECKED -	REVISED -
PLOT DATE = 1/20/2026	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
BARRINGTON RD - STAGE 1
SCALE: SHEET 32 OF 73 SHEETS STA. 86+00 TO STA. 98+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	115
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

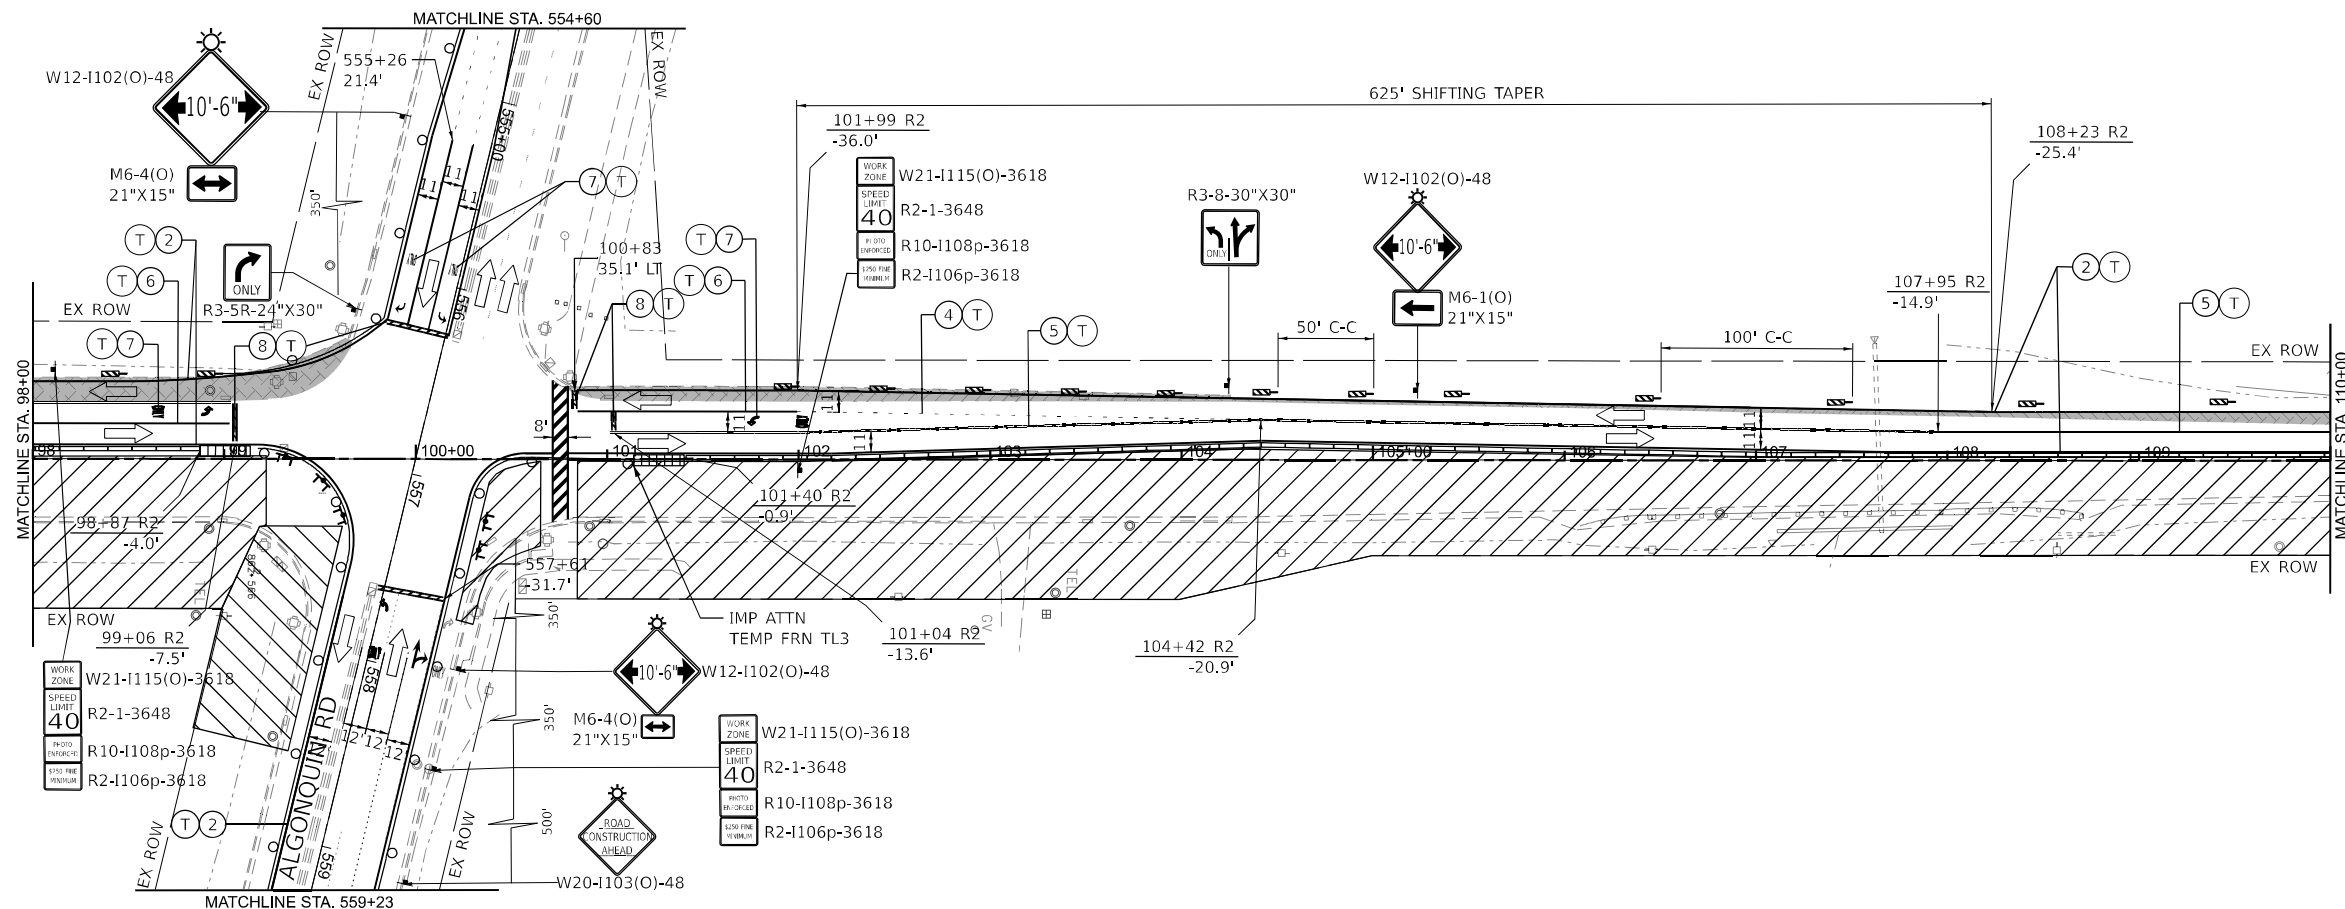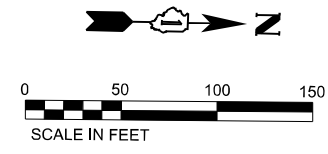

NOTES:

1. LANE CLOSURE, STAGING AND TRAFFIC CONTROL ALONG ALGONQUIN ROAD IS REQUIRED WHEN THE CONTRACTOR IS WORKING WITHIN 50' OF THE INTERSECTION.
2. CONTRACTOR SHALL MAINTAIN NORMAL TRAFFIC PATTERN ALONG ALGONQUIN ROAD AS SOON AS THE WORK IS COMPLETED IN THE VICINITY OF INTERSECTION.
3. CONTRACTOR SHALL MAINTAIN ACCESS TO PEDESTRIANS AND BIKES THRU THE INTERSECTION AT ALL TIMES DURING CONSTRUCTION.

LEGEND

1	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
2	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
3	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
4	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
5	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩	IMPACT ATTENUATOR
6	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
7	PAVEMENT MARKING - LETTERS AND SYMBOLS	⚡	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
8	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
9	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
10	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	⬆	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	➡	ARROW BOARD

MODEL: Default FILE NAME: p:\p\d\civilit1\c4\ltn\misc\transp\com\transp\com\p\proj\Documents\Project_2020\C4401401200181C4D092 - Sheets\08-MOT\162K33_MOT_Sheet 9





USER NAME = Amulya Pusuluri	DESIGNED - _____	REVISED - _____
PLOT SCALE = 100.245' / in.	DRAWN - _____	REVISED - _____
PLOT DATE = 1/20/2026	CHECKED - _____	REVISED - _____
	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
BARRINGTON RD - STAGE 1
SCALE: SHEET 33 OF 73 SHEETS STA. 98+00 TO STA. 110+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	116
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

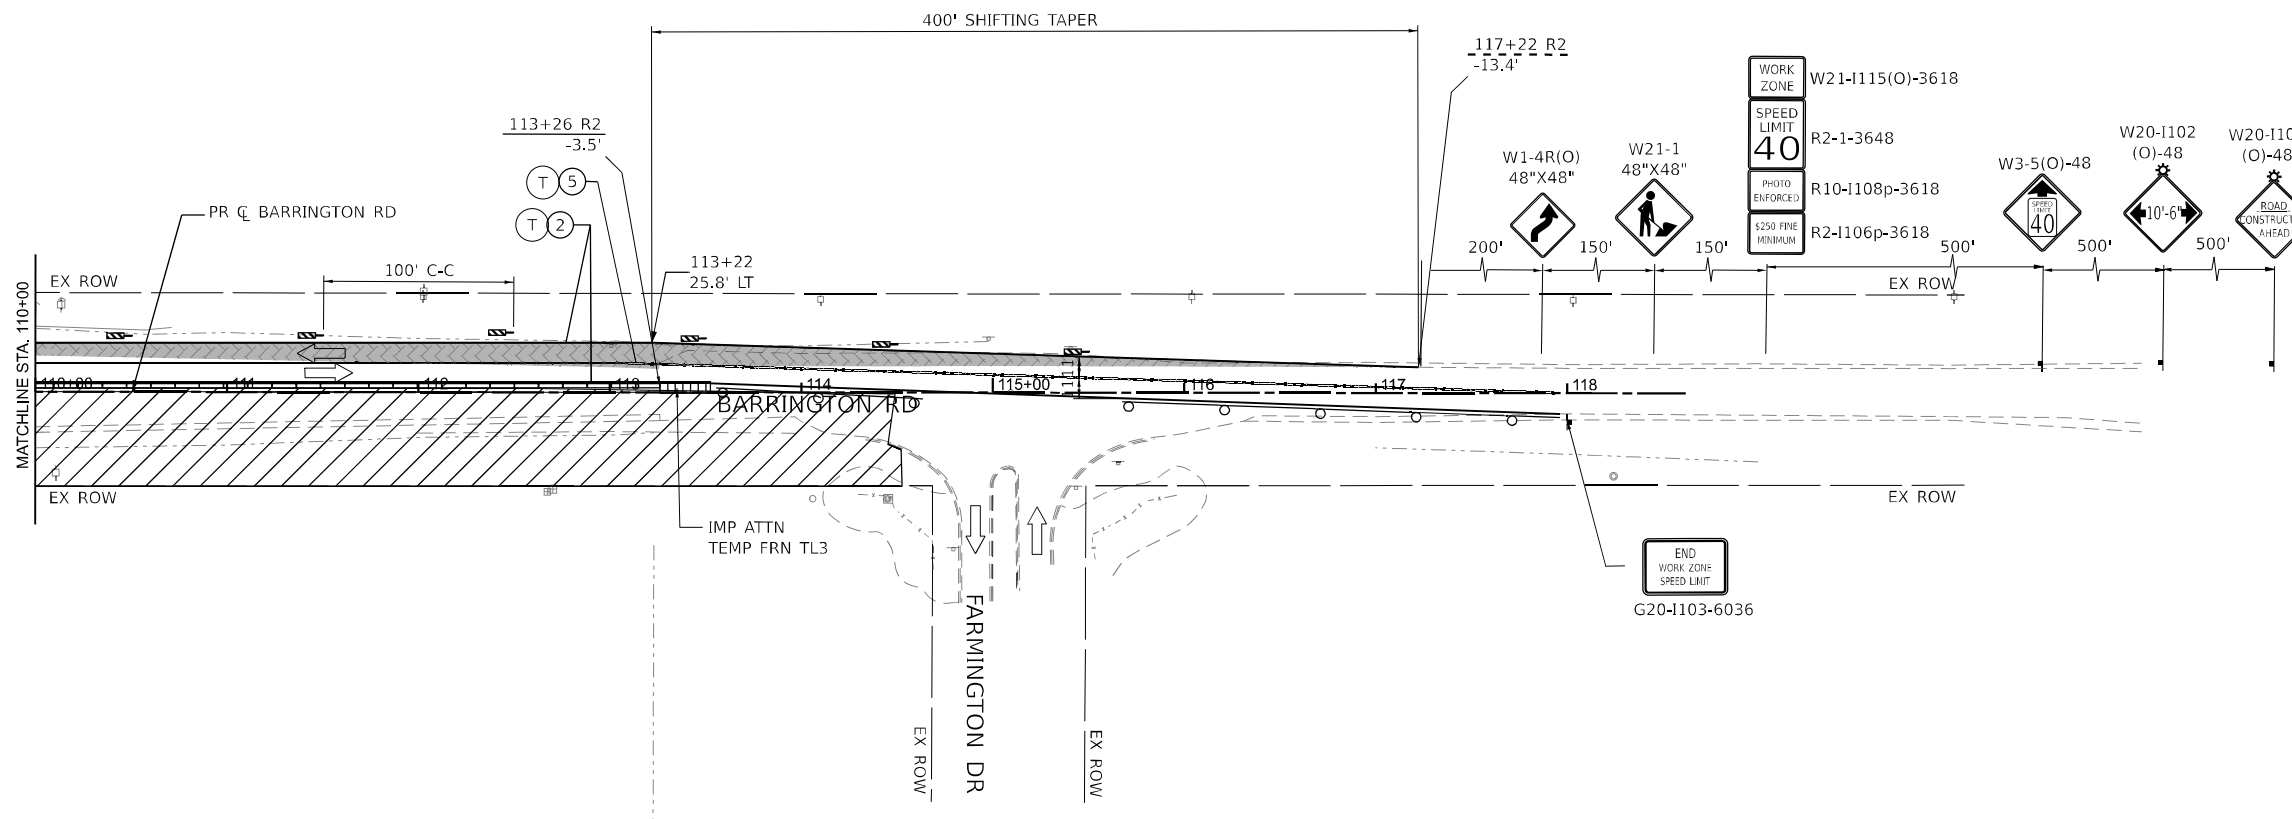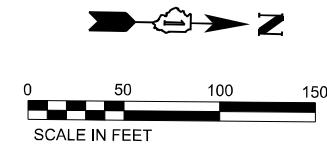

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	▬	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD




**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
BARRINGTON RD - STAGE 1

OSEH inc. <small>310 W. VAN BUREN ST. SUITE 300 CHICAGO, IL 60607 WWW.OSEHINC.COM</small>	USER NAME = AmulyaPusuluri	DESIGNED - _____	REVISED - _____
	PLOT SCALE = 100.245' / in.	CHECKED - _____	REVISED - _____
	PLOT DATE = 1/20/2026	DATE - _____	REVISED - _____

SCALE:	SHEET 34 OF 73 SHEETS	STA. 110+00 TO STA. 118+00	F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 117
							CONTRACT NO. 62K33
ILLINOIS FED. AID PROJECT							



MODEL: D:\file11... FILE NAME: ...

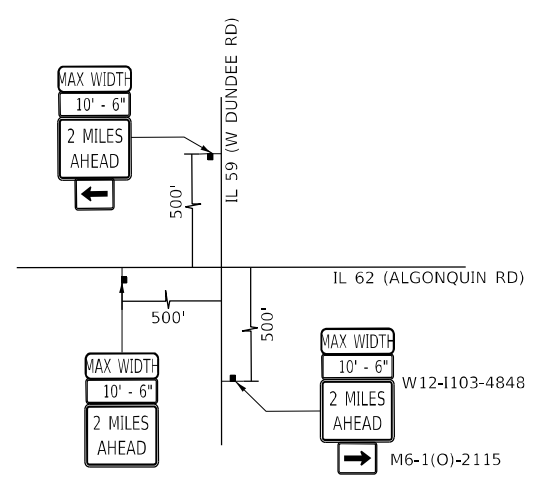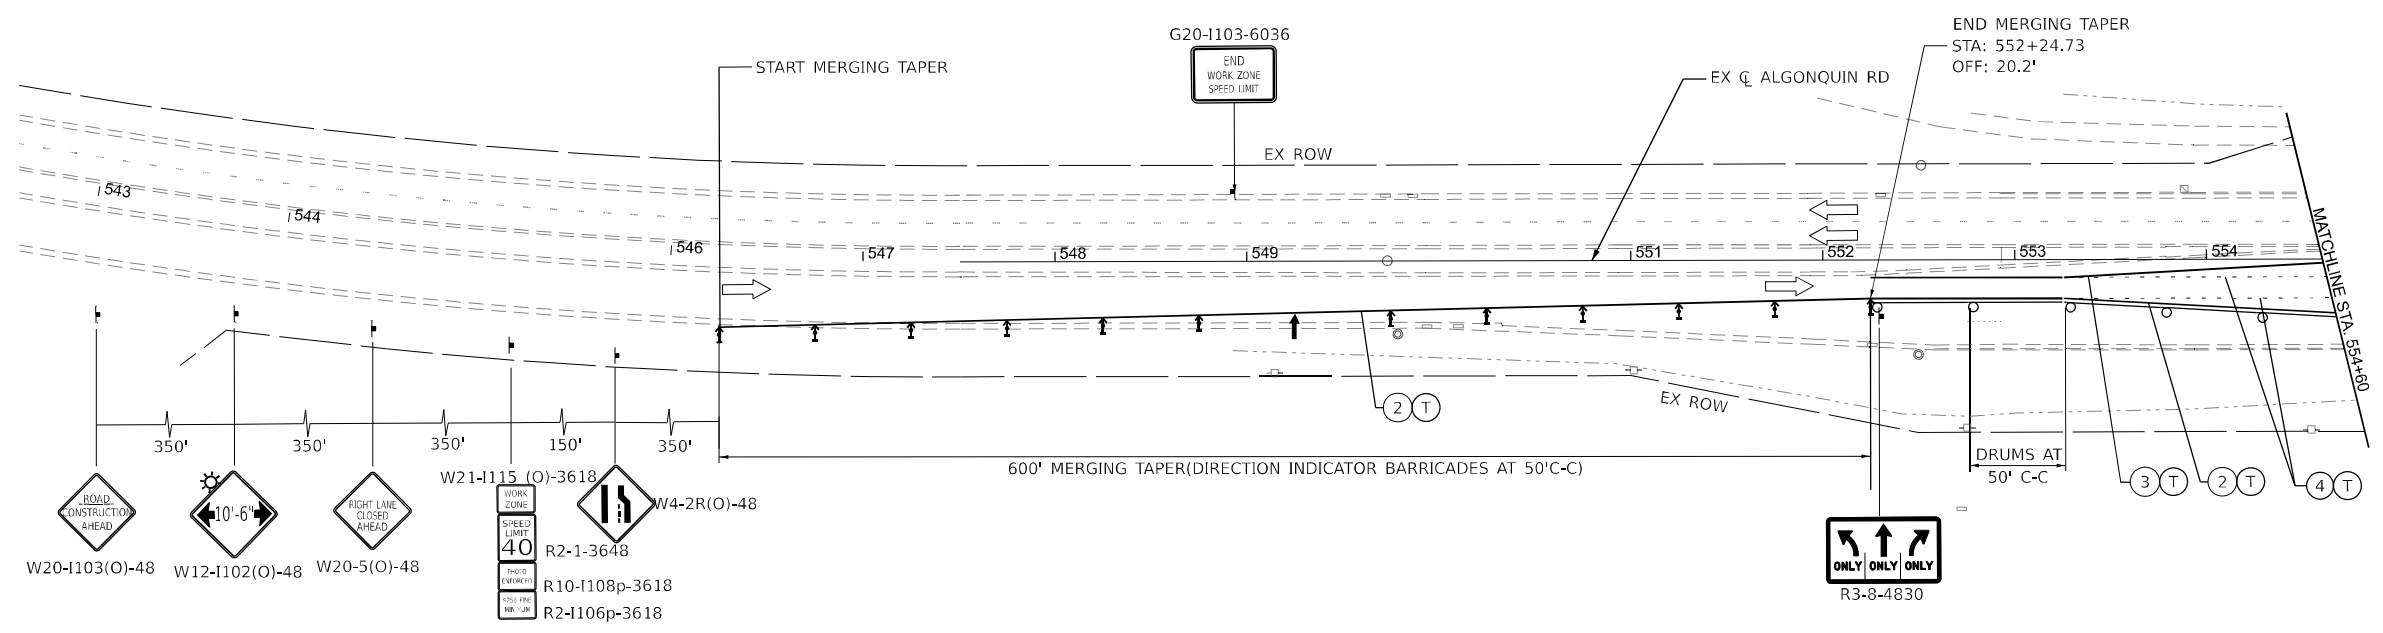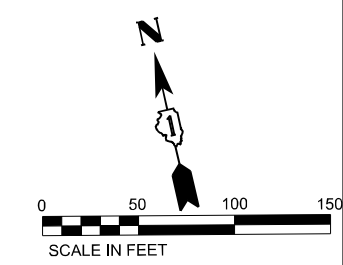

NOTE:
 ADVANCE MAXIMUM WIDTH RESTRICTION SIGNING SHALL REMAIN INSTALLED UNTIL THE COMPLETION OF STAGE 2

LEGEND	
①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE
②	PAVEMENT MARKING - LINE 4" - WHITE
③	PAVEMENT MARKING - LINE 4" - YELLOW
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C
⑥	PAVEMENT MARKING - LINE 6" - WHITE
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE
⑩	PAVEMENT MARKING - LINE 12" YELLOW
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE
P	TEMPORARY PAVEMENT MARKING - PAINT
↑	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE
■	COMPLETED PAVEMENT
▨	WORK AREA
▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
▤	IMPACT ATTENUATOR
↑↑	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
▬▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
↑	PROPOSED SIGN POST
—	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
▬	TEMPORARY CONCRETE BARRIER
←	TRAFFIC DIRECTION ARROW
↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
↑	ARROW BOARD

MODEL: D:\in\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: 11

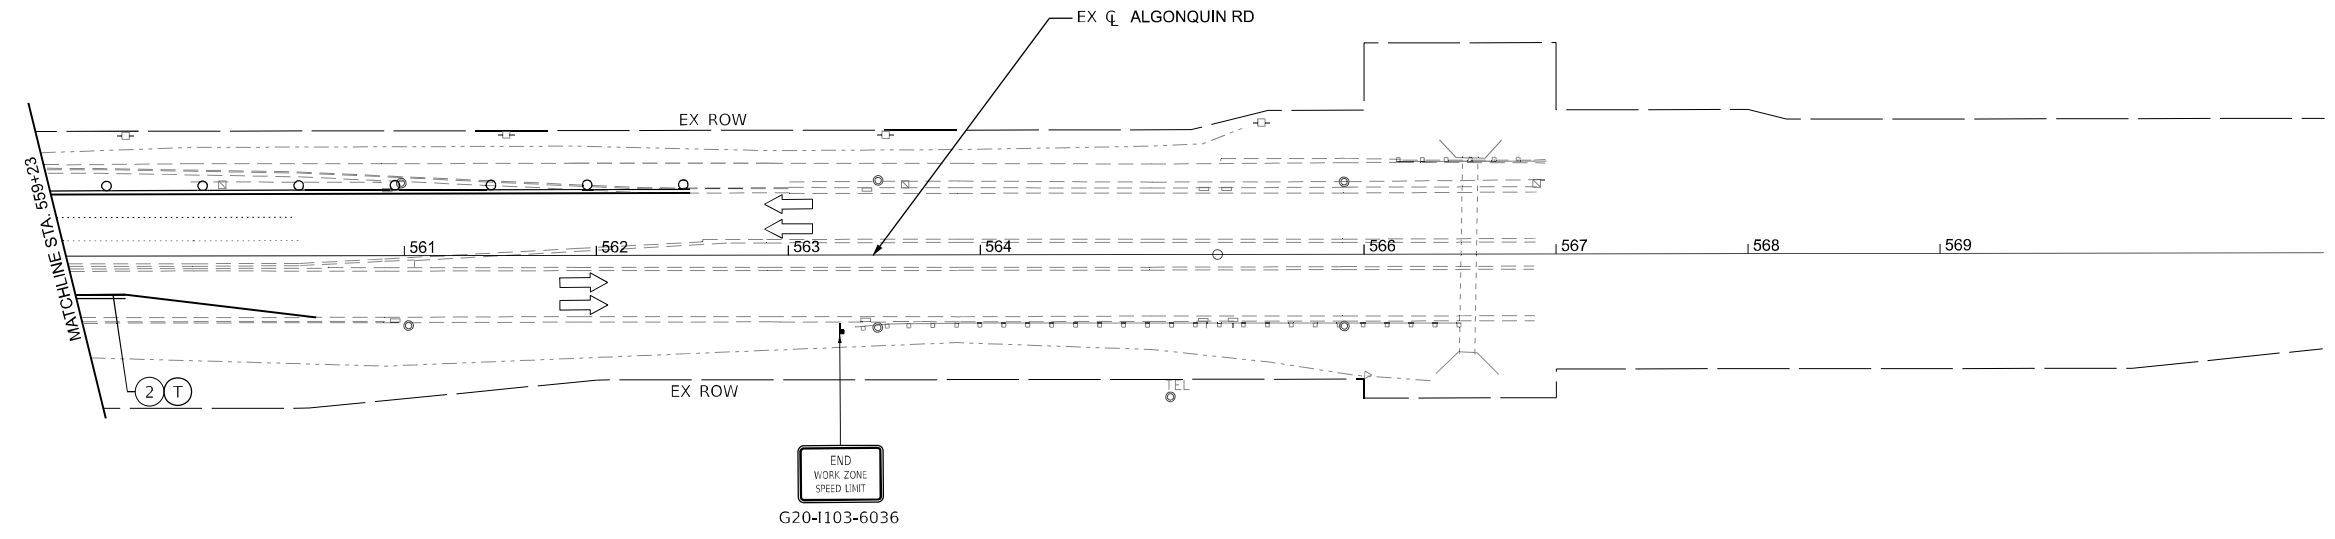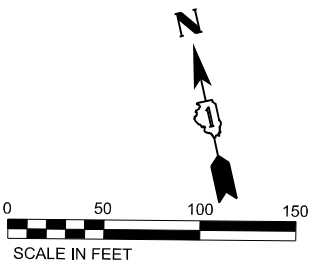

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩▩▩▩	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▨▨	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
↑	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: 12





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
DRAWN - ML	CHECKED - MM	REVISED - _____
PLOT SCALE = 99.996' / in.	DATE - 01/21/2026	REVISED - _____
PLOT DATE = 1/20/2026		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC ALGONQUIN RD - STAGE 1			
SCALE:	SHEET 36 OF 73 SHEETS	STA.	TO STA.

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 119
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

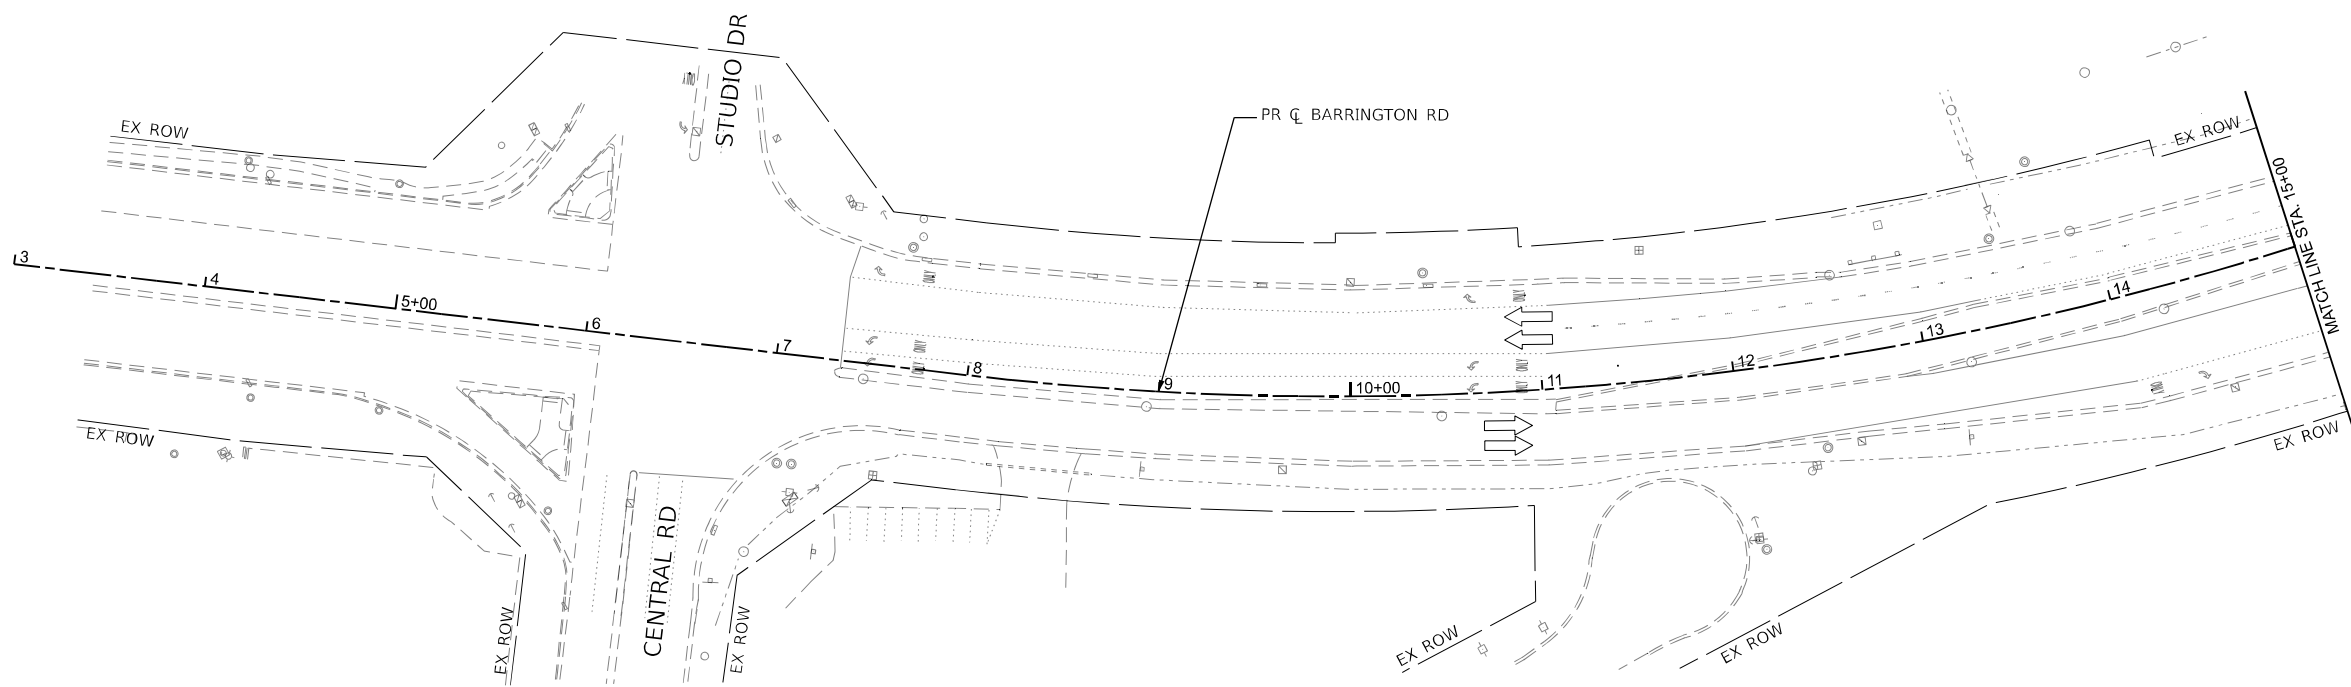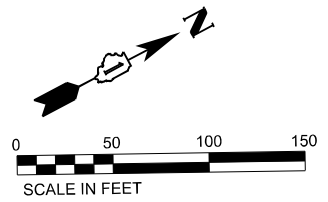

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▨ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▨ TEMPORARY CONCRETE BARRIER
Ⓣ TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡ TRAFFIC DIRECTION ARROW
Ⓟ TEMPORARY PAVEMENT MARKING - PAINT	↑ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD

MODEL: D:\info...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISIONS -	
PLOT SCALE = 99.996' / in.	CHECKED - MM	REVISIONS -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISIONS -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 1A
 SCALE: SHEET 37 OF 73 SHEETS STA. 3+00 TO STA.15+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 120
ILLINOIS FED. AID PROJECT				CONTRACT NO. 62K33

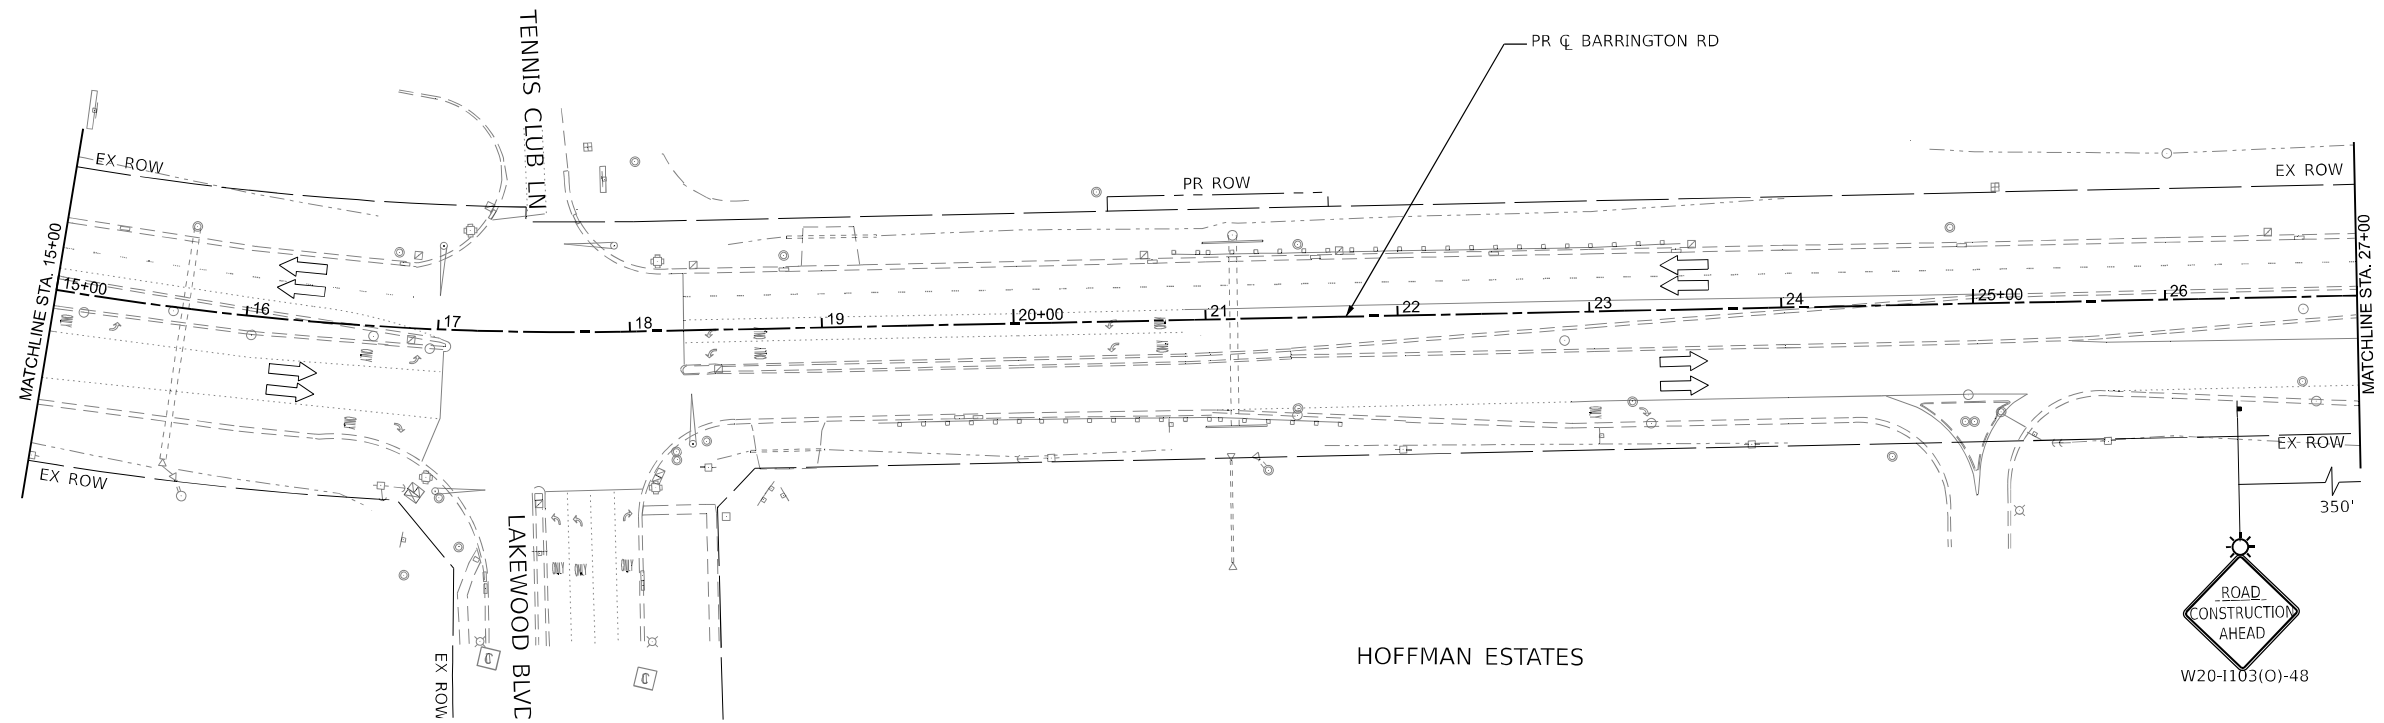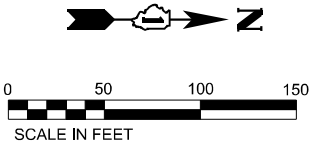

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▬ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚓ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⊕ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADI)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▬ TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔ TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	↑ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
BARRINGTON RD - STAGE 1A



SCALE: SHEET 38 OF 73 SHEETS STA. 15+00 TO STA. 27+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	121
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

OSEH inc.
513 W. VAN BUREN ST.
SUITE 200
CHICAGO, IL 60607
WWW.OSEHINC.COM

USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
PLOT SCALE = 99.996' / in.	DRAWN - ML	REVISED -
PLOT DATE = 1/20/2026	CHECKED - MM	REVISED -
	DATE - 01/21/2026	REVISED -

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...

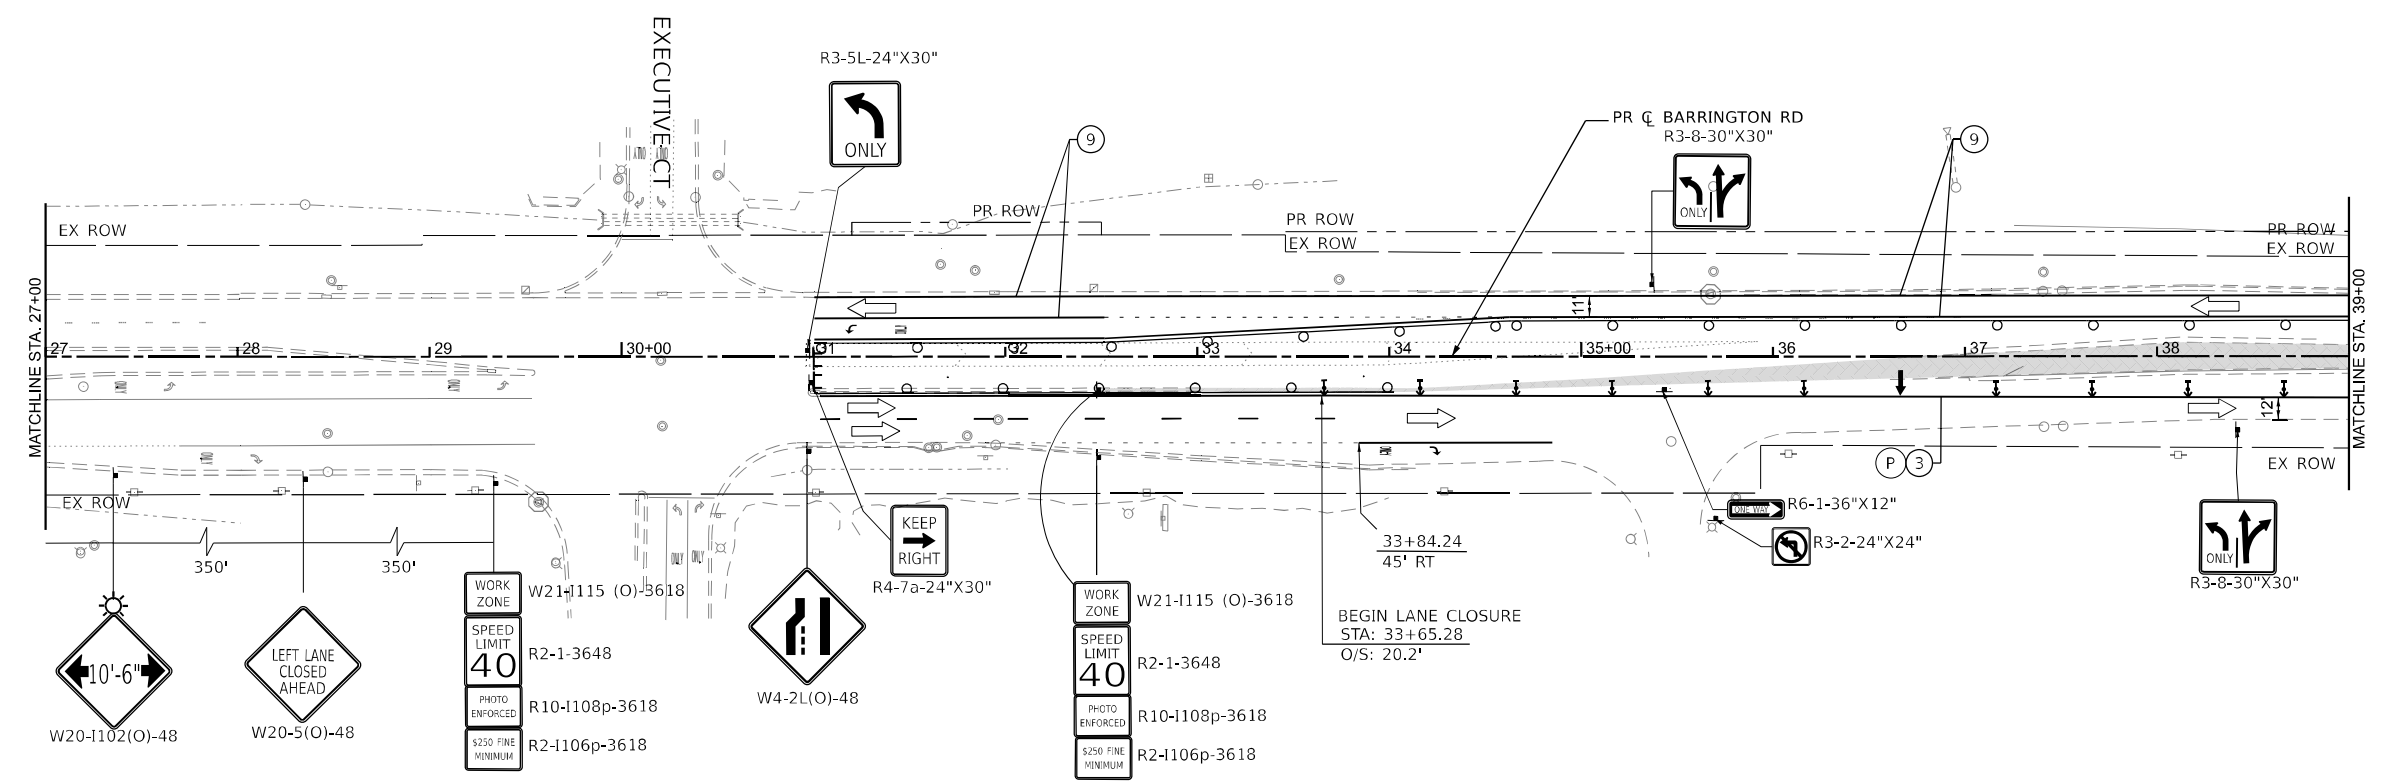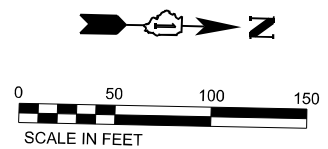

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⦿	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISIONS -	
PLOT SCALE = 99.998' / in.	CHECKED - MM	REVISIONS -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISIONS -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 1A
 SCALE: SHEET 39 OF 73 SHEETS STA. 27+00 TO STA. 39+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 122
CONTRACT NO. 62K33				ILLINOIS FED. AID PROJECT

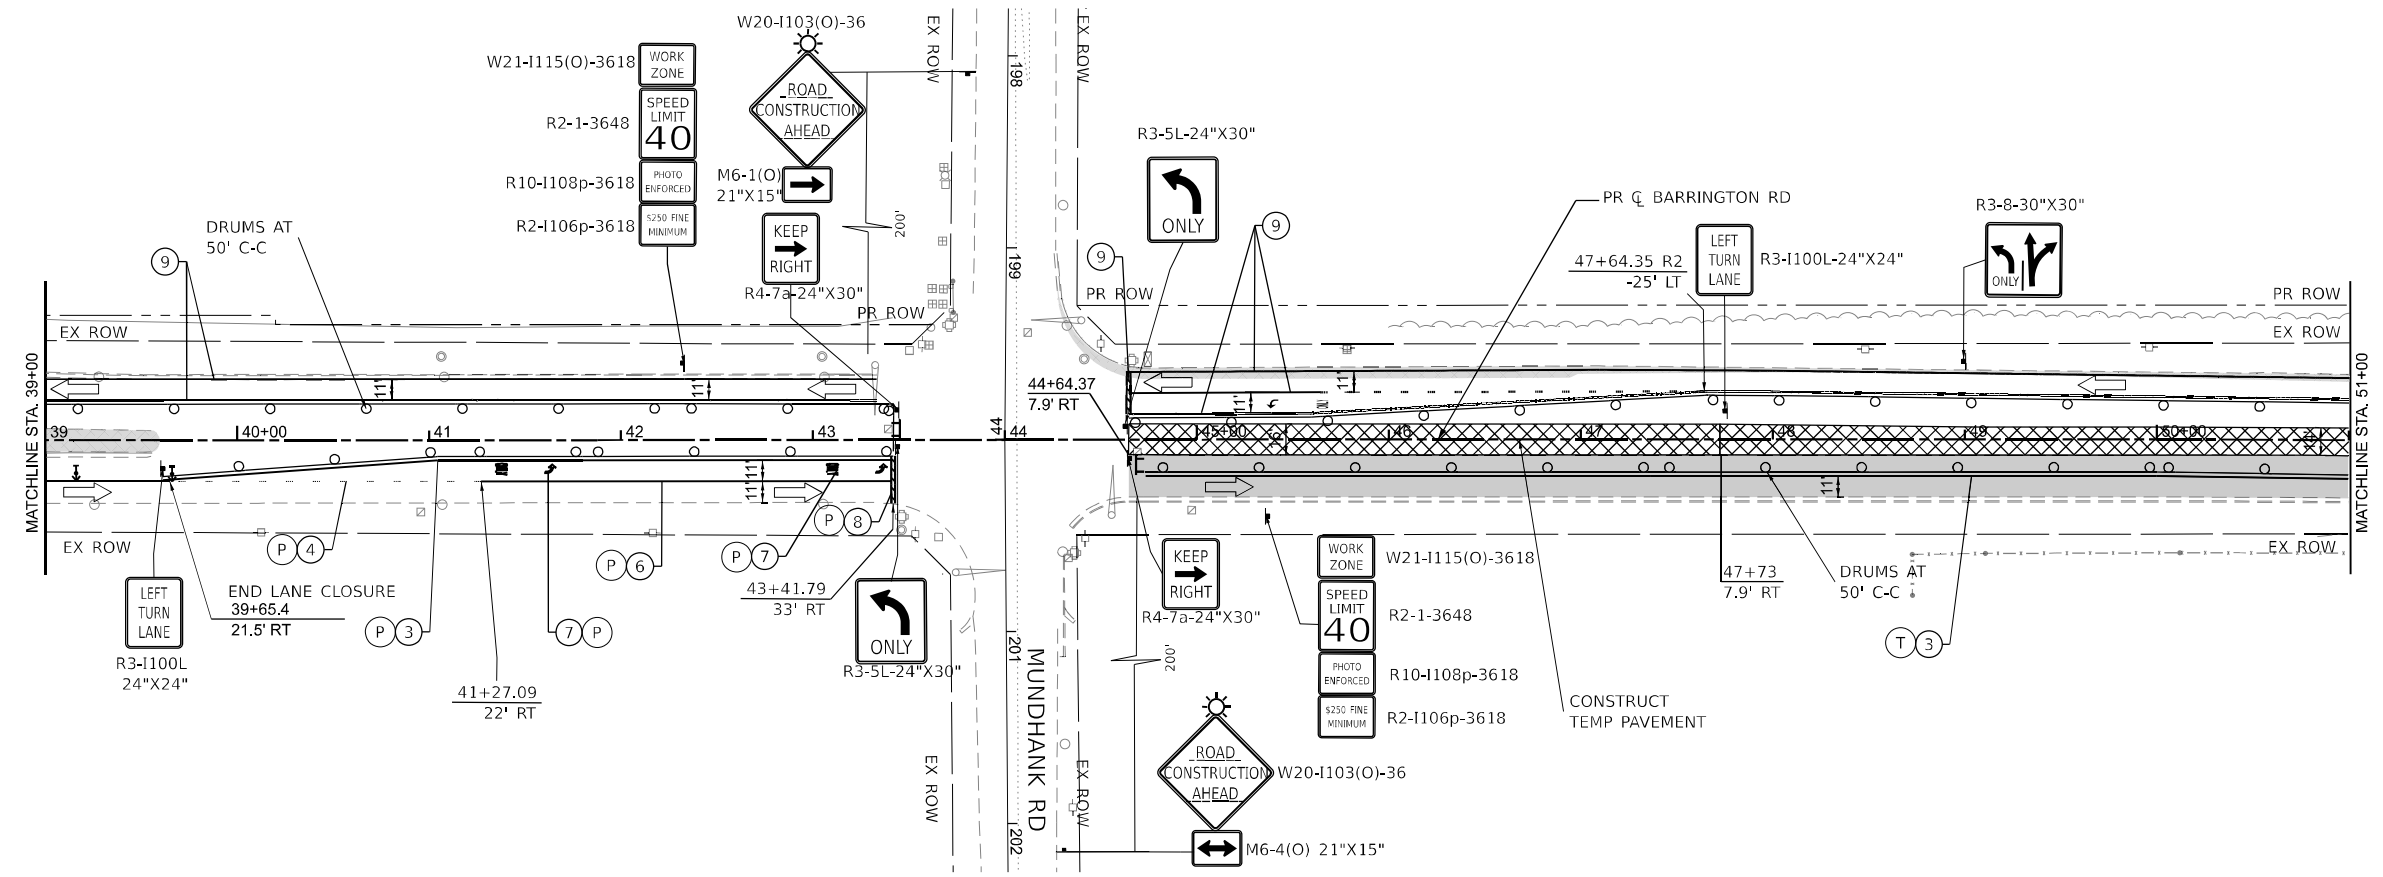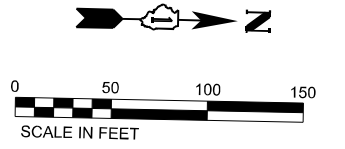

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	⚡	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\infra\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...



	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	DRAWN - ML 3	CHECKED - MM	REVISED - _____
	PLOT SCALE = 99.998' / in.	DATE - 01/21/2026	REVISED - _____
	PLOT DATE = 1/20/2026		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 1A

SCALE: SHEET 40 OF 73 SHEETS STA. 39+00 TO STA. 51+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 123
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

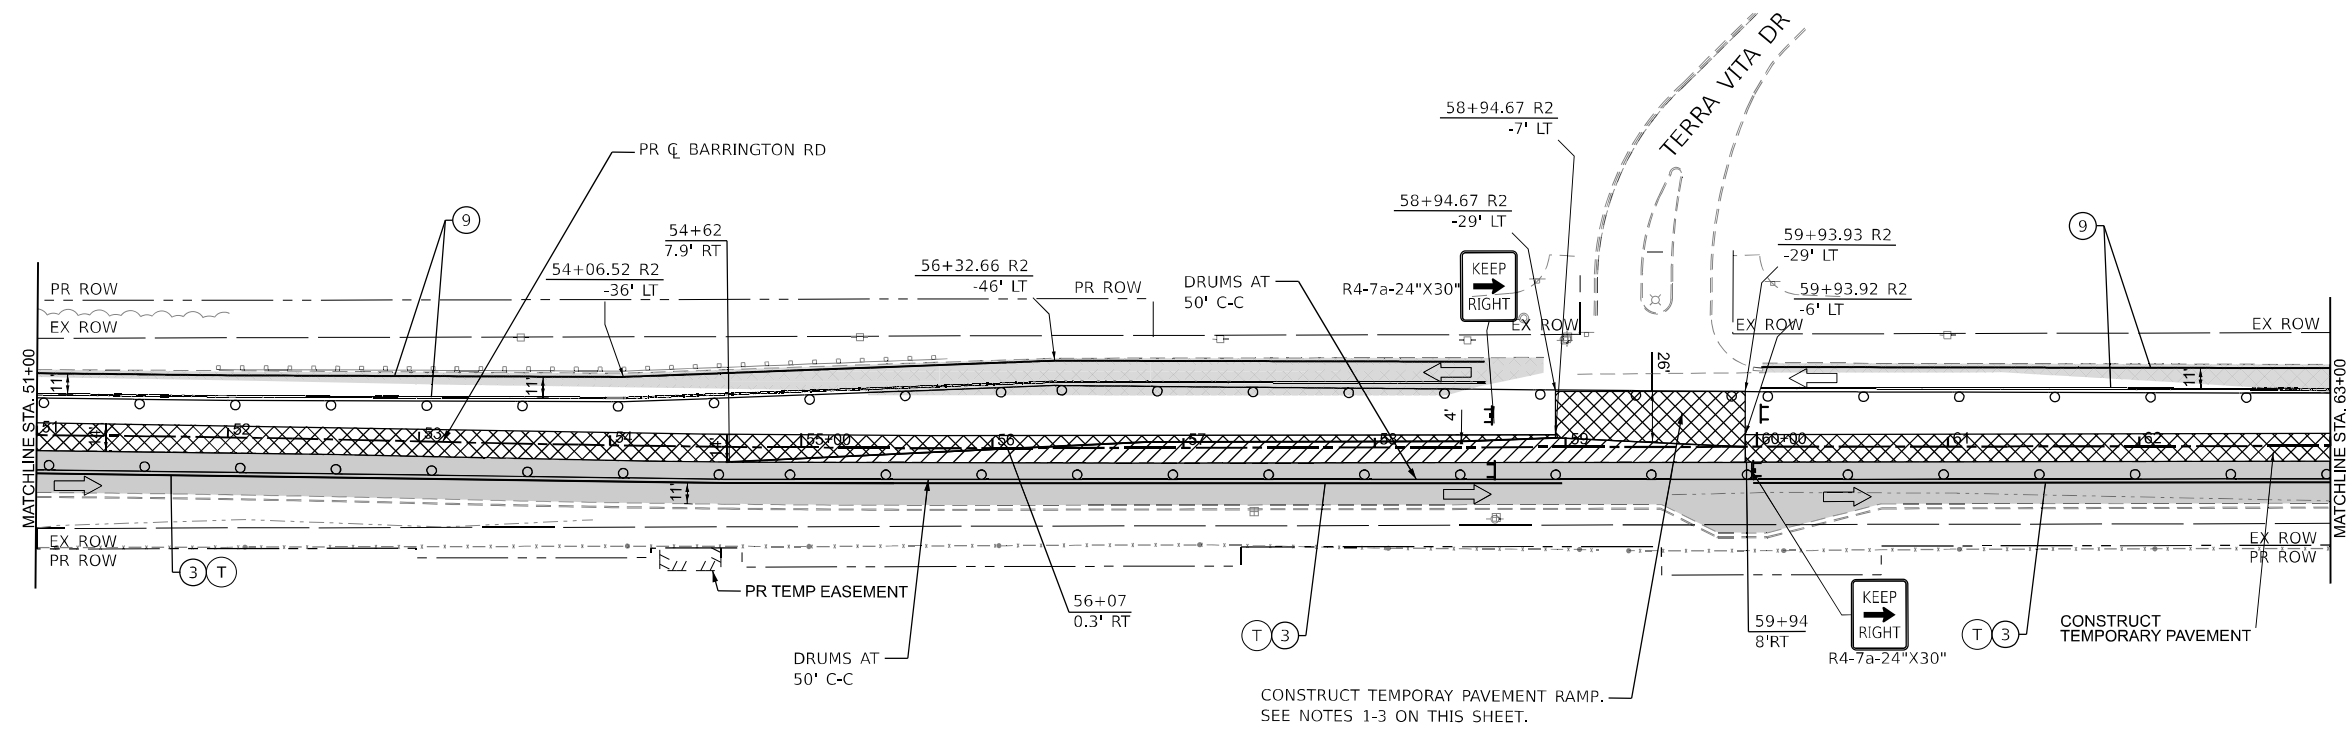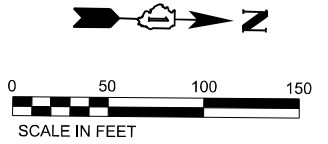

NOTES:

1. CONSTRUCT TEMPORARY PAVEMENT RAMP AT THE INTERSECTION OF TERRA VITAE INTERSECTION PRIOR TO CONSTRUCTION OF TEMPORARY PAVEMENT ALONG BARRINGTON ROAD IN THIS STAGE.
2. CLOSE LEFT TURN MOVEMENT FROM NORTHBOUND BARRINGTON ROAD AND LEFT TURN MOVEMENT FROM TERRA VITAE UNTIL THE CONSTRUCTION OF TEMPORARY PAVEMENT RAMP AT THIS INTERSECTION.
3. OPEN THE LEFT TURN MOVEMENT AFTER THE CONSTRUCTION OF TEMPORARY PAVEMENT RAMP.

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD



MODEL: Default
 FILE NAME: I:\projects\2020\CH4014012001\80CAD\02 - Sheets\80-MOT\Stage 1AD162K33_MOT_Sheet 5

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	PLOT SCALE = 100.418 * / in.	DRAWN - ML	REVISED - _____
	PLOT DATE = 1/20/2026	CHECKED - MM	REVISED - _____
		DATE - 01/21/2026	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 1A	
SCALE:	SHEET 41 OF 73 SHEETS STA. 51+00 TO STA. 63+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 124
ILLINOIS FED. AID PROJECT			CONTRACT NO. 62K33	

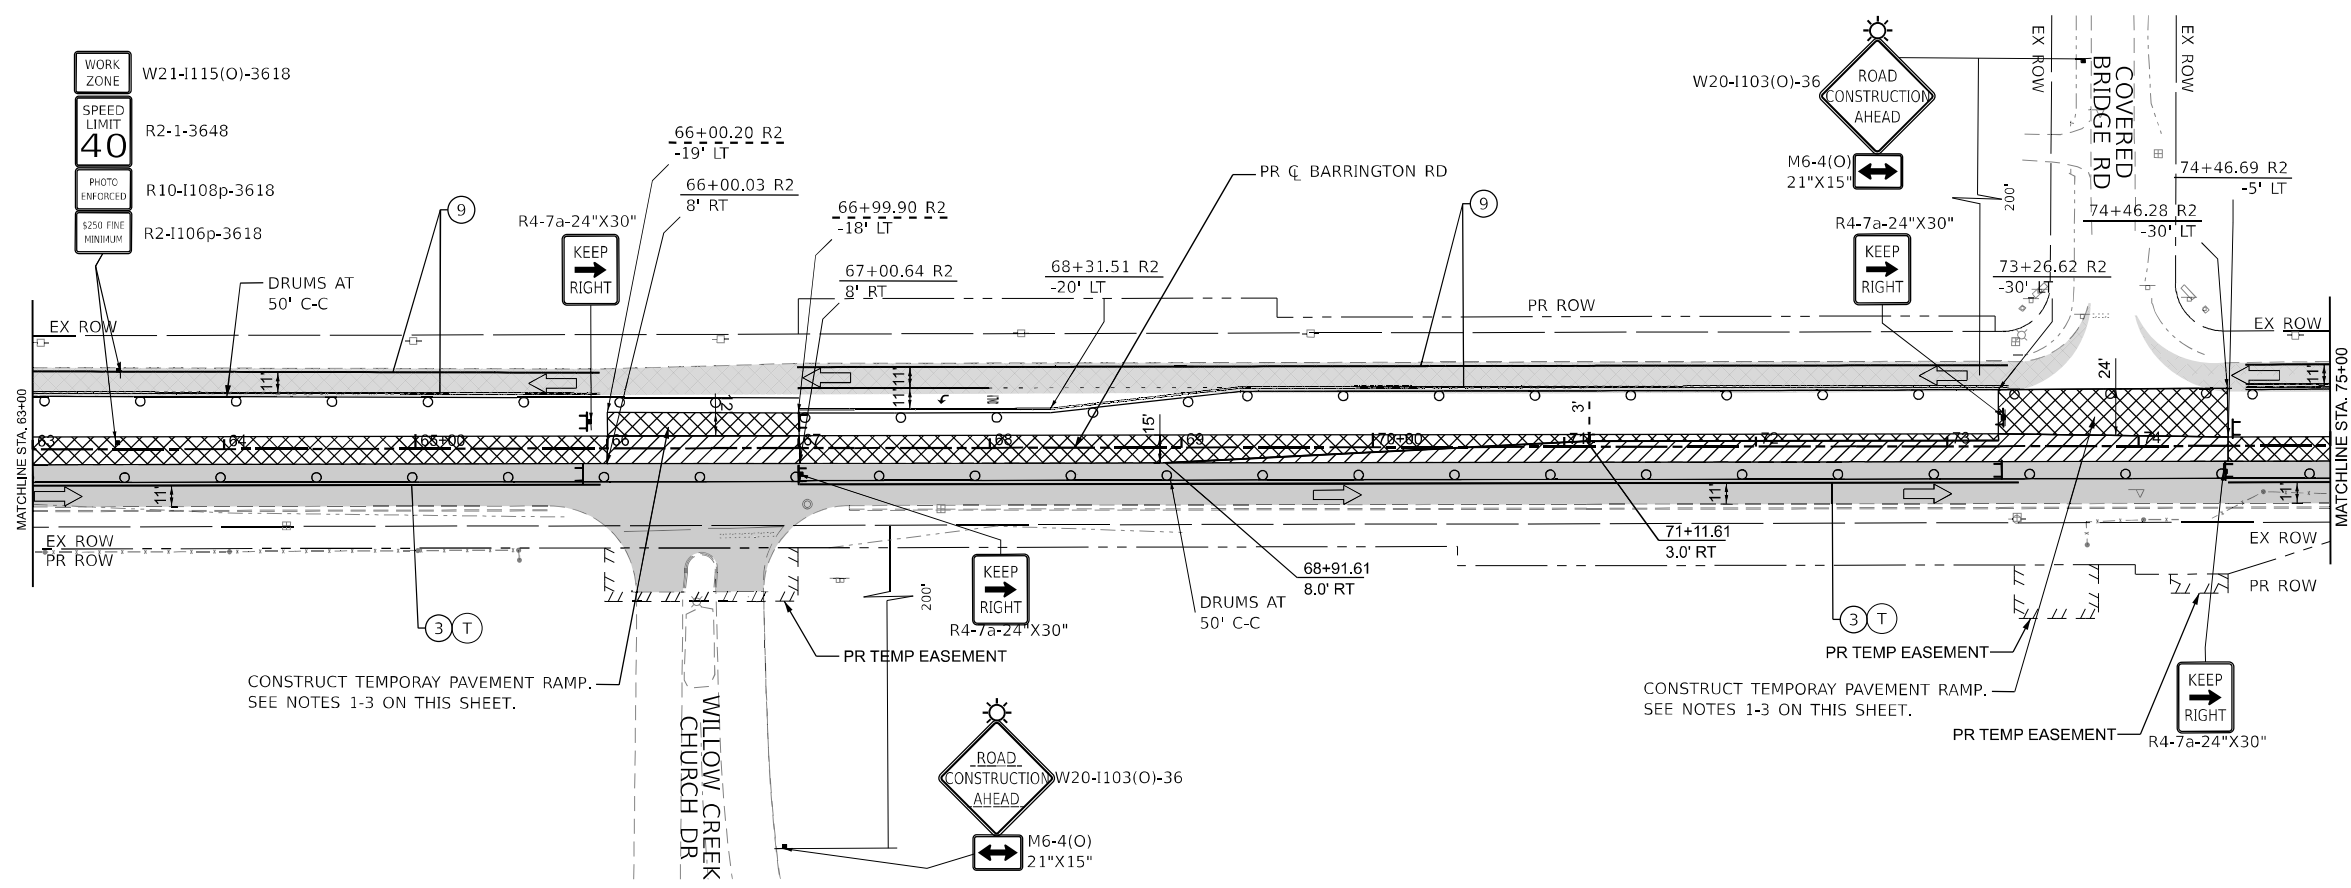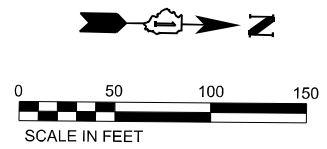



- NOTES:**
1. CONSTRUCT PROPOSED INTERSECTION PAVEMENT AND TEMPORARY PAVEMENT RAMP AT THE INTERSECTION OF WILLOW CREEK CHURCH ROAD AND COVERED BRIDGE ROAD INTERSECTION PRIOR TO CONSTRUCTION OF TEMPORARY PAVEMENT ALONG BARRINGTON ROAD IN THIS STAGE.
 2. CLOSE LEFT TURN MOVEMENT FROM NORTHBOUND BARRINGTON ROAD AND LEFT TURN MOVEMENT FROM COVERED BRIDGE ROAD UNTIL THE CONSTRUCTION OF TEMPORARY PAVEMENT RAMP AT THIS INTERSECTION. THE AMOUNT OF CLOSURE SHALL BE LIMITED TO MAXIMUM OF 7 DAYS AT EACH LOCATION.
 3. OPEN THE LEFT TURN MOVEMENT AFTER THE CONSTRUCTION OF PROPOSED INTERSECTION PAVEMENT AND TEMPORARY PAVEMENT RAMP.

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\edit\... FILE NAME: ... SHEET: 08-40718-Stage 1A-D-62K33_MOT_Sheet 6

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 1A	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED - _____			362	2019-161-W	COOK	666	125
	PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED - _____			CONTRACT NO. 62K33		ILLINOIS FED. AID PROJECT		

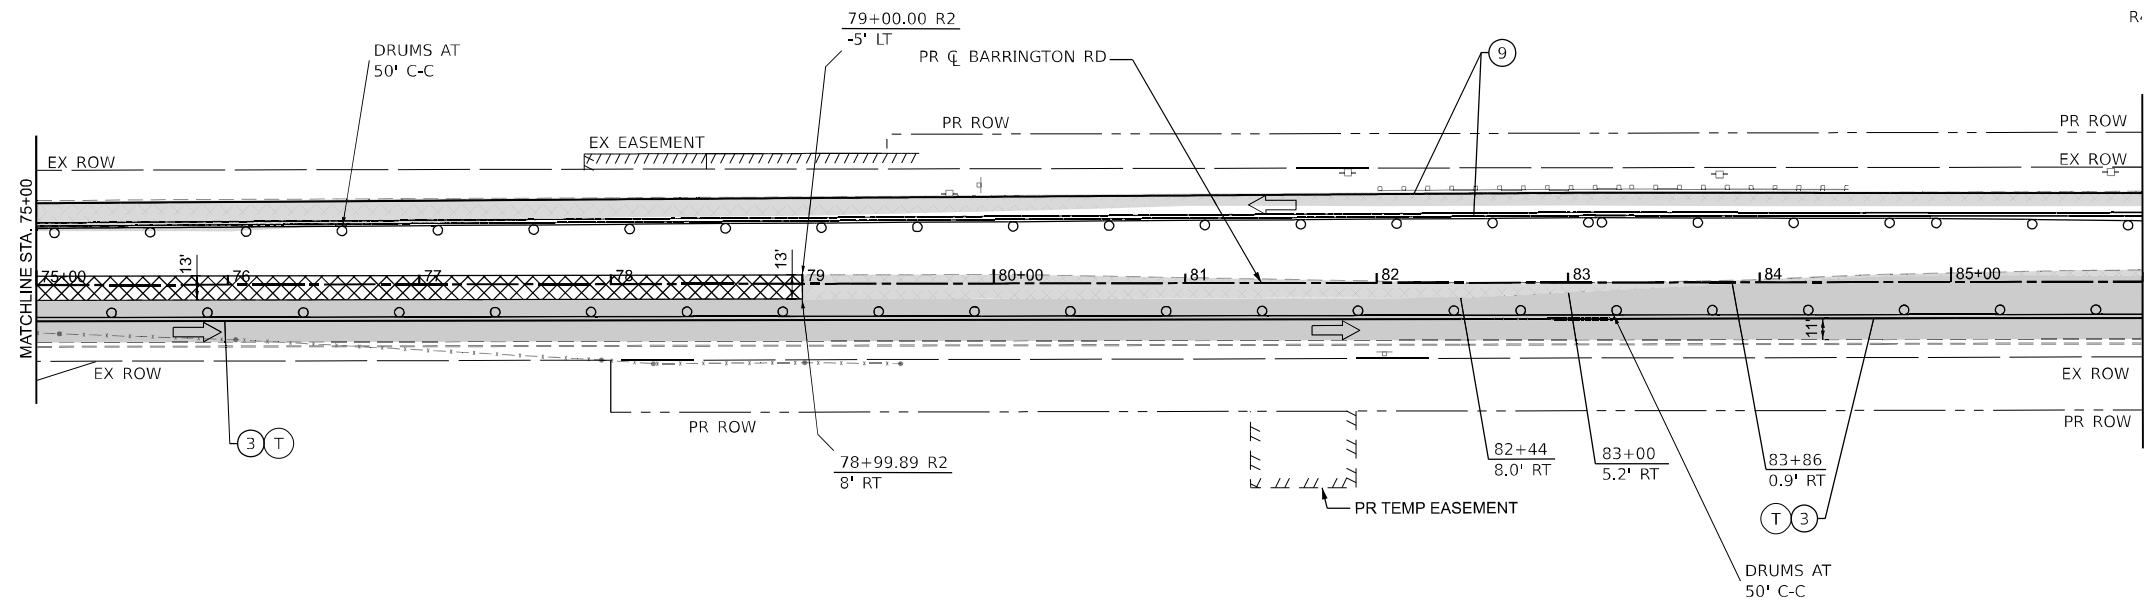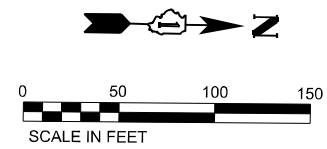

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚠	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file1...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...
 DATE: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	CHECKED - MM	DATE - 01/21/2026
PLOT SCALE = 100.245' / in.		
PLOT DATE = 1/20/2026		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 1A	
SCALE:	SHEET 43 OF 73 SHEETS STA. 75+00 TO STA. 86+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 126
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

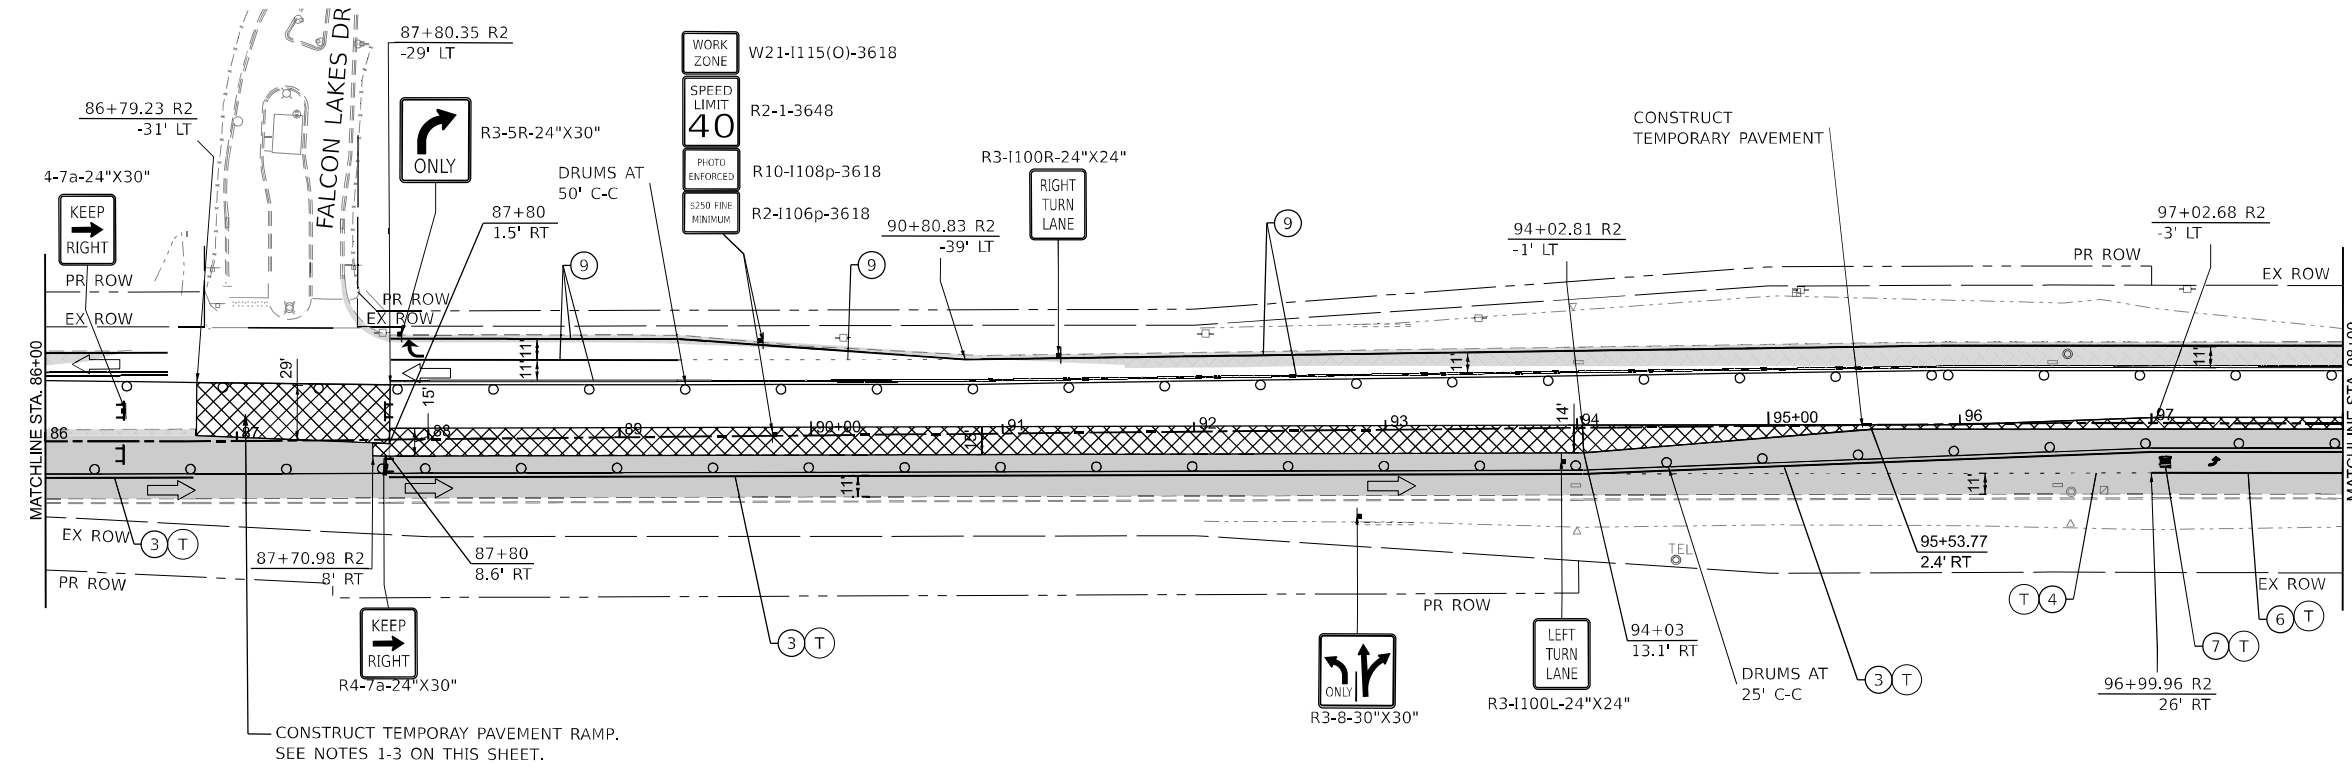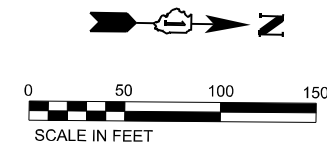

NOTES:

1. CONSTRUCT TEMPORARY PAVEMENT RAMP AT THE OF FALCON LAKES DRIVE INTERSECTION PRIOR TO CONSTRUCTION OF TEMPORARY PAVEMENT ALONG BARRINGTON ROAD IN THIS STAGE.
2. CLOSE LEFT TURN MOVEMENT FROM NORTHBOUND BARRINGTON ROAD AND LEFT TURN MOVEMENT FROM FALCON LAKES DRIVE DURING THIS STAGE.

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE		COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE		WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW		TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE		TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C		IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE		TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS		DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR		PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE		CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW		TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE		TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT		DIRECTION INDICATOR BARRICADE @ 50' C-C
I	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE		ARROW BOARD

MODEL: D:\file11... FILE NAME: ... SHEETS: 08-07-18 Page 14-D-16233_MOT_Sheet 8



OSEH inc.
 110 W. VAN BUREN ST.
 SUITE 200
 CHICAGO, IL 60607
 WWW.OSEH.COM

USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISIONS -	
PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 1A
 SCALE: SHEET 44 OF 73 SHEETS STA. 86+00 TO STA. 98+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	127
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

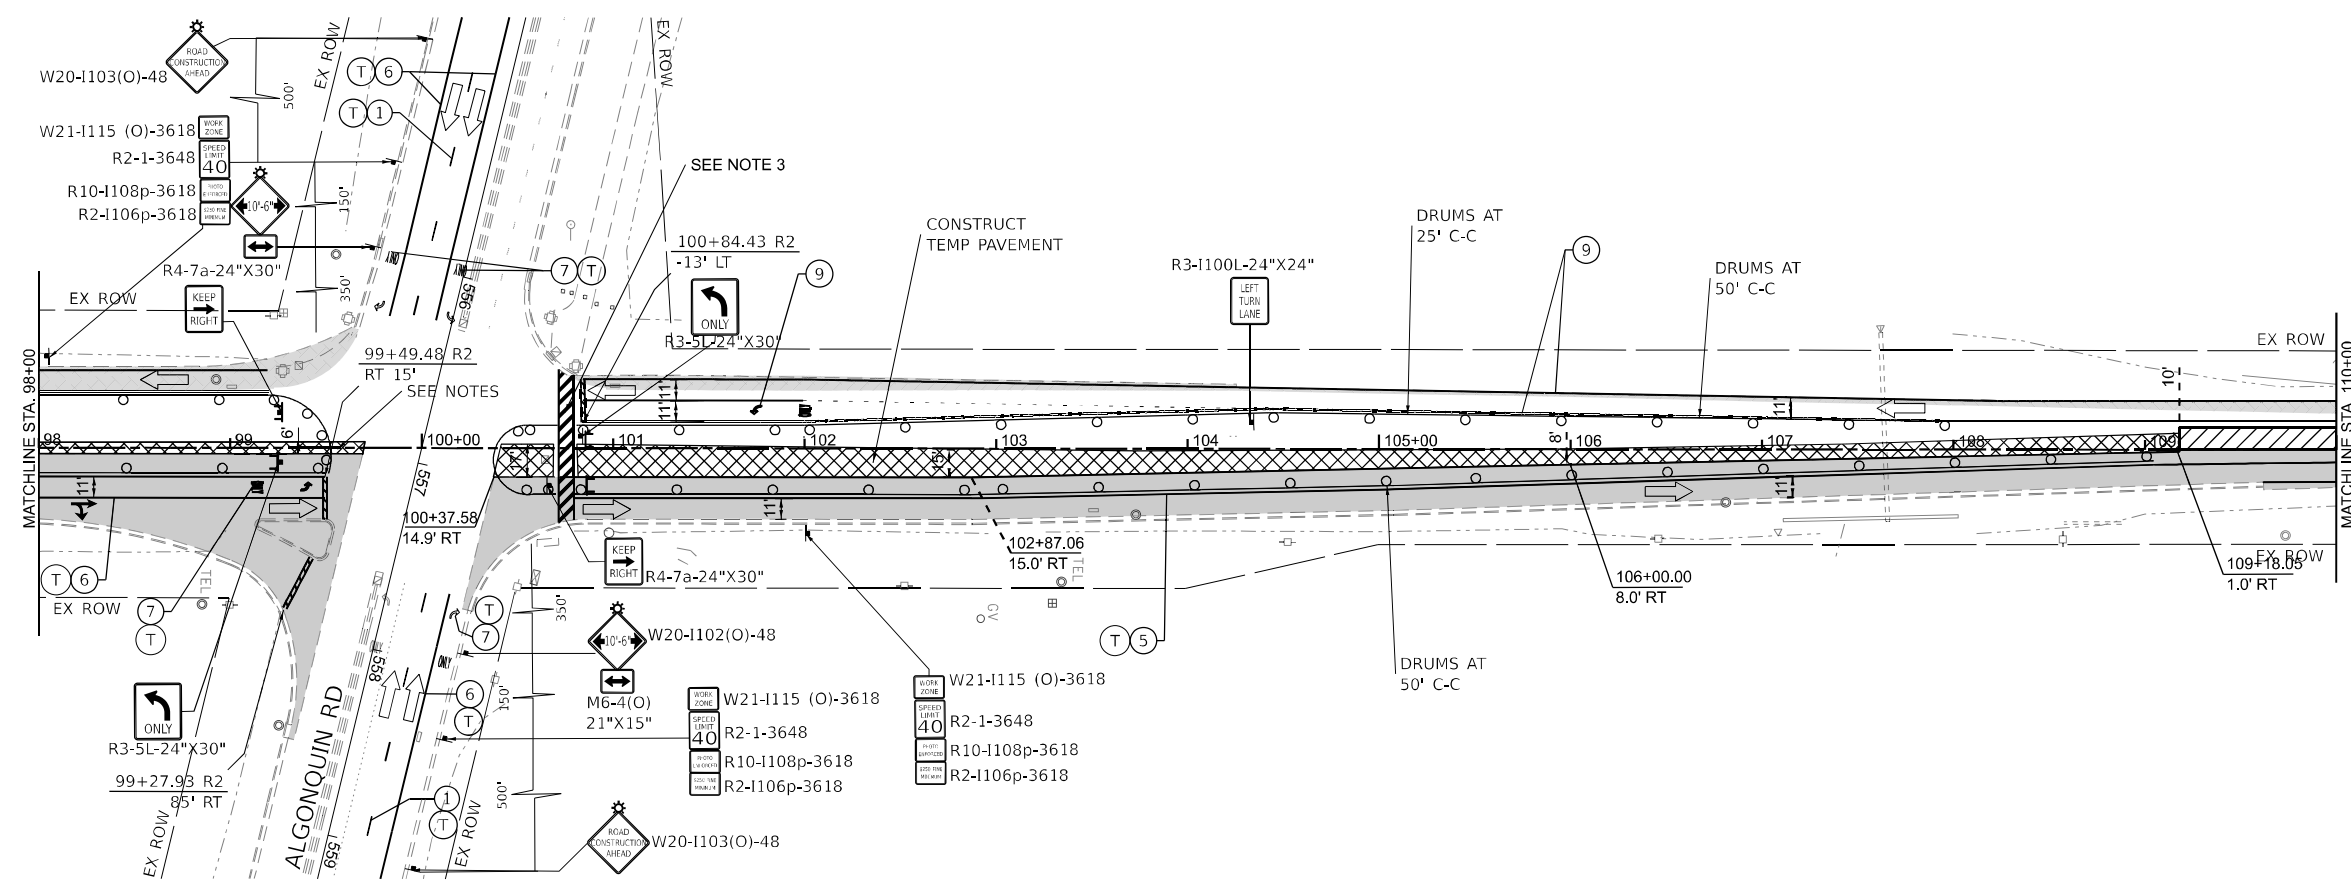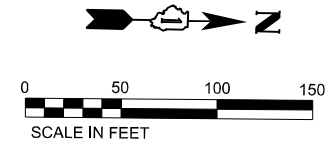

NOTES:



1. LANE CLOSURE, STAGING AND TRAFFIC CONTROL ALONG ALGONQUIN ROAD IS REQUIRED WHEN THE CONTRACTOR IS WORKING WITHIN 50' OF THE INTERSECTION.
2. CONTRACTOR SHALL MAINTAIN NORMAL TRAFFIC PATTERN ALONG ALGONQUIN ROAD AS SOON AS THE WORK IS COMPLETED IN THE VICINITY OF INTERSECTION.
3. CONTRACTOR SHALL MAINTAIN ACCESS TO PEDESTRIANS AND BIKES THRU THE INTERSECTION AT ALL TIMES DURING CONSTRUCTION.
4. WHEN CONSTRUCTING THE TEMPORARY PAVEMENT WITHIN 50 FEET OF THE INTERSECTION CONTRACTOR SHALL CLOSE LANE 2 ALGONQUIN RD WB TRAFFIC UTILIZING TEMPORARY LANE CLOSURE DURING THE ALLOWABLE HOURS LISTED IN "KEEPING ARTERIAL ROADWAYS OPEN TO TRAFFIC (LANE CLOSURES ONLY)(D-1)" SPECIAL PROVISION.

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▩ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▩ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▩ TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡ TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	↑ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD

MODEL: D:\file1... FILE NAME: ... 2020\04\01... 1401200101810102 - Sheets\08-07\Stage 1\AD165233_MOT_Sheet 9

	USER NAME = AmulyaPusuturi	DESIGNED - AP	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 1A	F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 128		
	PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED - _____			SCALE: SHEET 46 OF 73 SHEETS	STA. 98+00 TO STA. 110+00	CONTRACT NO. 62K33				
	PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED - _____			ILLINOIS FED. AID PROJECT						

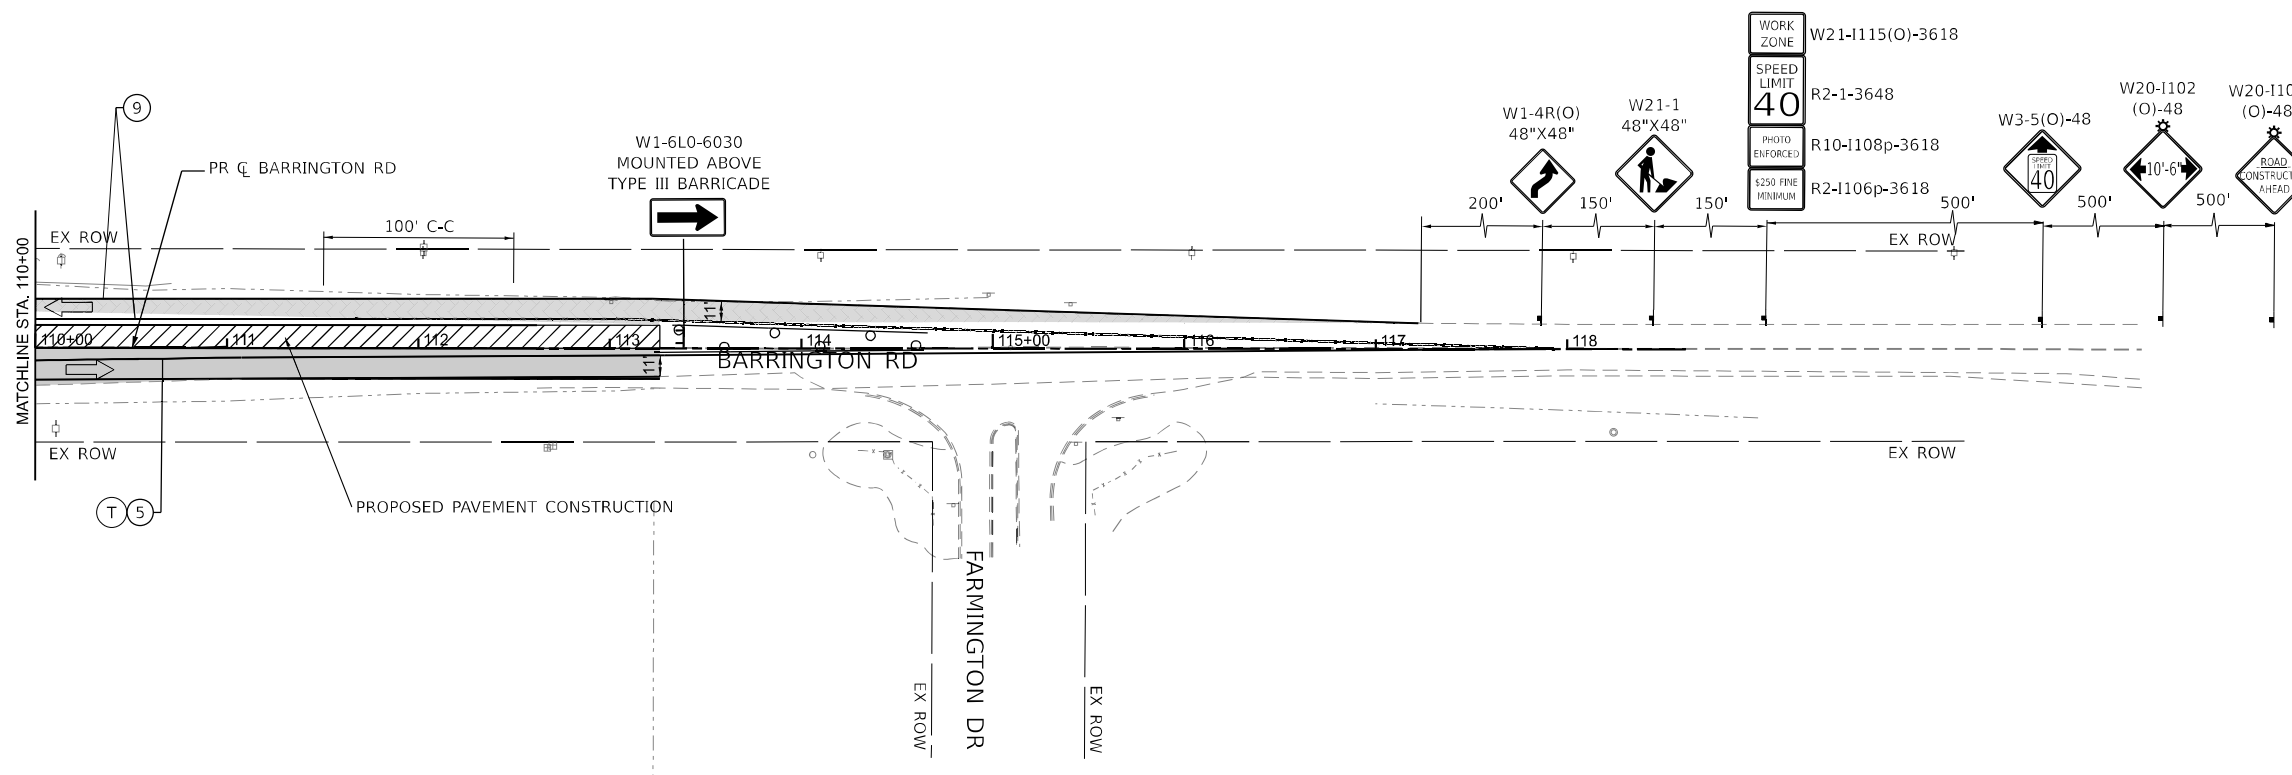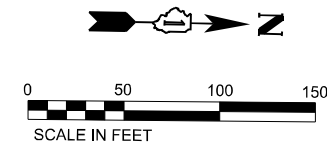

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▬ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▬ TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	← TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	↑ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD

OSEH inc.
312 W. VAN BUREN ST.
 SUITE 200
 CHICAGO, IL 60607
 WWW.OSEHINC.COM

USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
DRAWN - ML	CHECKED - MM	REVISED - _____
PLOT SCALE = 100.245' / in.	DATE - 01/21/2026	REVISED - _____
PLOT DATE = 1/20/2026		



**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 1A

SCALE: SHEET 46 OF 73 SHEETS STA.110+00 TO STA.118+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	129
				CONTRACT NO. 62K33
ILLINOIS FED. AID PROJECT				

MODEL: D:\file11\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...
 DATE: ...

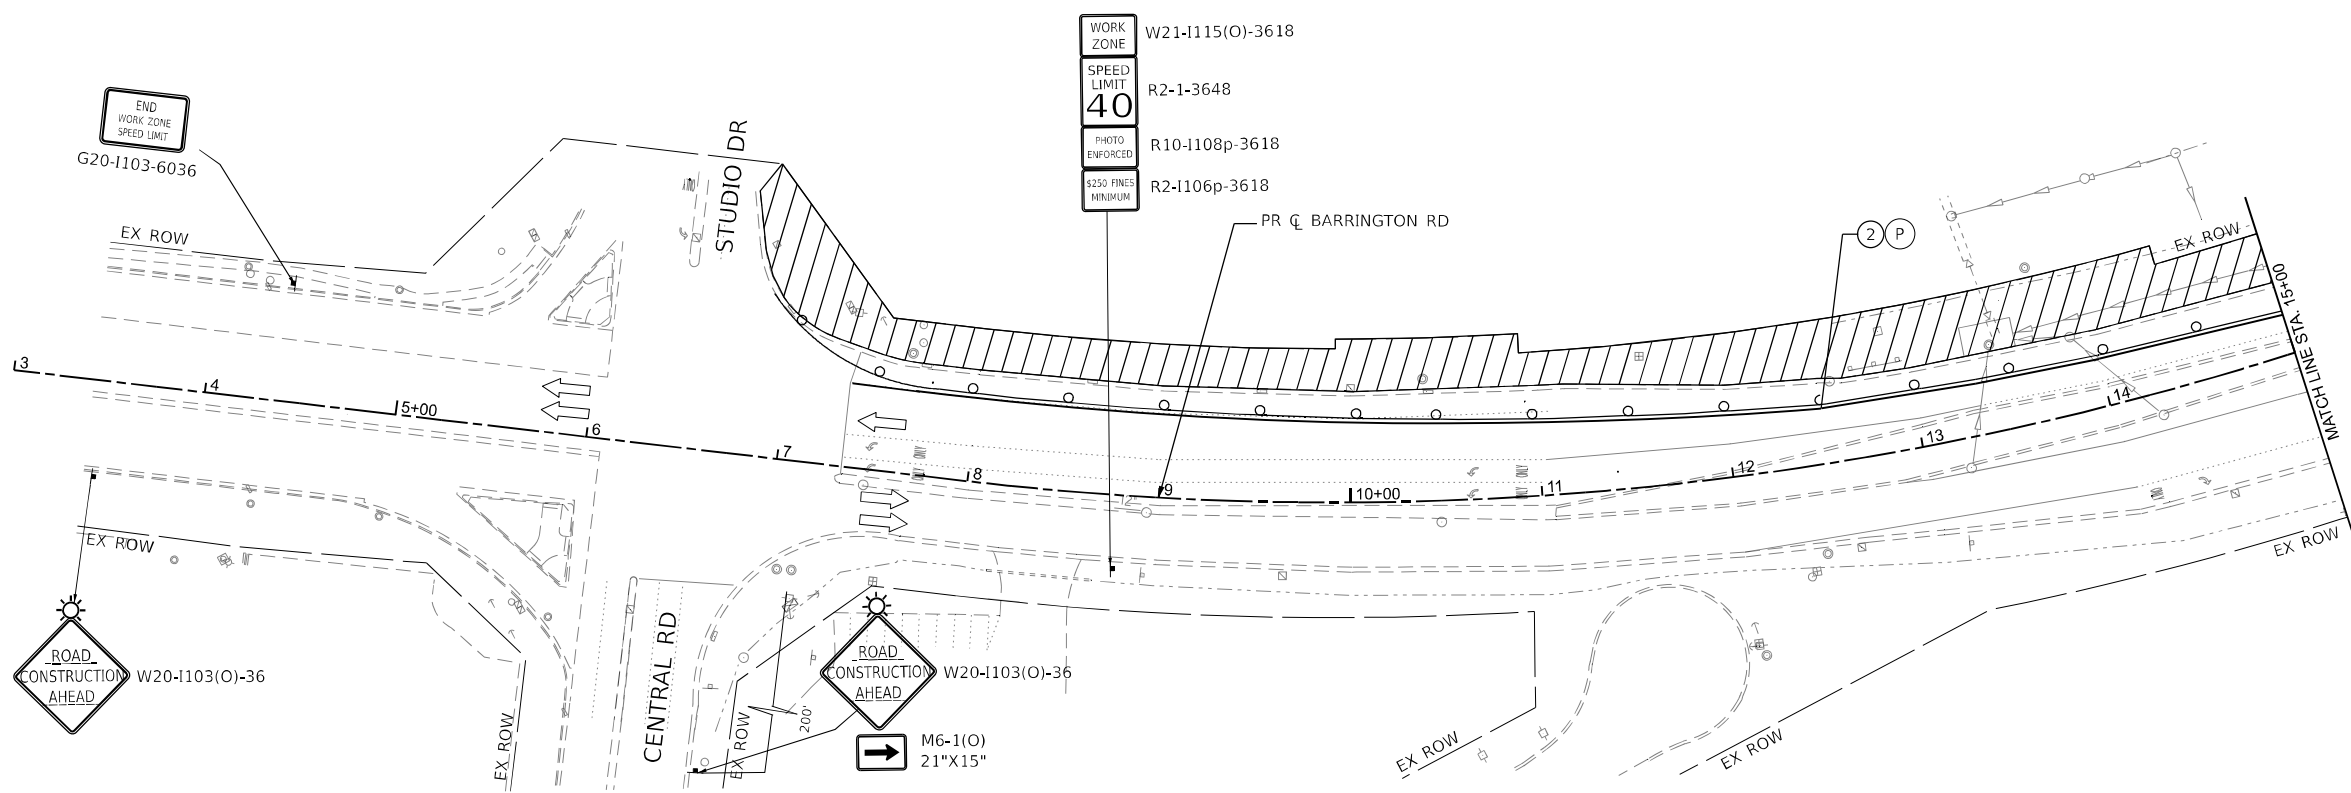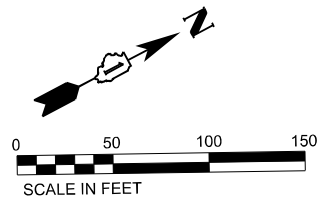

WORK ZONE W21-1115(O)-3618
 SPEED LIMIT 40 R2-1-3648
 PHOTO ENFORCED R10-1108p-3618
 \$250 FINE/ MINIMUM R2-1106p-3618

END WORK ZONE SPEED LIMIT G20-1103-6036

ROAD CONSTRUCTION AHEAD W20-1103(O)-36

ROAD CONSTRUCTION AHEAD W20-1103(O)-36

M6-1(O) 21"X15"

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩▩▩	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⊙	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISIONS -	
PLOT SCALE = 99.996' / in.	CHECKED - MM	REVISIONS -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISIONS -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 2
 SCALE: SHEET 47 OF 73 SHEETS STA. 3+00 TO STA. 15+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	130
ILLINOIS FED. AID PROJECT			CONTRACT NO. 62K33	

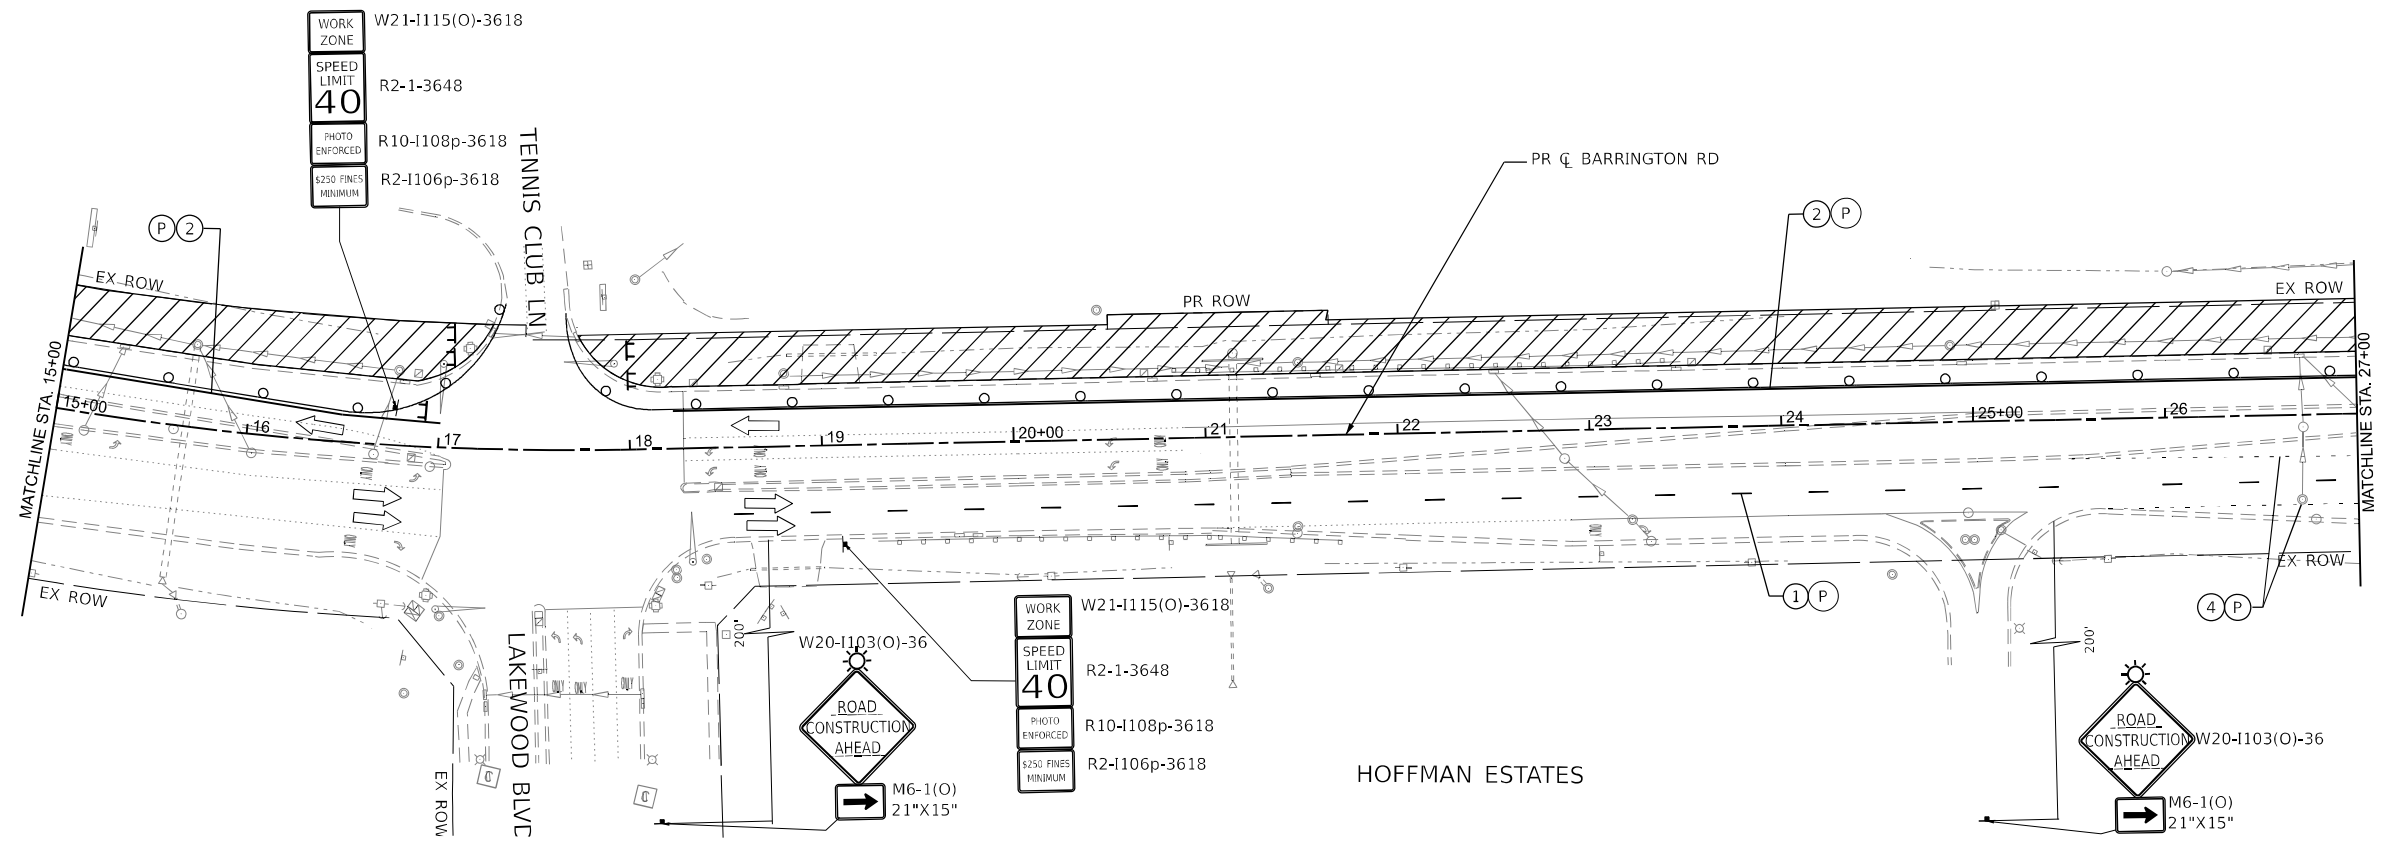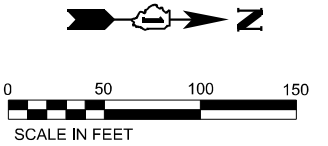

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADI)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	DIRECTION INDICATOR BARRICADE @ 50' C-C
‡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 USER: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
PLOT SCALE = 99.996' / in.	DRAWN - ML	REVISED -
PLOT DATE = 1/20/2026	CHECKED - MM	REVISED -
	DATE - 01/21/2026	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 2	
SCALE:	SHEET 48 OF 73 SHEETS STA. 15+00 TO STA. 27+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 131
ILLINOIS FED. AID PROJECT CONTRACT NO. 62K33				

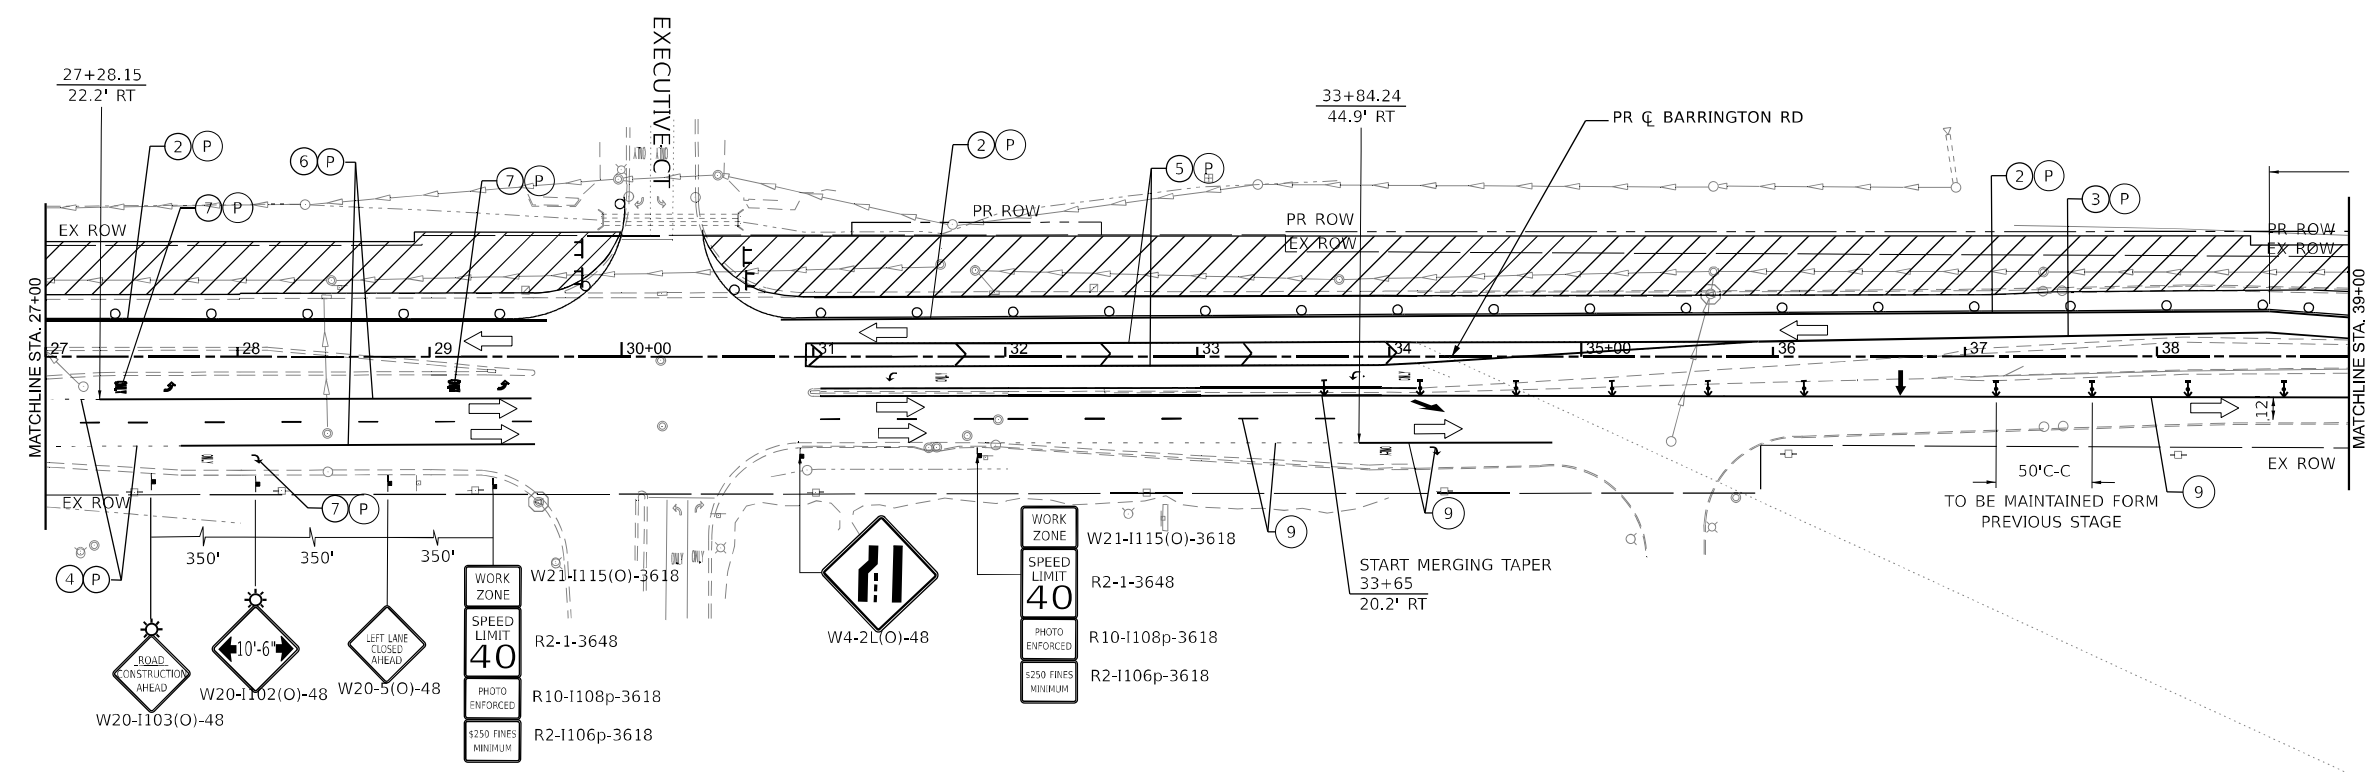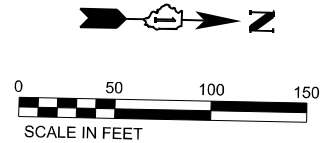

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⦿	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEETS: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISIONS -	
PLOT SCALE = 99.998' / in.	CHECKED - MM	REVISIONS -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISIONS -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 2
 SCALE: SHEET 49 OF 73 SHEETS STA. 27+00 TO STA. 39+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 132
ILLINOIS FED. AID PROJECT			CONTRACT NO. 62K33	

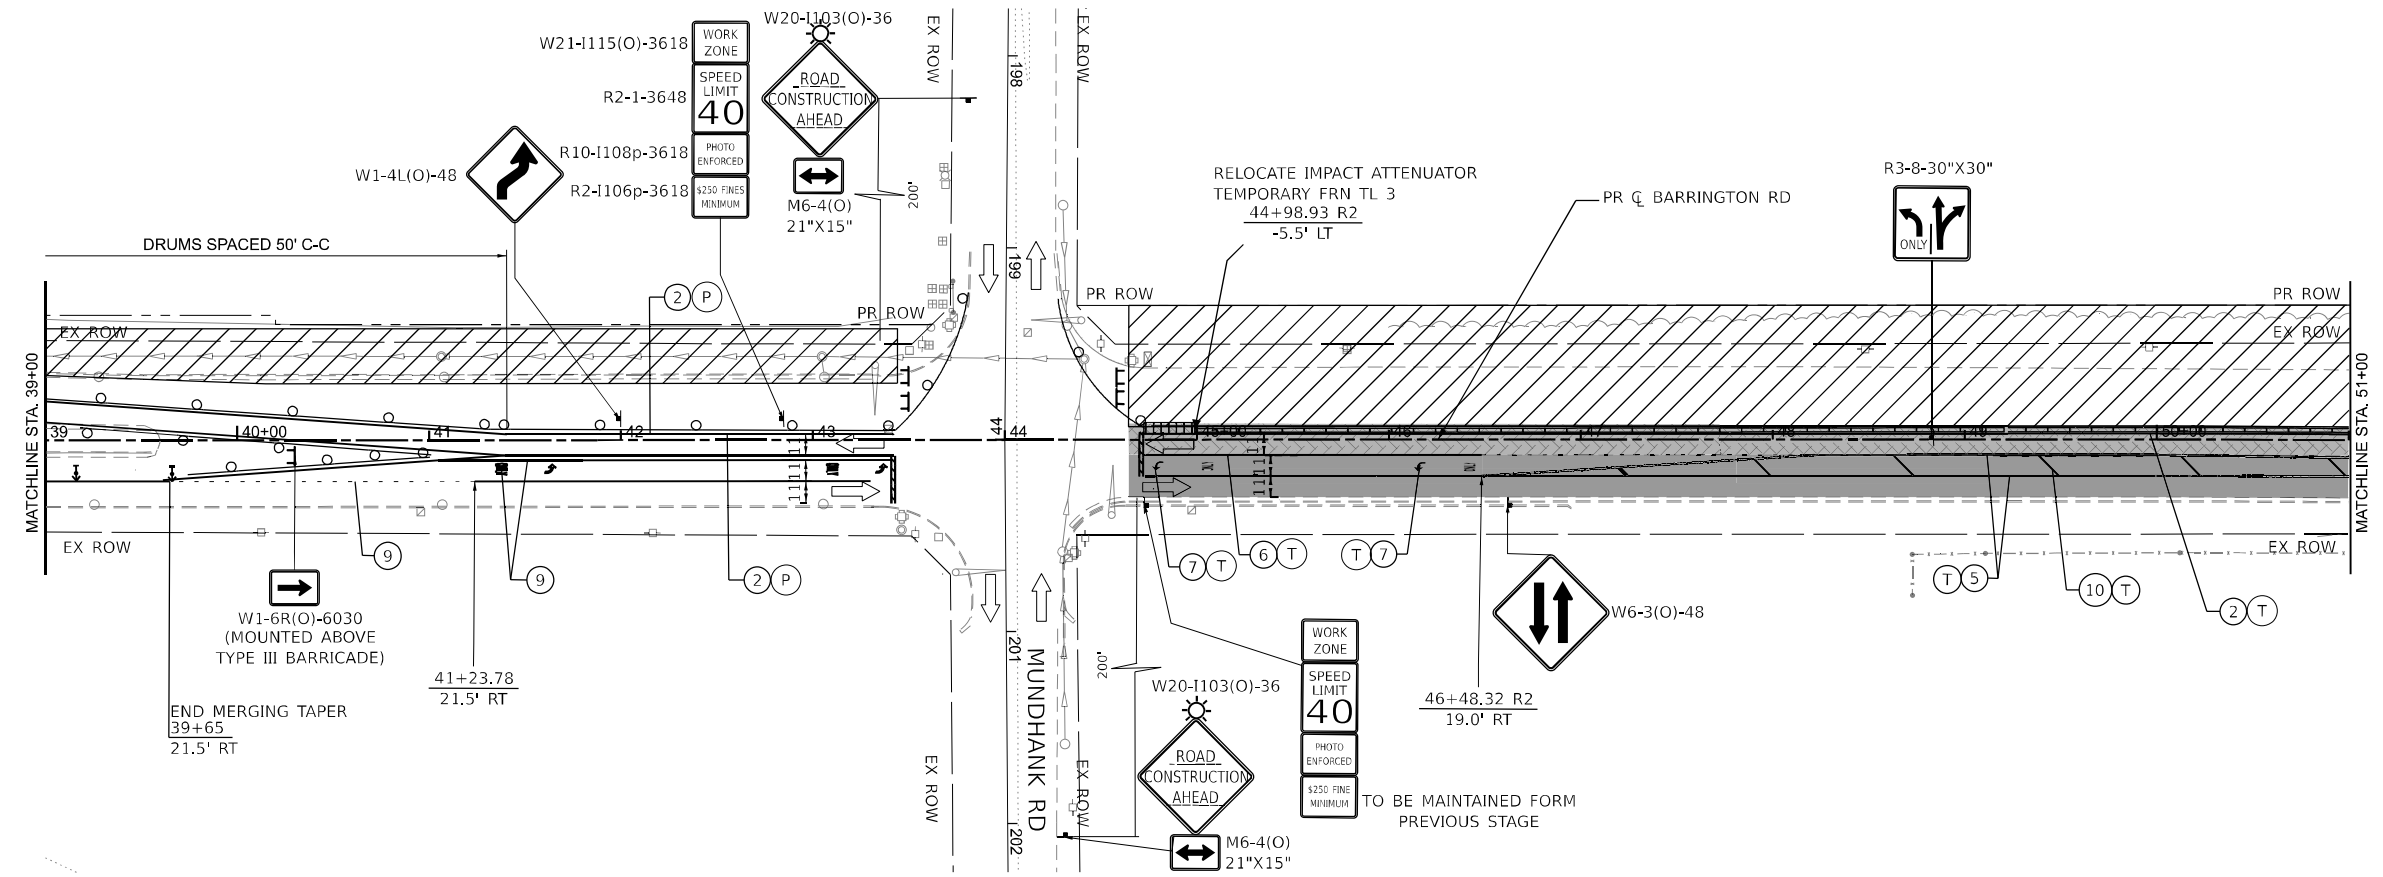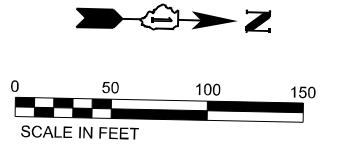

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩▩▩▩	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD



MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	DRAWN - ML	CHECKED - MM	REVISED - _____
	PLOT SCALE = 99.998' / in.	DATE - 01/21/2026	REVISED - _____
	PLOT DATE = 1/20/2026		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 2	
SCALE:	SHEET 50 OF 73 SHEETS STA. 39+00 TO STA. 51+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	133
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

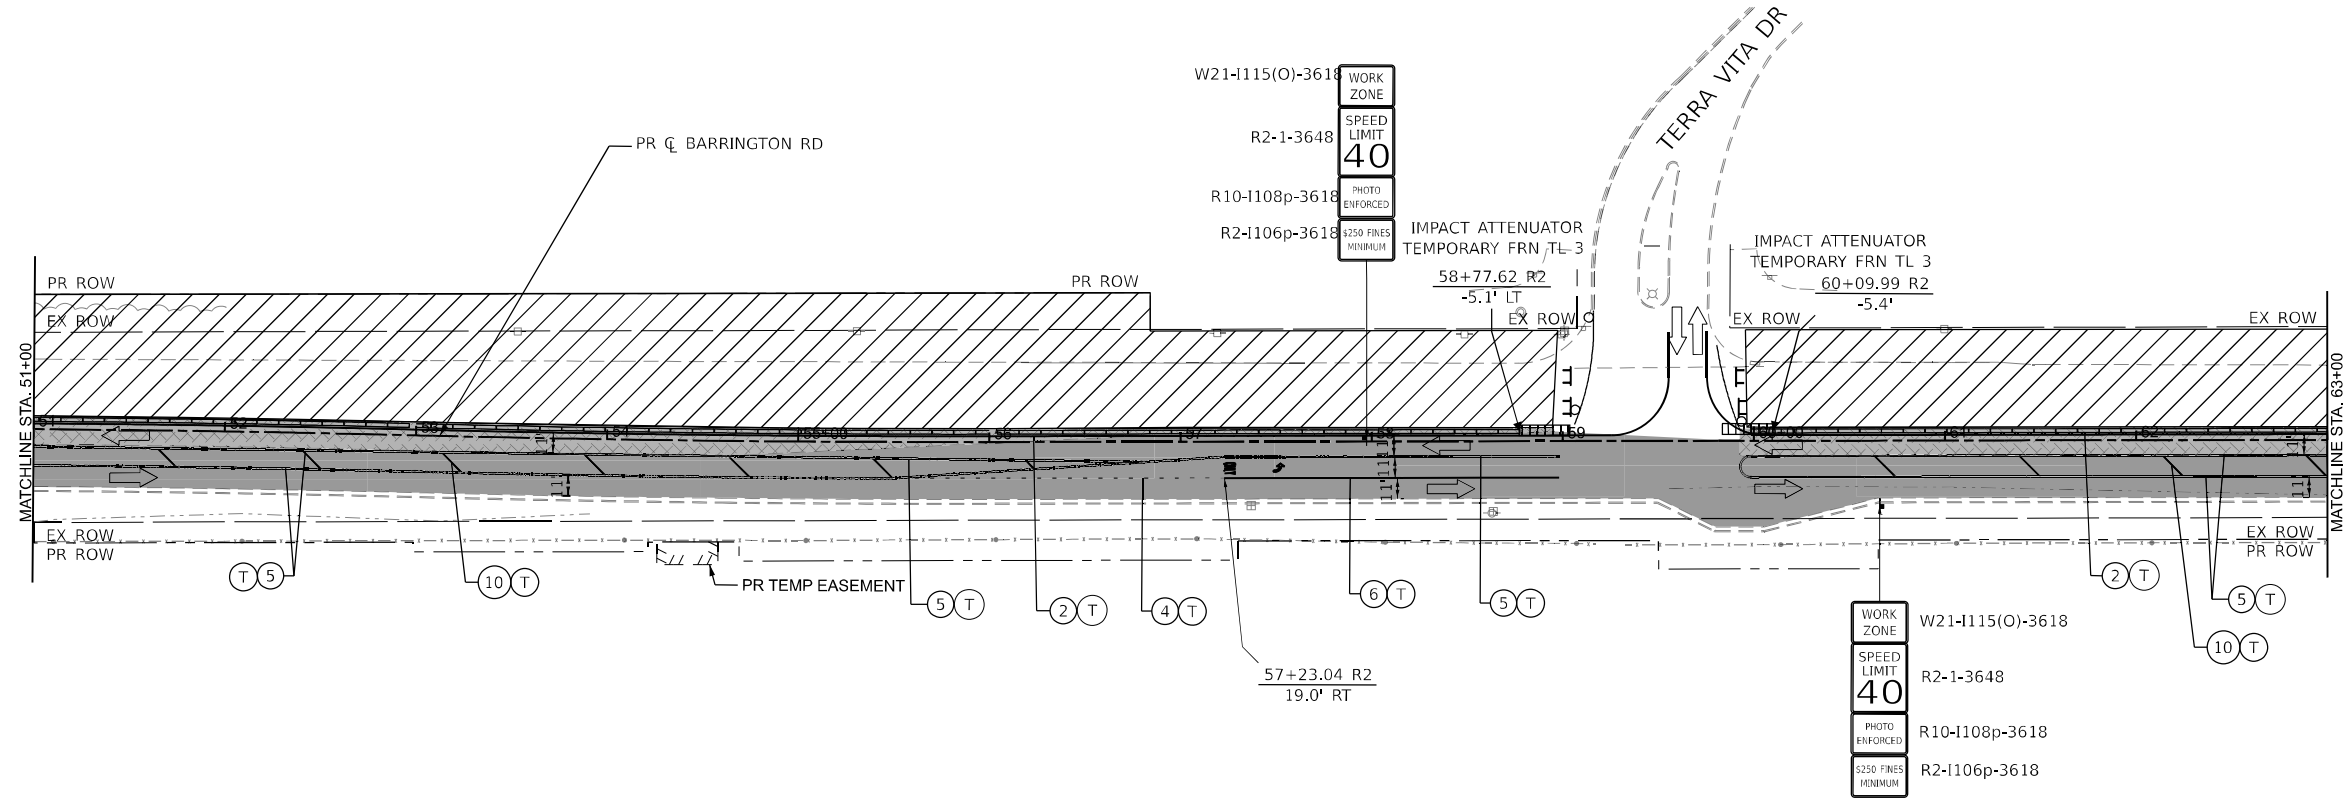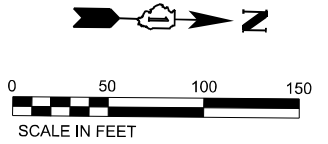

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▩ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▩ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▩ TEMPORARY CONCRETE BARRIER
Ⓣ TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	← TRAFFIC DIRECTION ARROW
Ⓟ TEMPORARY PAVEMENT MARKING - PAINT	⚡ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD



MODEL: Default
 FILE NAME: I:\projects\2019\2019-161-W\2019-161-W-MOT\Stage 2\161K33_MOT_Sheet 5

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	PLOT SCALE = 100.418 * / in.	DRAWN - ML	REVISED - _____
	PLOT DATE = 1/20/2026	CHECKED - MM	REVISED - _____
		DATE - 01/21/2026	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 2			
SCALE:	SHEET 51 OF 73 SHEETS	STA. 51+00	TO STA. 63+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 134
ILLINOIS FED. AID PROJECT CONTRACT NO. 62K33				

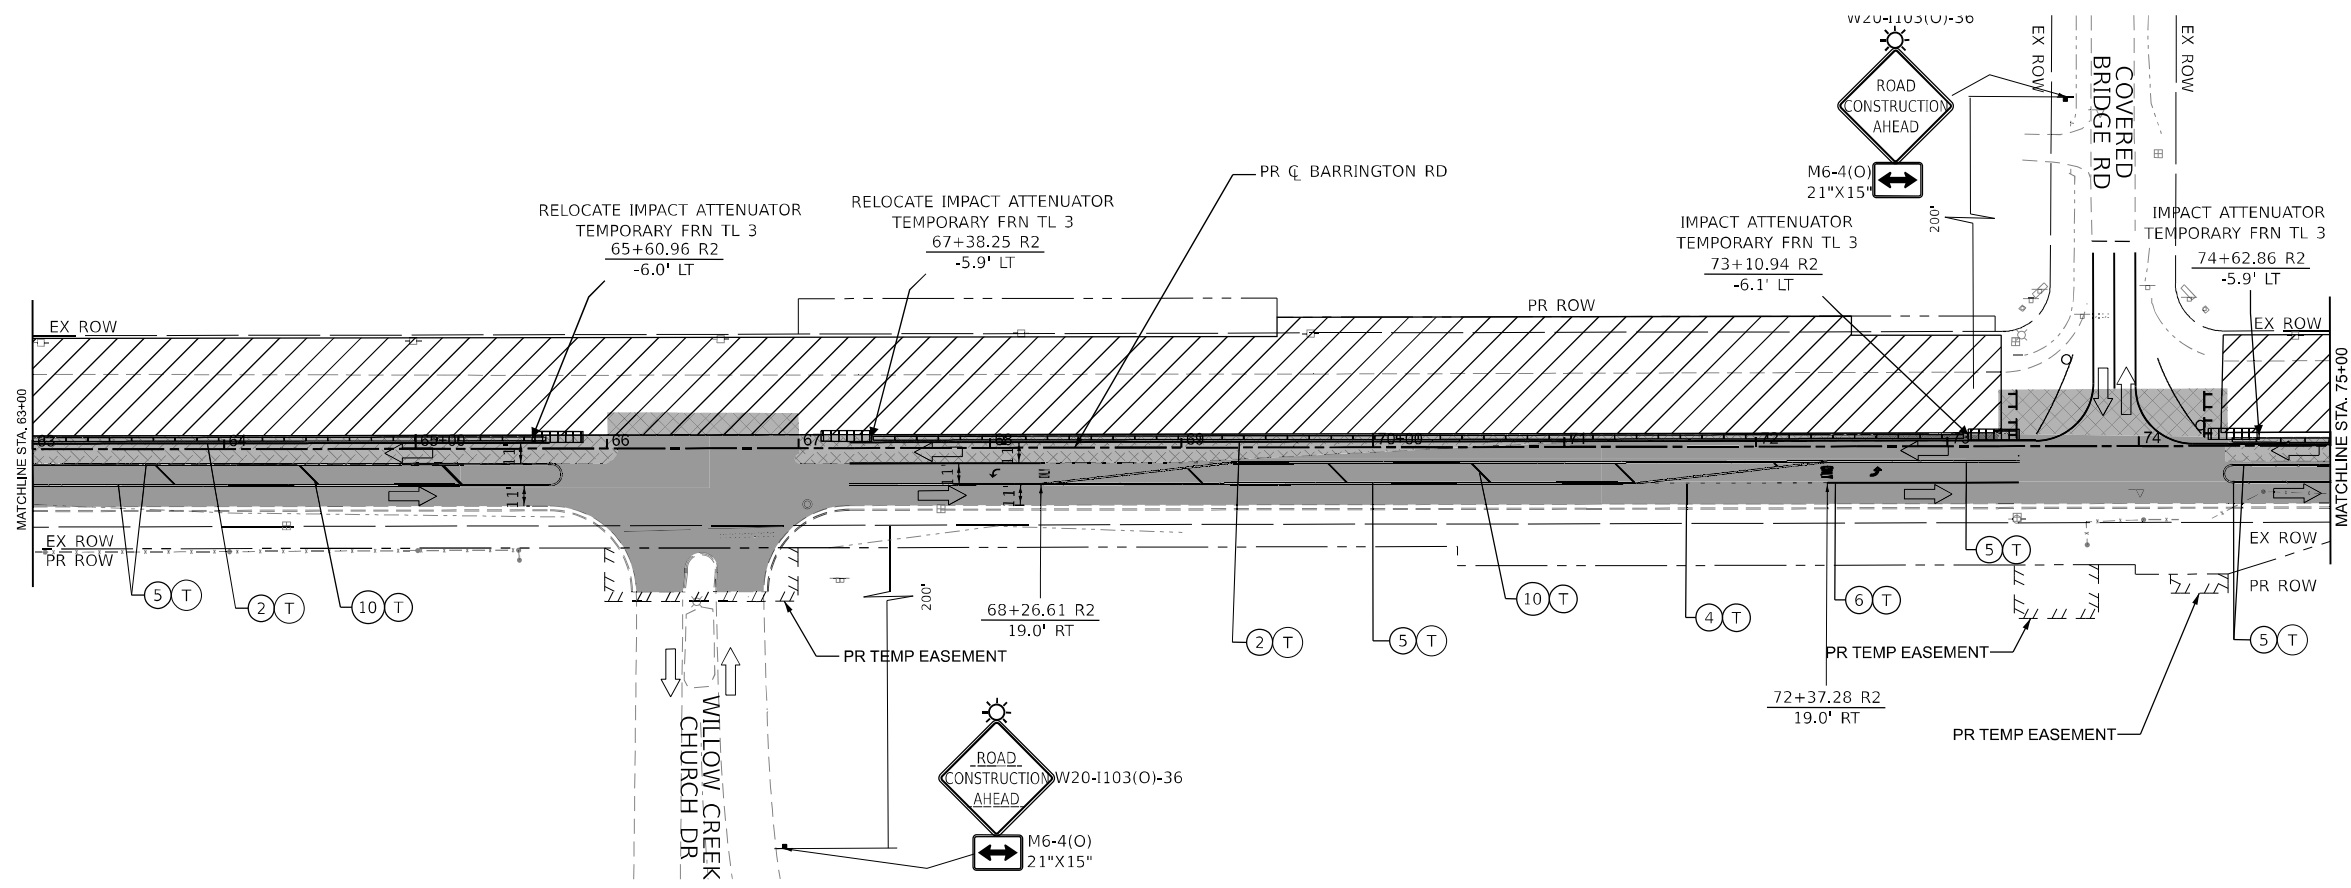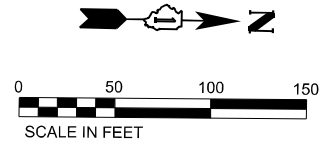

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	DIRECTION INDICATOR BARRICADE @ 50' C-C
■ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	ARROW BOARD

MODEL: Default FILE NAME: ... PROJECT: ... SHEET: 52 OF 73





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
DRAWN - ML	REVISIONS - _____	
PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED - _____
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC	
BARRINGTON RD - STAGE 2	
SCALE:	SHEET 52 OF 73 SHEETS STA. 63+00 TO STA. 75+00

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	135
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

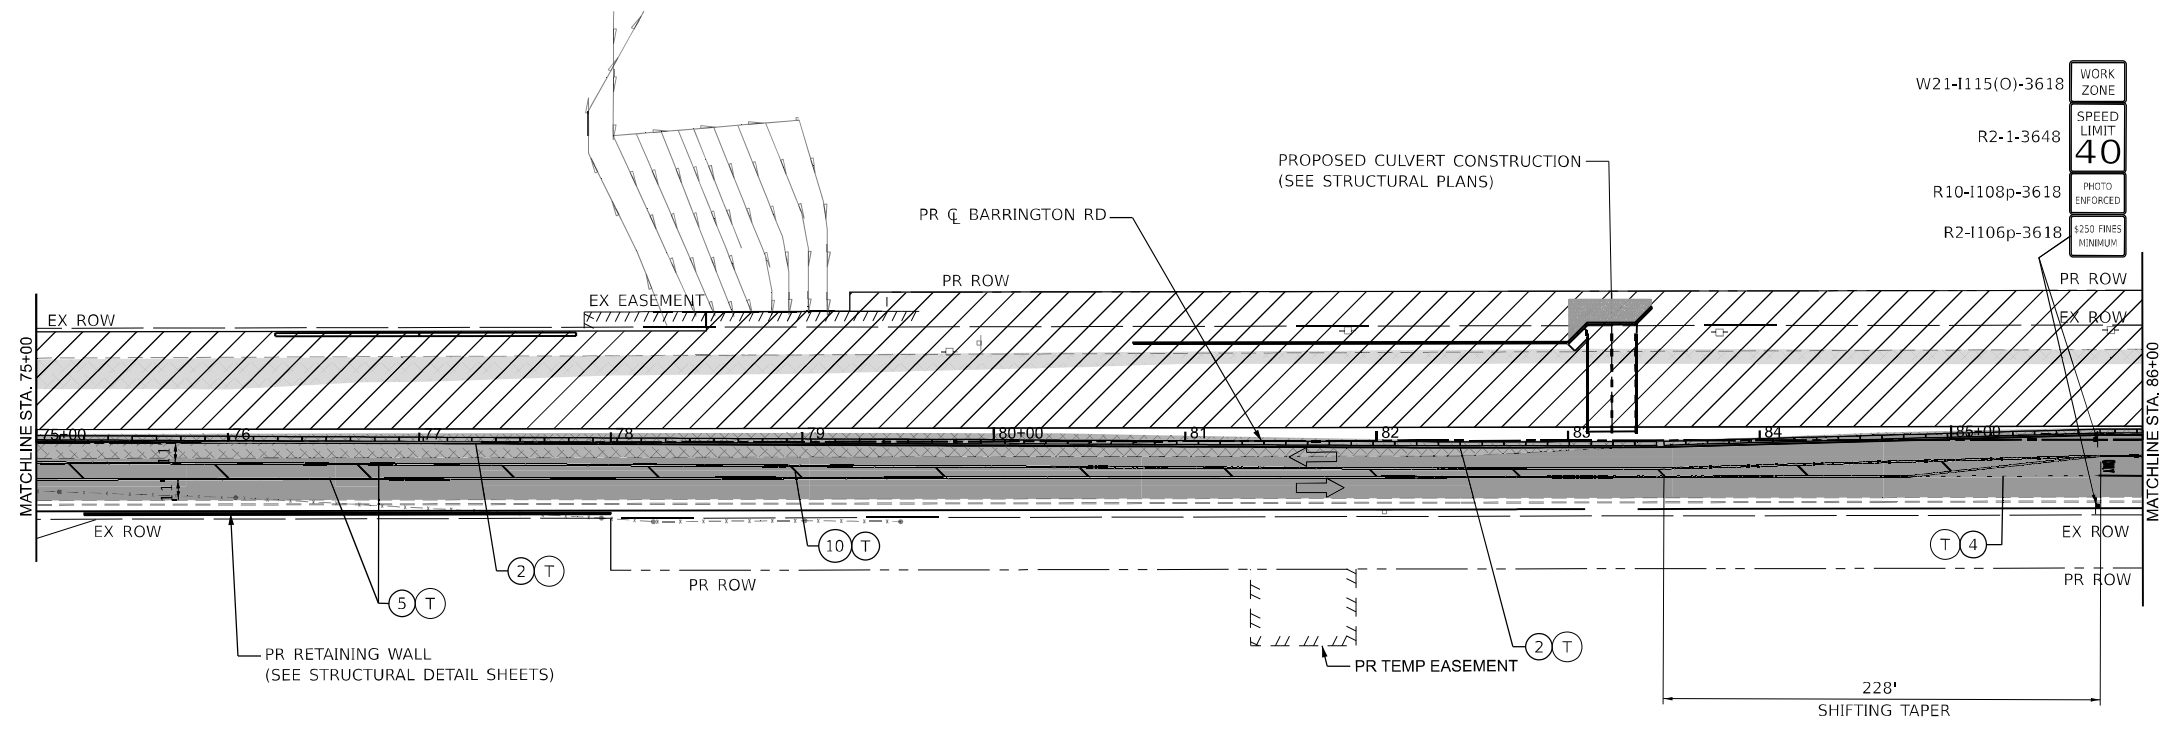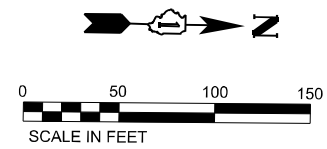

W21-I115(O)-3618	WORK ZONE
R2-1-3648	SPEED LIMIT 40
R10-I108p-3618	PHOTO ENFORCED
R2-I106p-3618	\$250 FINES MINIMUM

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	DIRECTION INDICATOR BARRICADE @ 50' C-C
I TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	ARROW BOARD

MODEL: D:\file11... FILE NAME: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	CHECKED - MM	REVISIED -
PLOT SCALE = 100.245' / in.	DATE - 01/21/2026	REVISIED -
PLOT DATE = 1/20/2026		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
BARRINGTON RD - STAGE 2

SCALE: SHEET 53 OF 73 SHEETS STA. 75+00 TO STA. 86+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	136
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				


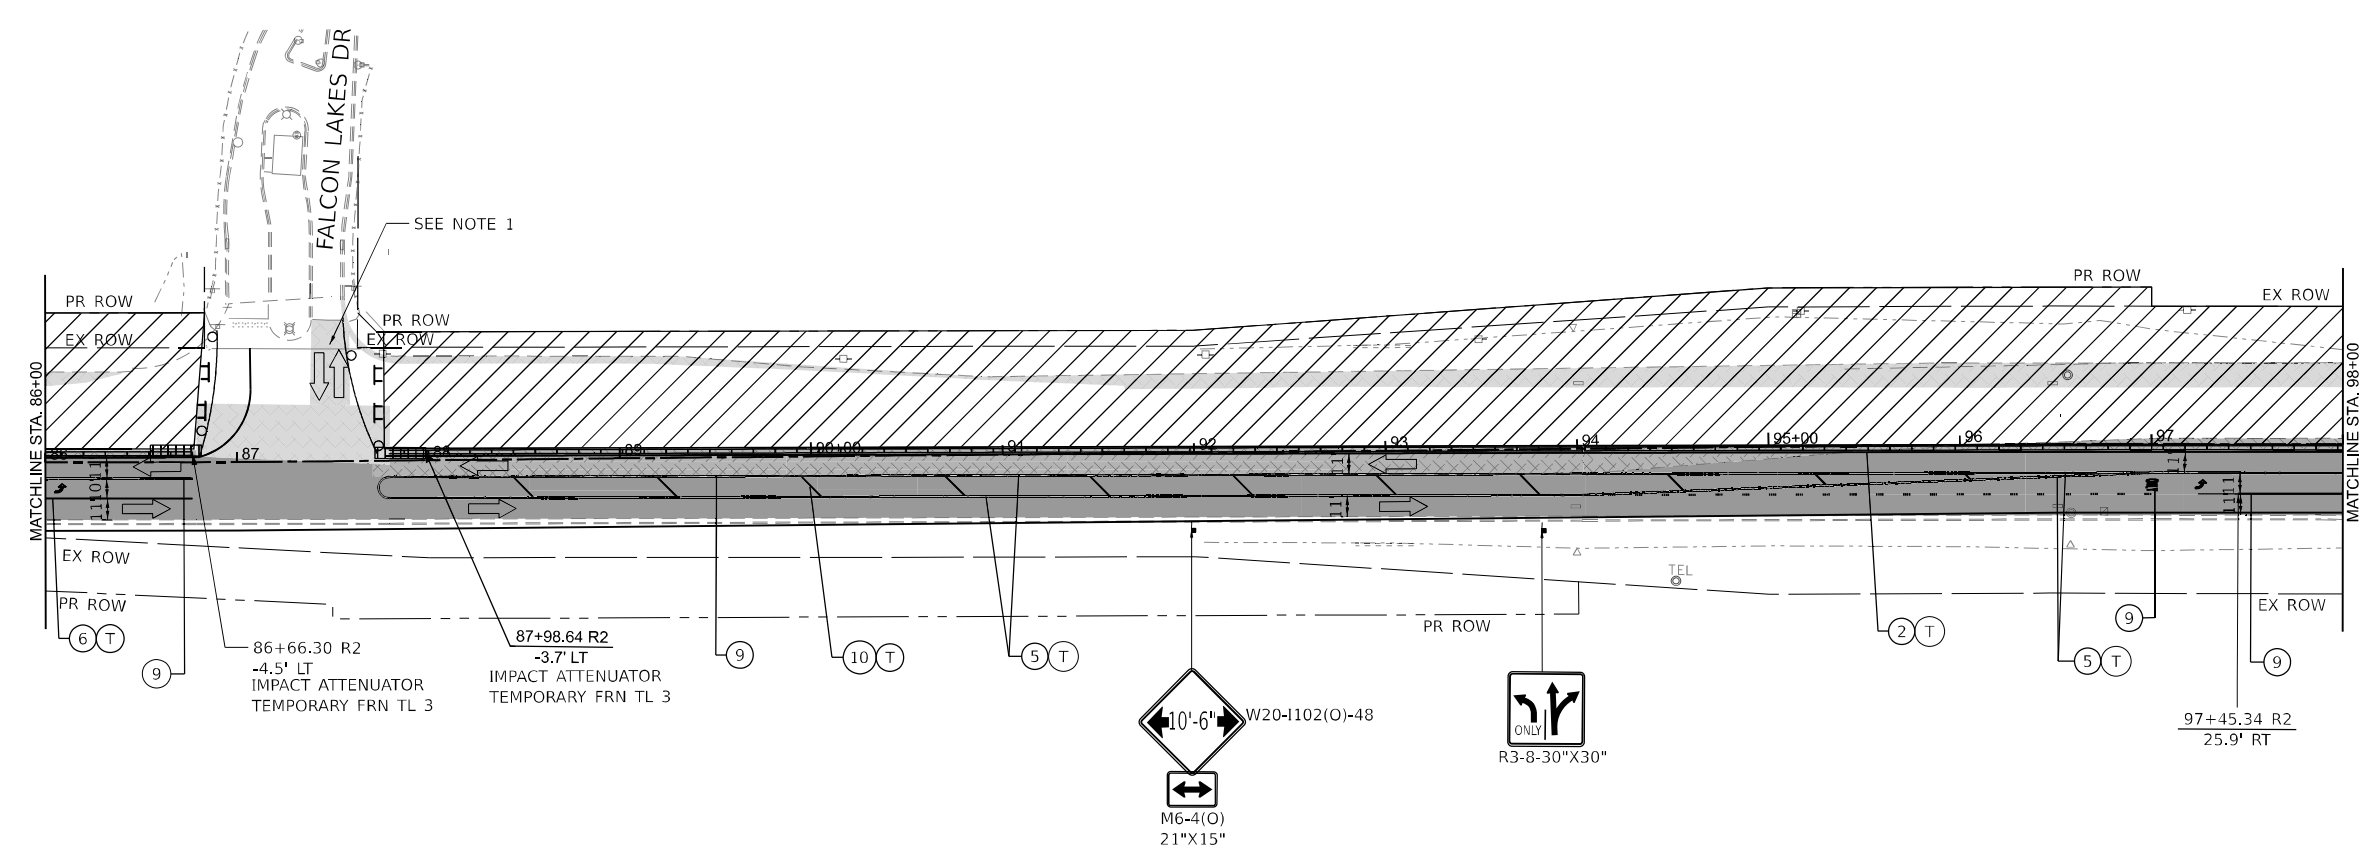
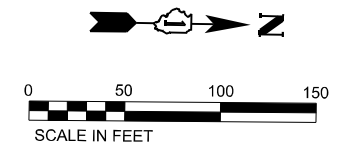


NOTE:
 1. CONTRACTOR SHALL CONSTRUCT ADDITIONAL TEMPORARY PAVEMENT RAMP AT THE INTERSECTION OF FALCON LAKES FRIVE PRIOR TO OPENING THE LEFT TURN MOVEMENT IN THIS STAGE.

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	▬	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file1... FILE NAME: ... SHEETS: 08-MOT-18-Stage 2-D-12K33_MOT_Sheet 3

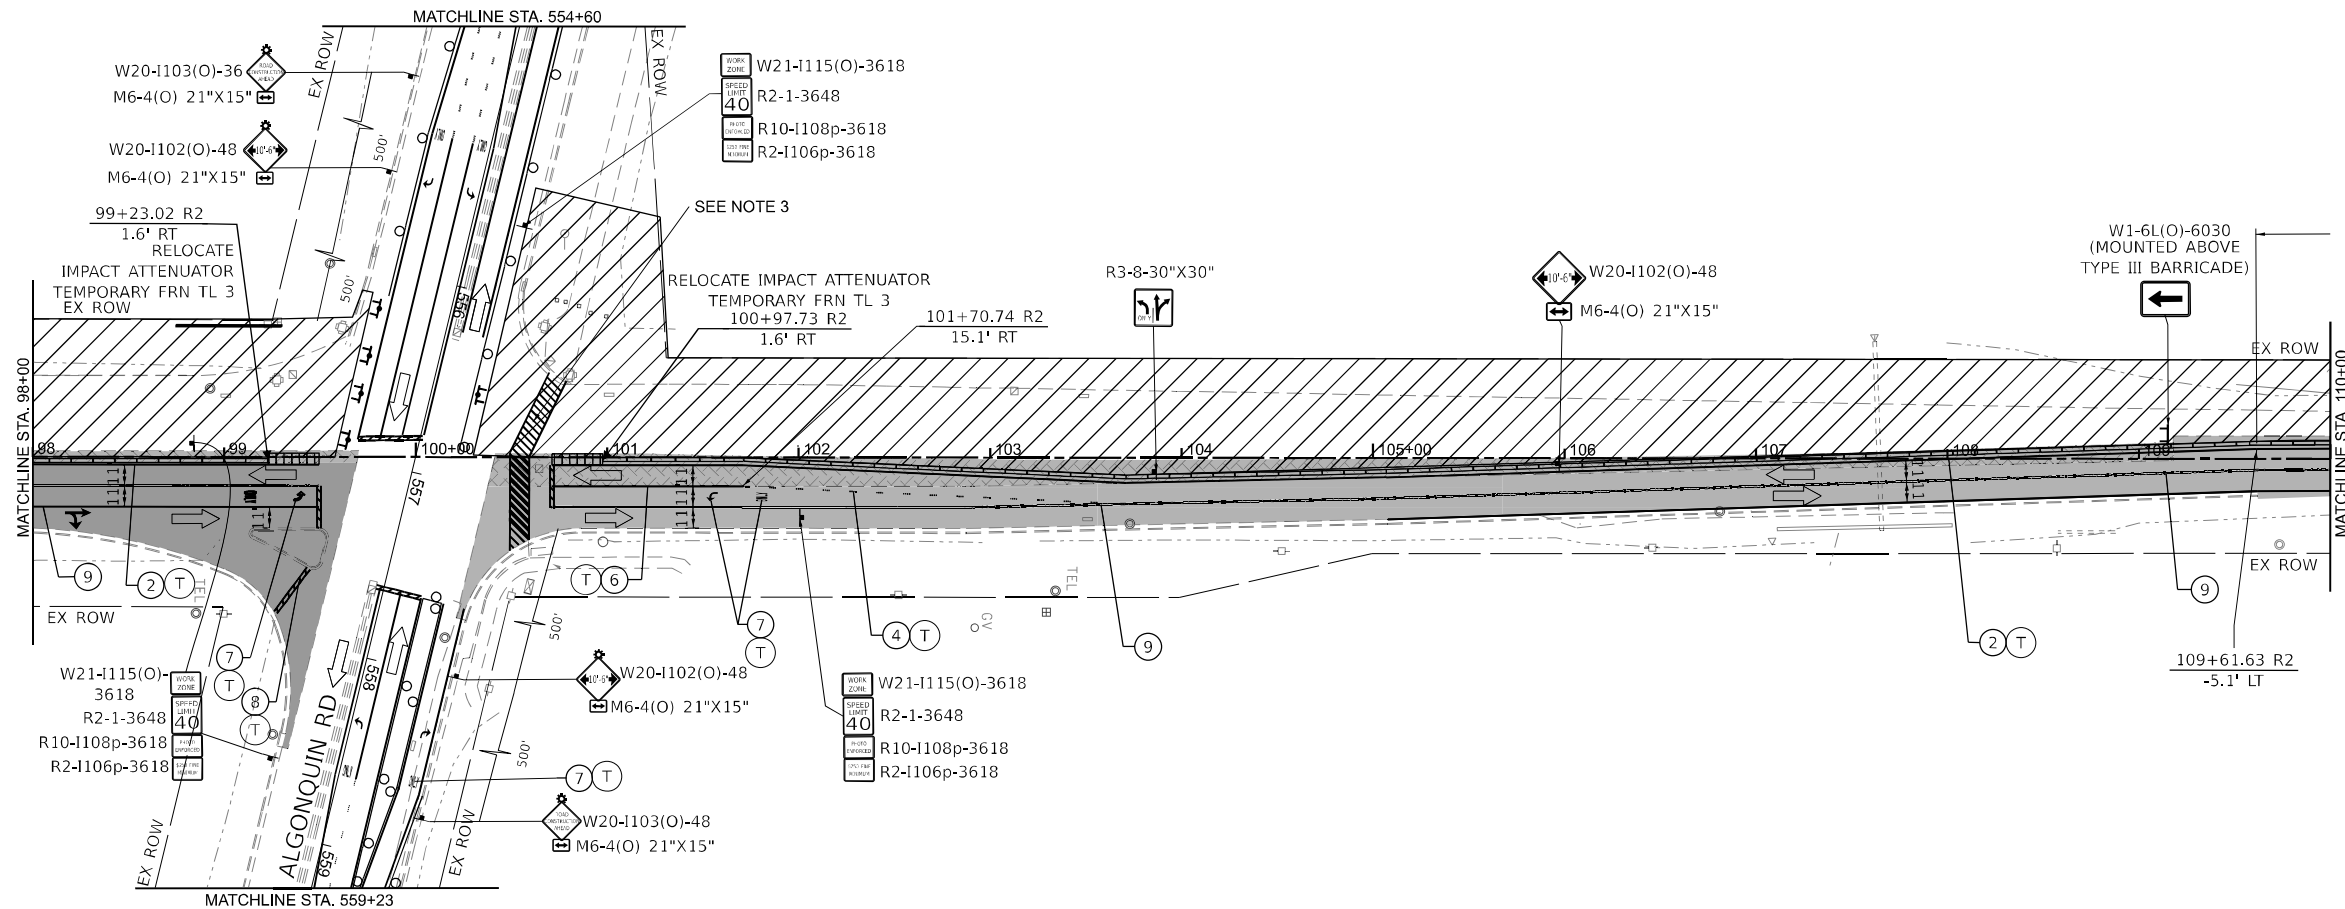

NOTES:

1. LANE CLOSURE, STAGING AND TRAFFIC CONTROL ALONG ALGONQUIN ROAD IS REQUIRED WHEN THE CONTRACTOR IS WORKING WITHIN 50' OF THE INTERSECTION.
2. CONTRACTOR SHALL MAINTAIN NORMAL TRAFFIC PATTERN ALONG ALGONQUIN ROAD AS SOON AS THE WORK IS COMPLETED IN THE VICINITY OF INTERSECTION.
3. CONTRACTOR SHALL MAINTAIN ACCESS TO PEDESTRIANS AND BIKES THRU THE INTERSECTION AT ALL TIMES DURING CONSTRUCTION.

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▤	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▧	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚠	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	📍	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	📞	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	⇈	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

OSEH inc.

310 N. VAN BUREN ST.
SUITE 200
CHICAGO, IL 60607
WWW.OSEH.COM



USER NAME	= AmulyaPusuluri	DESIGNED	- AP	REVISED	-
		DRAWN	- ML	REVISED	-
PLOT SCALE	= 1/20.245" / in.	CHECKED	- MM	REVISED	-
PLOT DATE	= 1/20/2026	DATE	- 01/21/2026	REVISED	-

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
BARRINGTON RD - STAGE 2

SCALE: SHEET 56 OF 73 SHEETS STA. 98+00 TO STA. 110+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	138
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

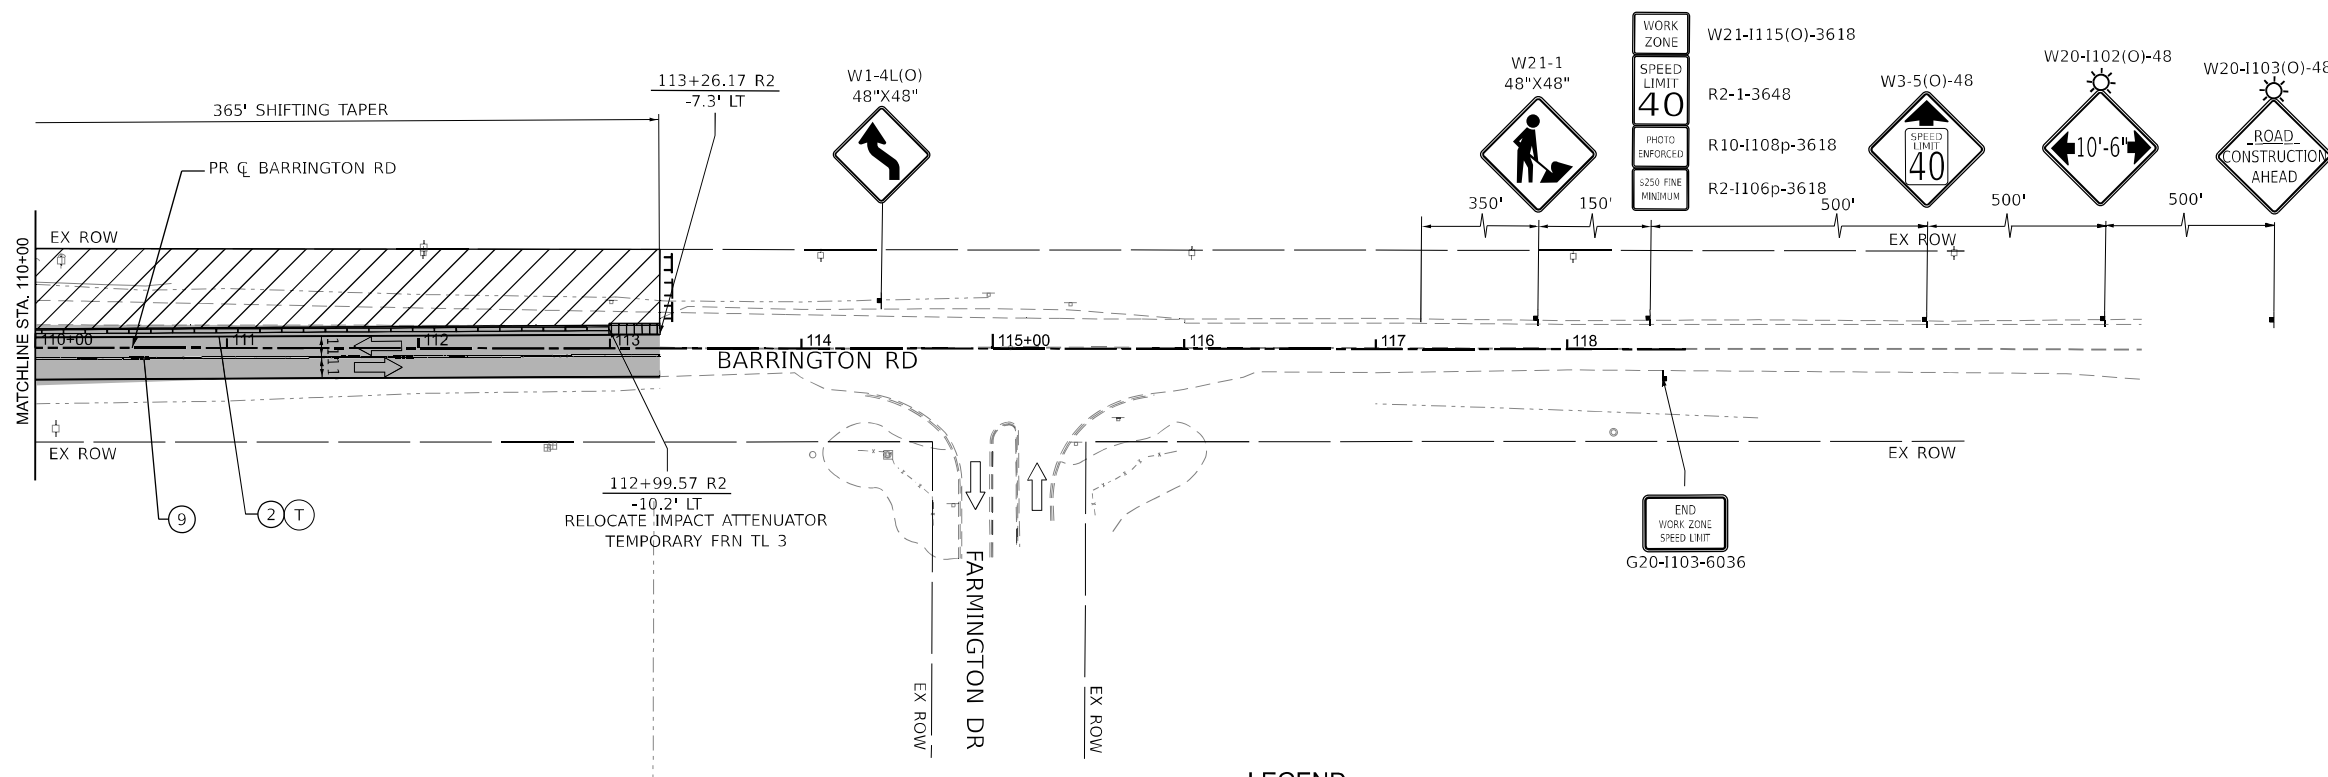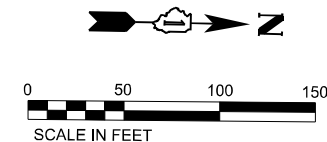

NOTES:

1. CONTRACTOR SHOULD UTILIZE THE HIGHWAY STANDARD 701206 AND CONSTRUCT BARRINGTON ROAD SOUTHBOUND PAVEMENT BETWEEN STA. 110+00 AND STA. 112+60.
2. CONTRACTOR IS ALLOWED TO CLOSE ONE LANE OF BARRINGTON ROAD NORTH OF ALGONQUIN ROAD ONLY DURING THE HOURS SPECIFIED IN SPECIAL PROVISION "KEEPING THE ARTERIAL ROADWAYS OPEN TO TRAFFIC".
3. CONTRACTOR SHALL MAINTAIN ONE LANE IN EACH DIRECTION DURING PEAK HOURS AT ALL TIMES DURING CONSTRUCTION.

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩▩▩▩	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚠	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚙	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file1\... FILE NAME: ... SHEETS: 08-MOT-139-10





USER NAME	= AmulyaPusuluri	DESIGNED -	AP	REVISED -	
DRAWN	- ML	REVISIONS		REVISED -	
PLOT SCALE	= 100.245' / in.	CHECKED -	MM	REVISED -	
PLOT DATE	= 1/20/2026	DATE	- 01/21/2026	REVISED -	

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
BARRINGTON RD - STAGE 2

SCALE: SHEET 56 OF 73 SHEETS STA. 110+00 TO STA. 118+00




F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	139
				CONTRACT NO. 62K33
ILLINOIS FED. AID PROJECT				

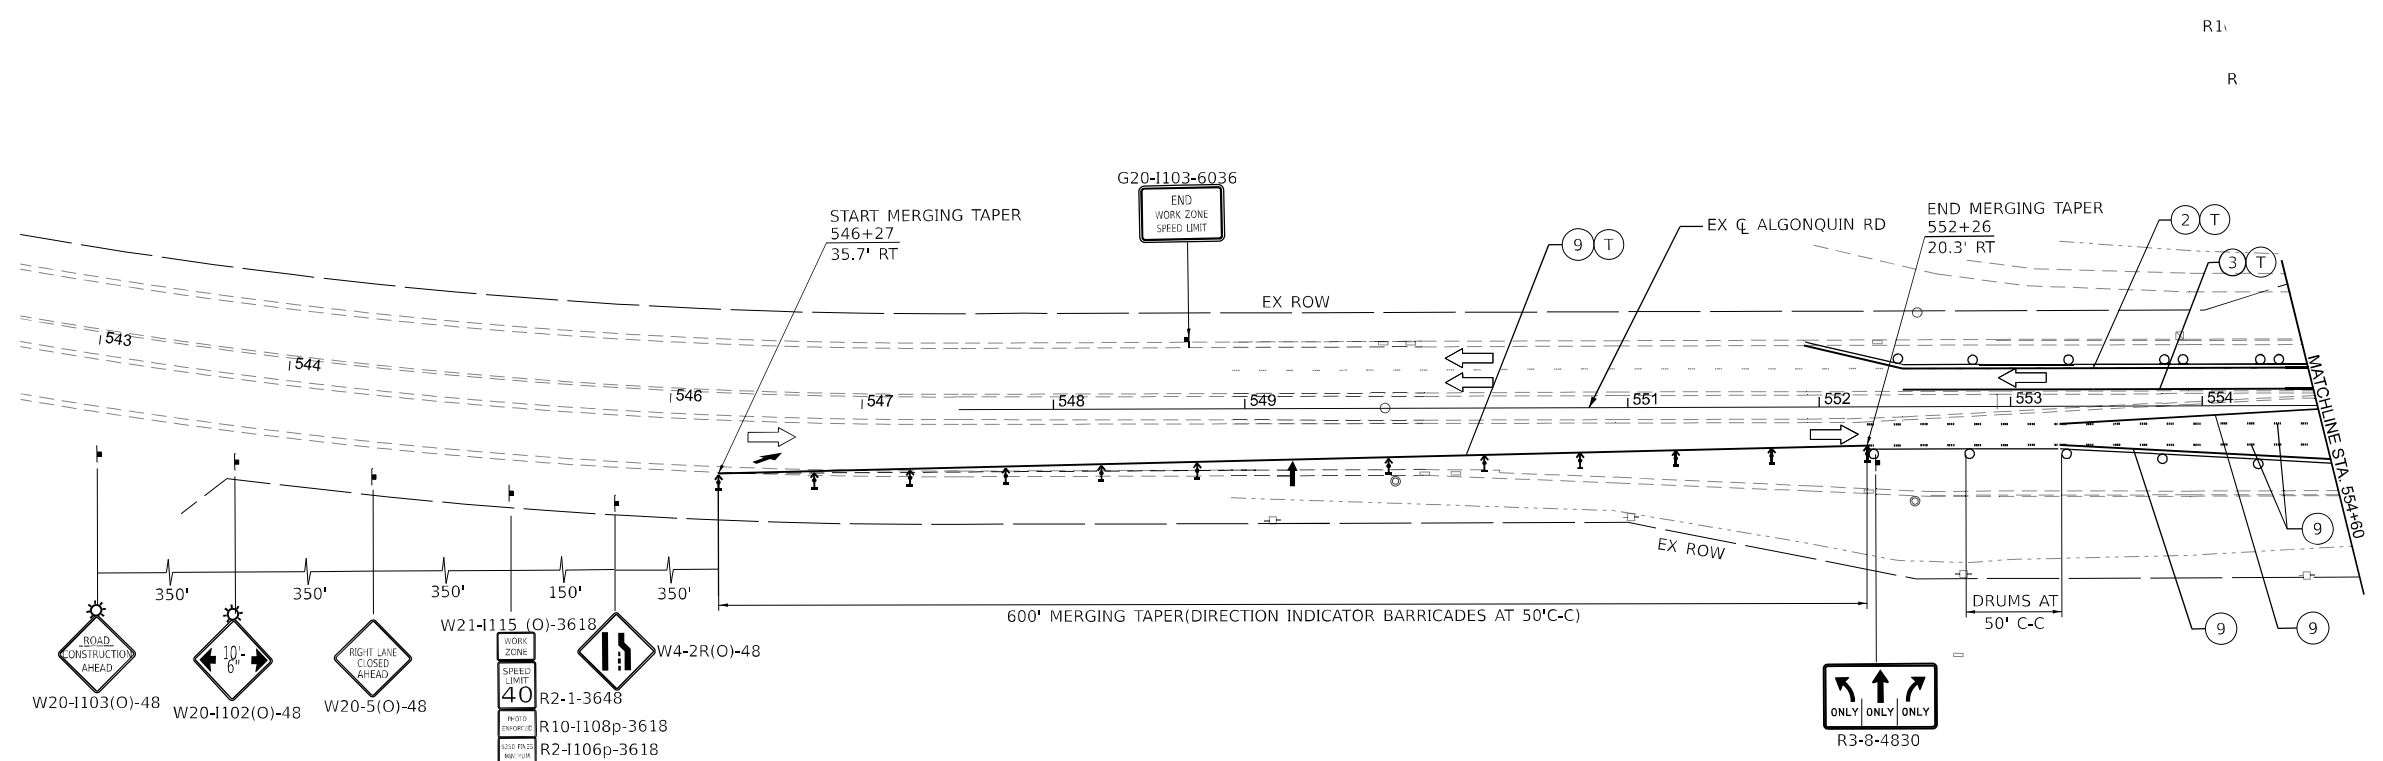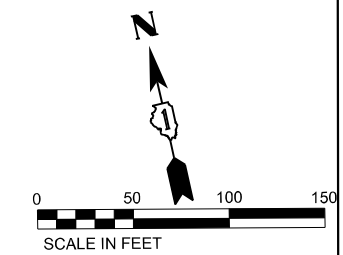

LEGEND

(1)	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	[Solid Grey]	COMPLETED PAVEMENT
(2)	PAVEMENT MARKING - LINE 4" - WHITE	[Diagonal Hatching]	WORK AREA
(3)	PAVEMENT MARKING - LINE 4" - YELLOW	[Cross-hatching]	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
(4)	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	[Diagonal Hatching]	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
(5)	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	[Vertical Bars]	IMPACT ATTENUATOR
(6)	PAVEMENT MARKING - LINE 6" - WHITE	[Type III Barricade]	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
(7)	PAVEMENT MARKING - LETTERS AND SYMBOLS	[Double Vertical Panels]	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
(8)	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	[Proposed Sign Post]	PROPOSED SIGN POST
(9)	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	[Construction Drums]	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADI)
(10)	PAVEMENT MARKING - LINE 12" YELLOW	[Temporary Concrete Barrier]	TEMPORARY CONCRETE BARRIER
(T)	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	[Traffic Direction Arrow]	TRAFFIC DIRECTION ARROW
(P)	TEMPORARY PAVEMENT MARKING - PAINT	[Direction Indicator Barricade]	DIRECTION INDICATOR BARRICADE @ 50' C-C
[I]	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	[Arrow Board]	ARROW BOARD

MODEL: D:\file\... FILE NAME: ... PROJECT: ... SHEET: 11 of 73

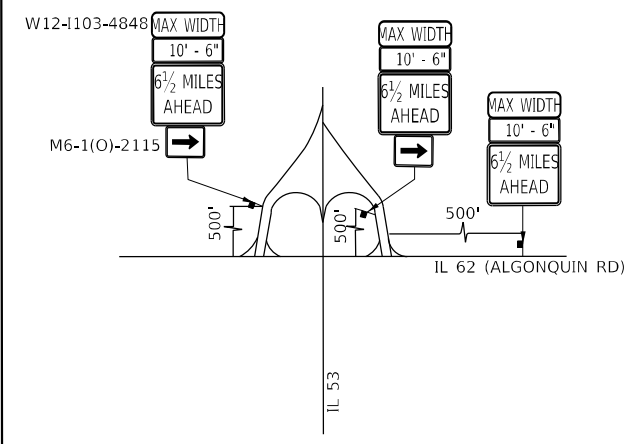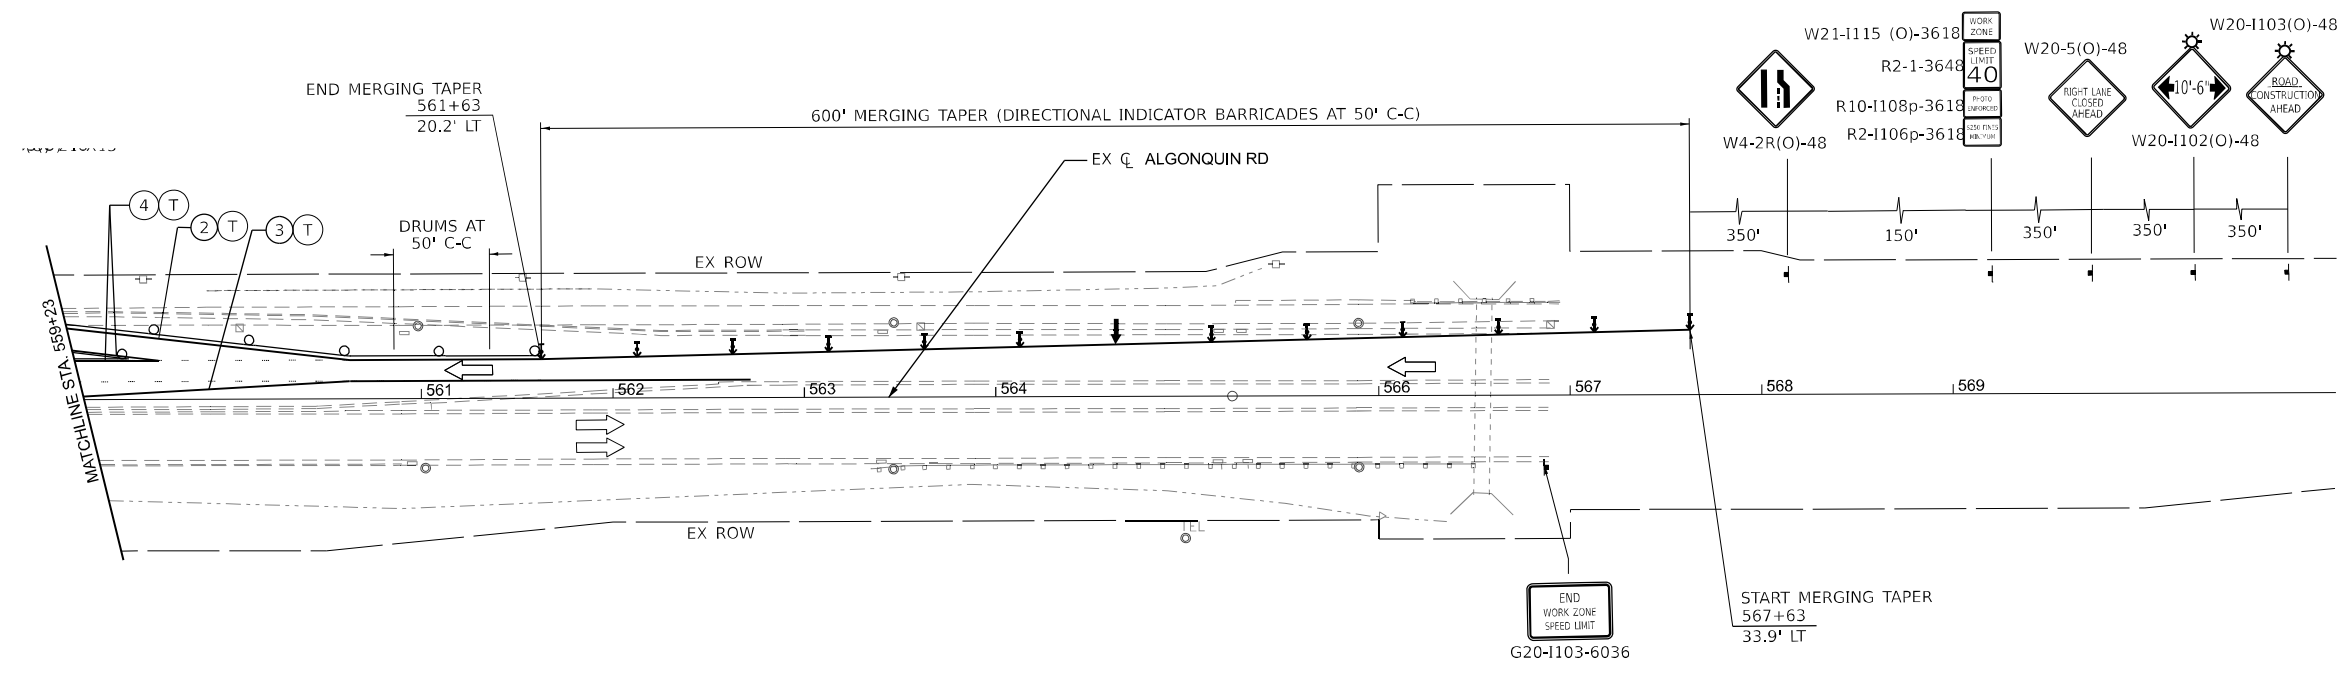
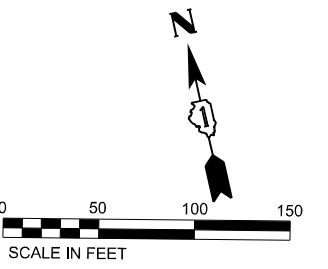


NOTE:
ADVANCE MAXIMUM WIDTH RESTRICTION SIGNING SHALL REMAIN INSTALLED UNTIL THE COMPLETION OF STAGE 2

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file1... FILE NAME: ... SHEET: 12

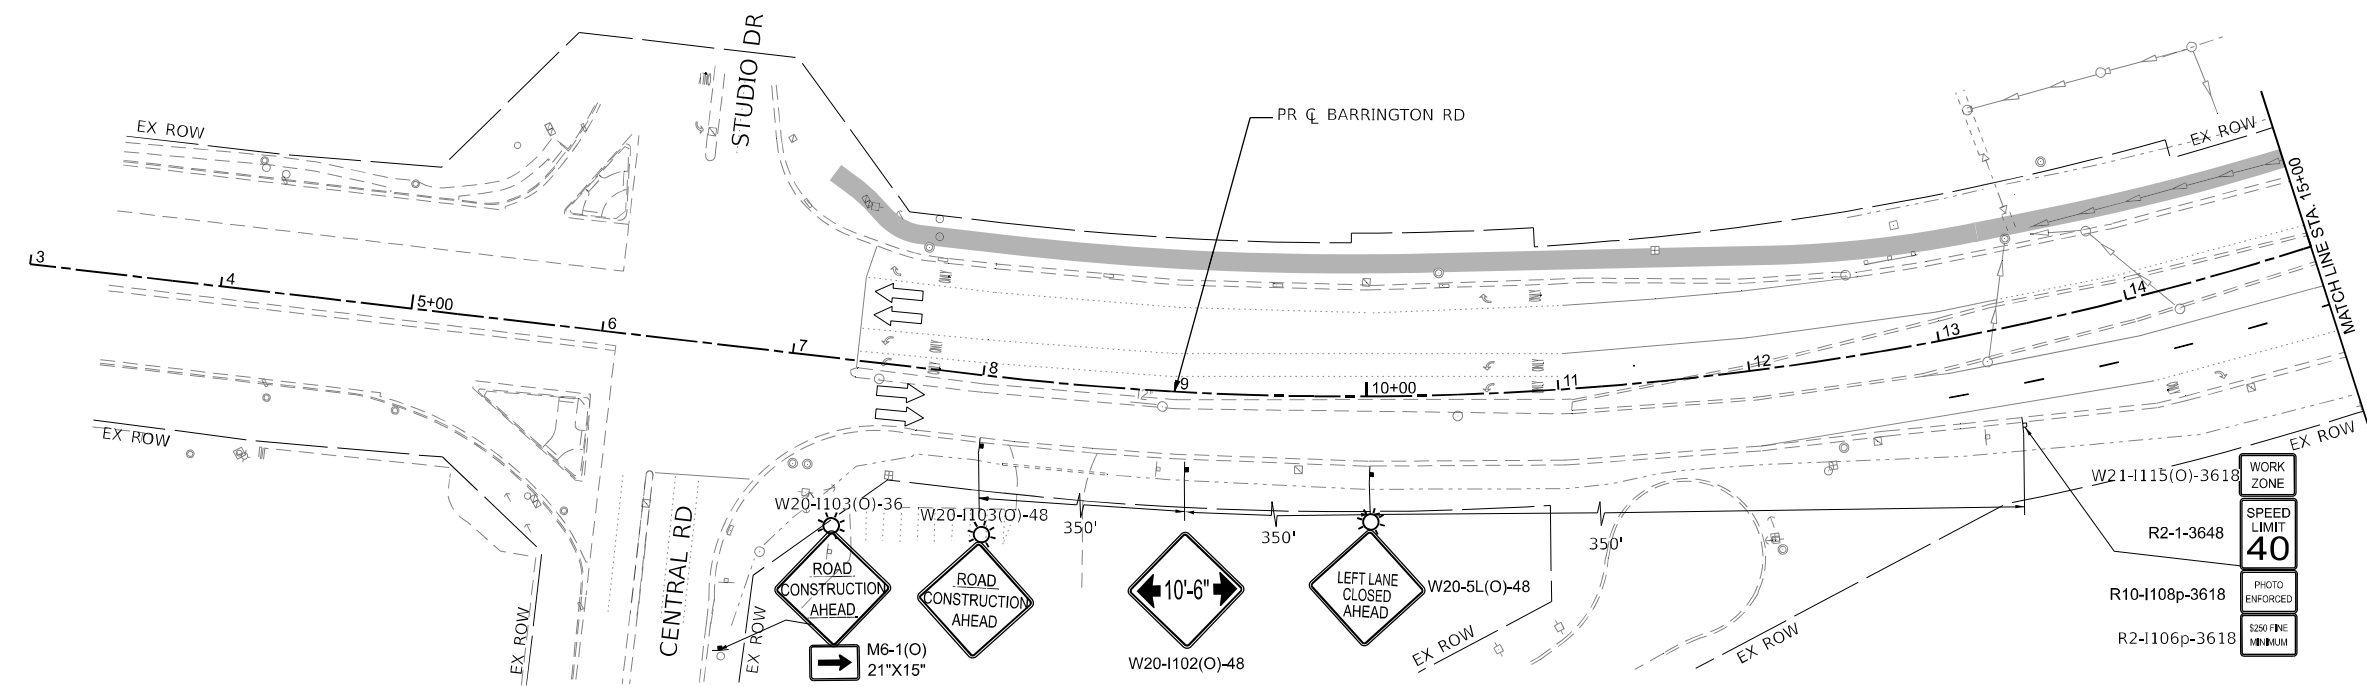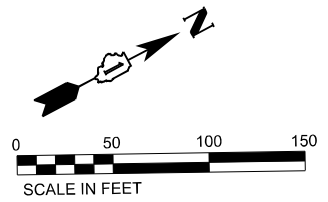

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▨	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⊙	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISOR -	
PLOT SCALE = 99.996' / in.	CHECKED - MM	REVISOR -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISOR -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 3		
SCALE:	SHEET 59 OF 73 SHEETS	STA. 3+00 TO STA. 15+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 142
ILLINOIS FED. AID PROJECT CONTRACT NO. 62K33				

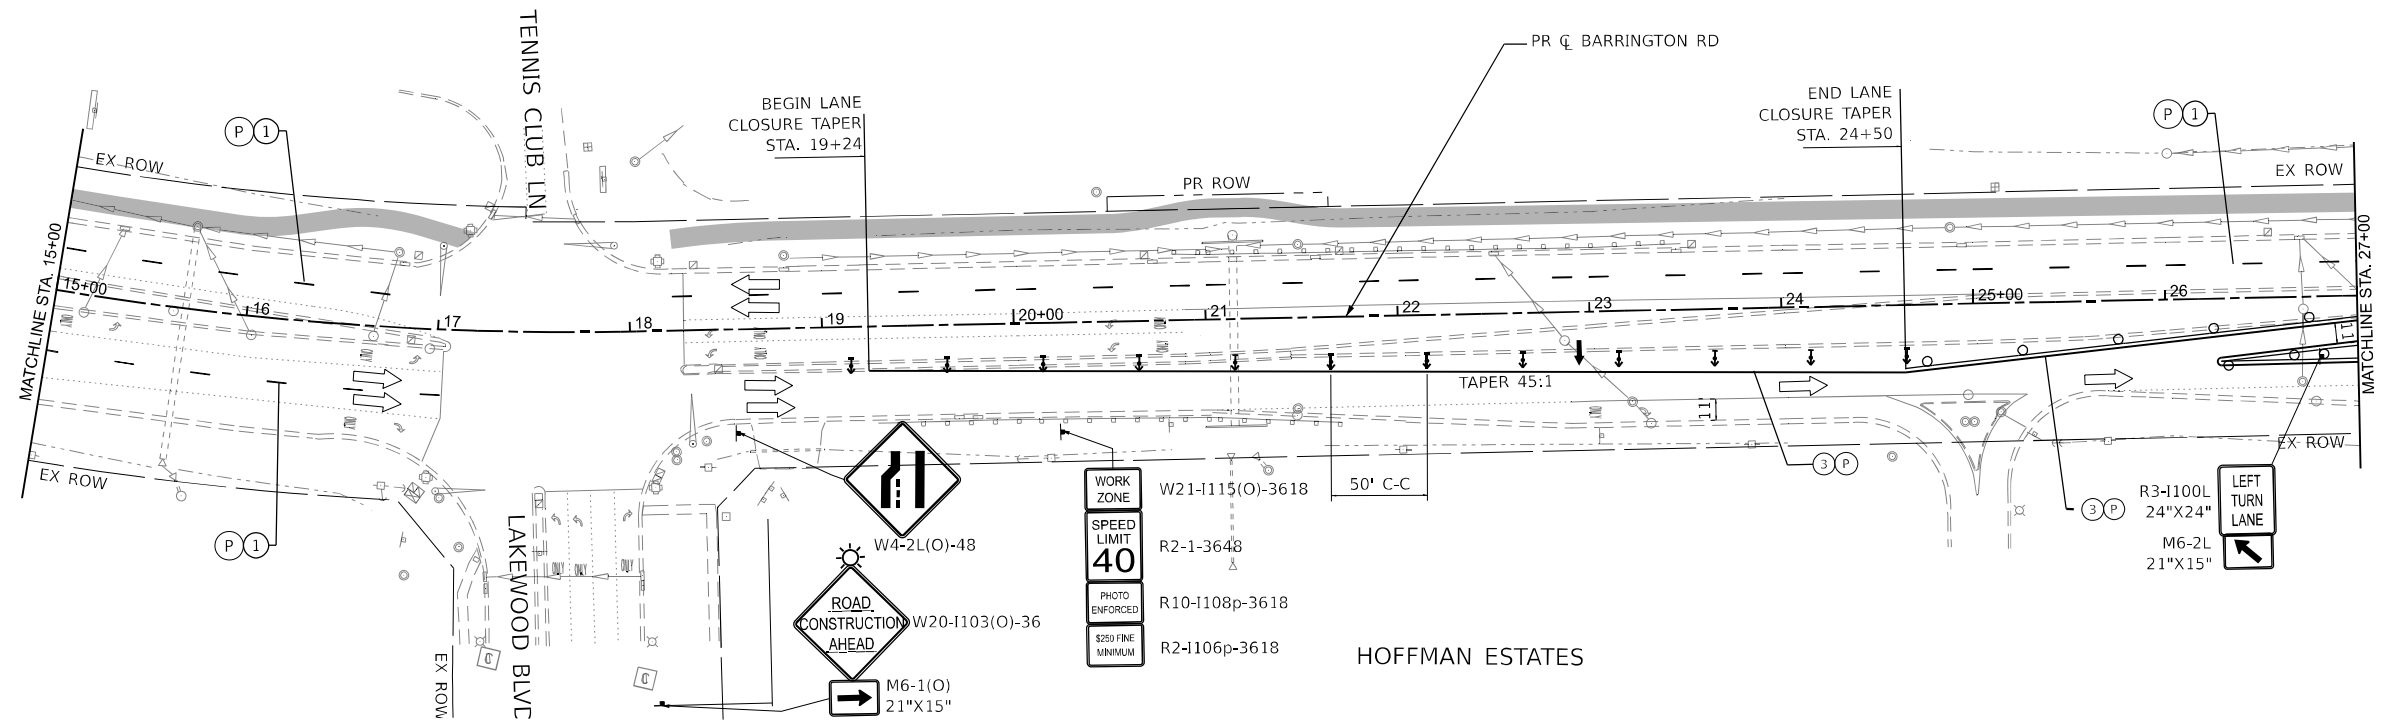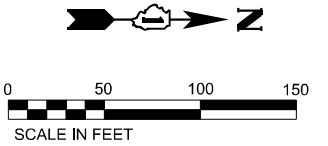

WORK ZONE	W21-I115(O)-3618	50' C-C
SPEED LIMIT	R2-1-3648	
PHOTO ENFORCED	R10-I108p-3618	
\$250 FINE MINIMUM	R2-I106p-3618	

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADI)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	DIRECTION INDICATOR BARRICADE @ 50' C-C
‡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
PLOT SCALE = 99.996' / in.	DRAWN - ML	REVISED -
PLOT DATE = 1/20/2026	CHECKED - MM	REVISED -
	DATE - 01/21/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 3		
SCALE:	SHEET 60 OF 73 SHEETS	STA. 15+00 TO STA. 27+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 143
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

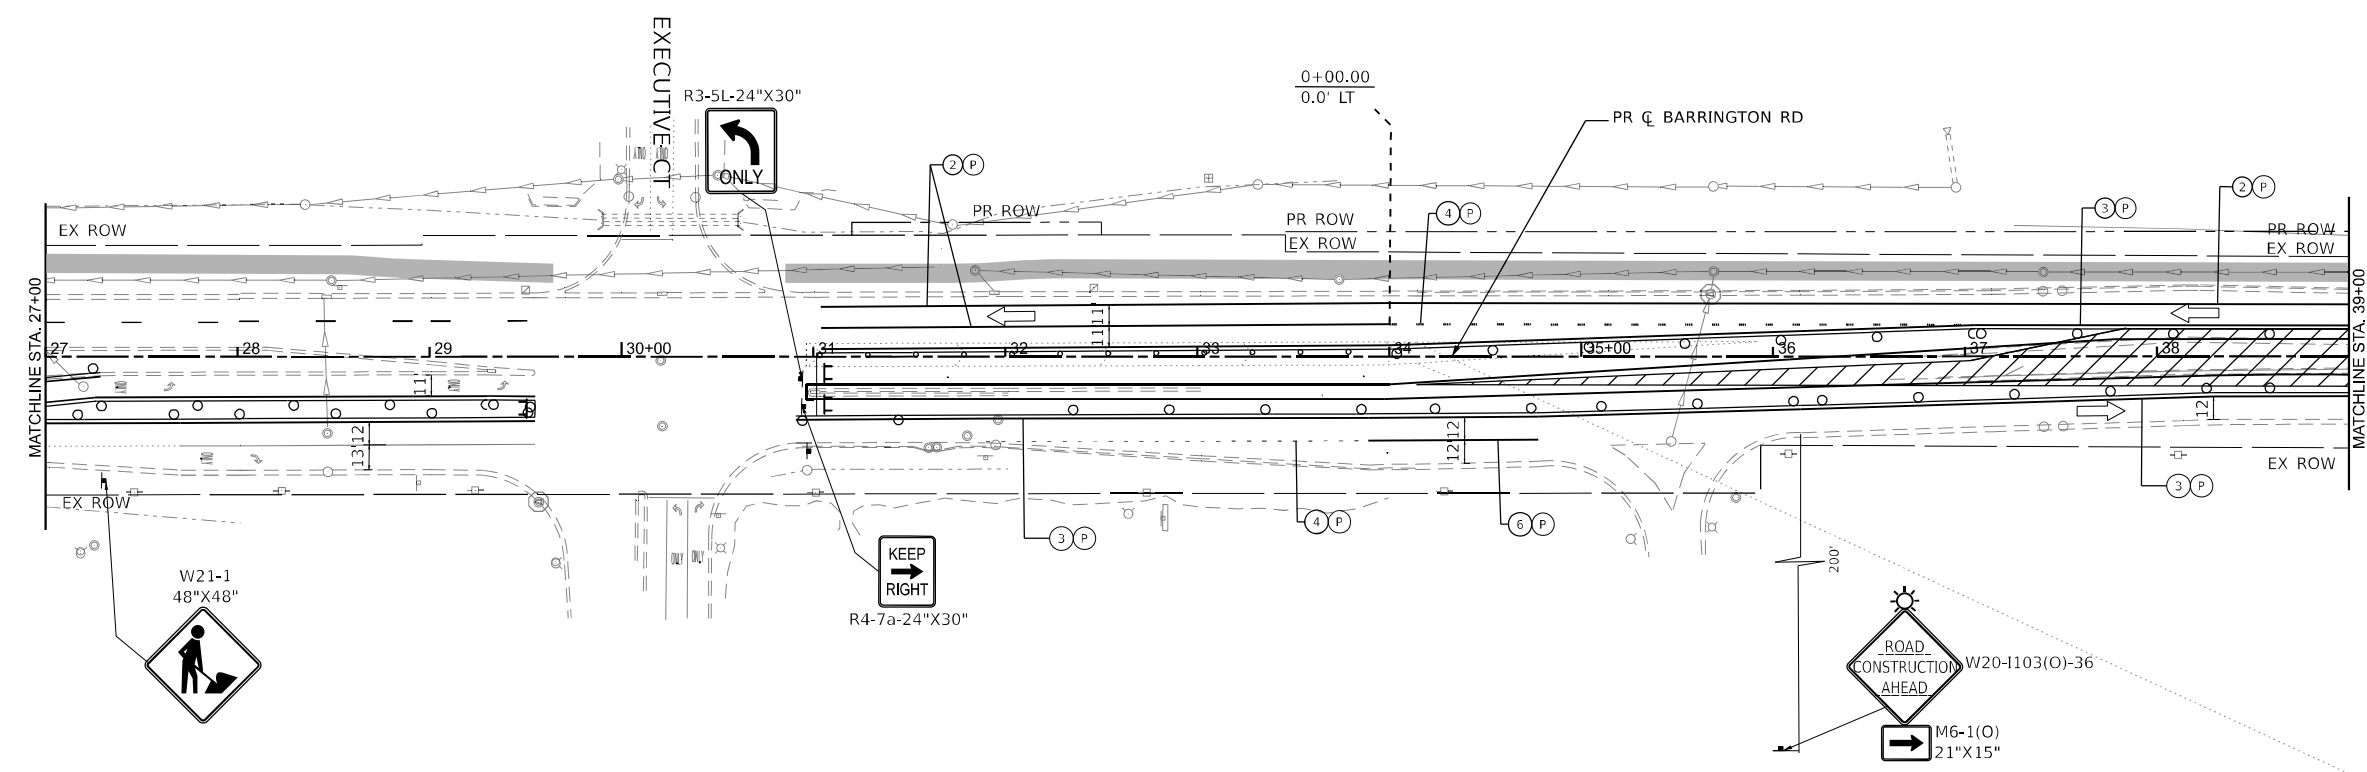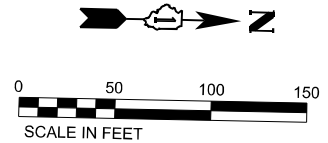

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	[Solid Grey]	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	[Diagonal Hatching]	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	[Cross-hatching]	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	[Diagonal Hatching]	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	[Vertical Lines]	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	[Symbol]	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	[Symbol]	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	[Symbol]	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	[Symbol]	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	[Symbol]	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	[Symbol]	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	[Symbol]	DIRECTION INDICATOR BARRICADE @ 50' C-C
I	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	[Symbol]	ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISOR -	
PLOT SCALE = 99.998' / in.	CHECKED - MM	REVISOR -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISOR -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 3
 SCALE: SHEET 61 OF 73 SHEETS STA. 27+00 TO STA. 39+00

F.A.P. RTE. = 362	SECTION = 2019-161-W	COUNTY = COOK	TOTAL SHEETS = 666	SHEET NO. = 144
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

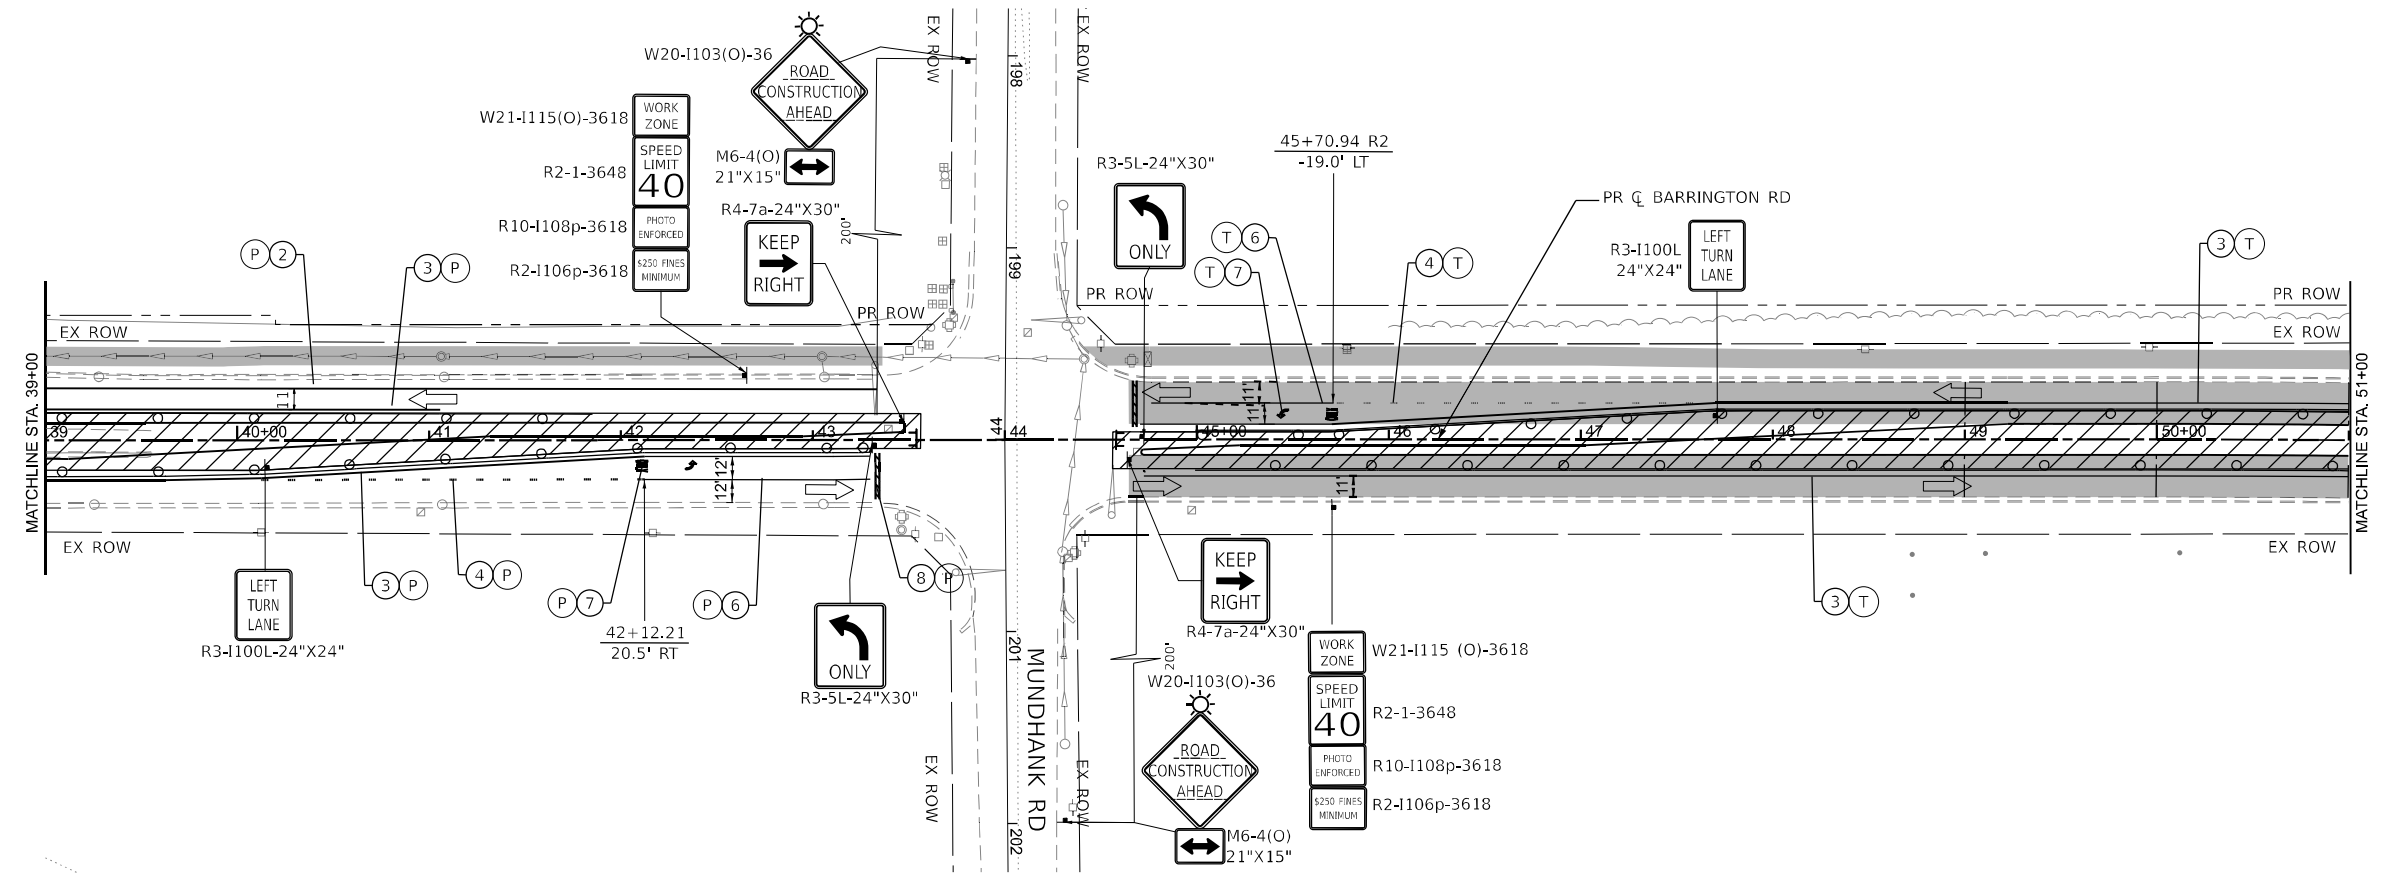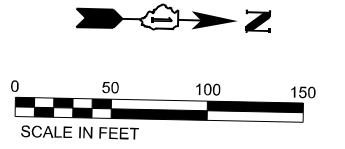

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▬ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▬ TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡ TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	⚡ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD

MODEL: D:\info\...
 FILE NAME: ...
 PROJECT: ...
 SHEET: ...



	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	DRAWN - ML	CHECKED - MM	REVISED - _____
	PLOT SCALE = 99,998' / in.	DATE - 01/21/2026	REVISED - _____
	PLOT DATE = 1/20/2026		REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 3

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 145
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

SCALE: SHEET 62 OF 73 SHEETS STA. 39+00 TO STA. 51+00

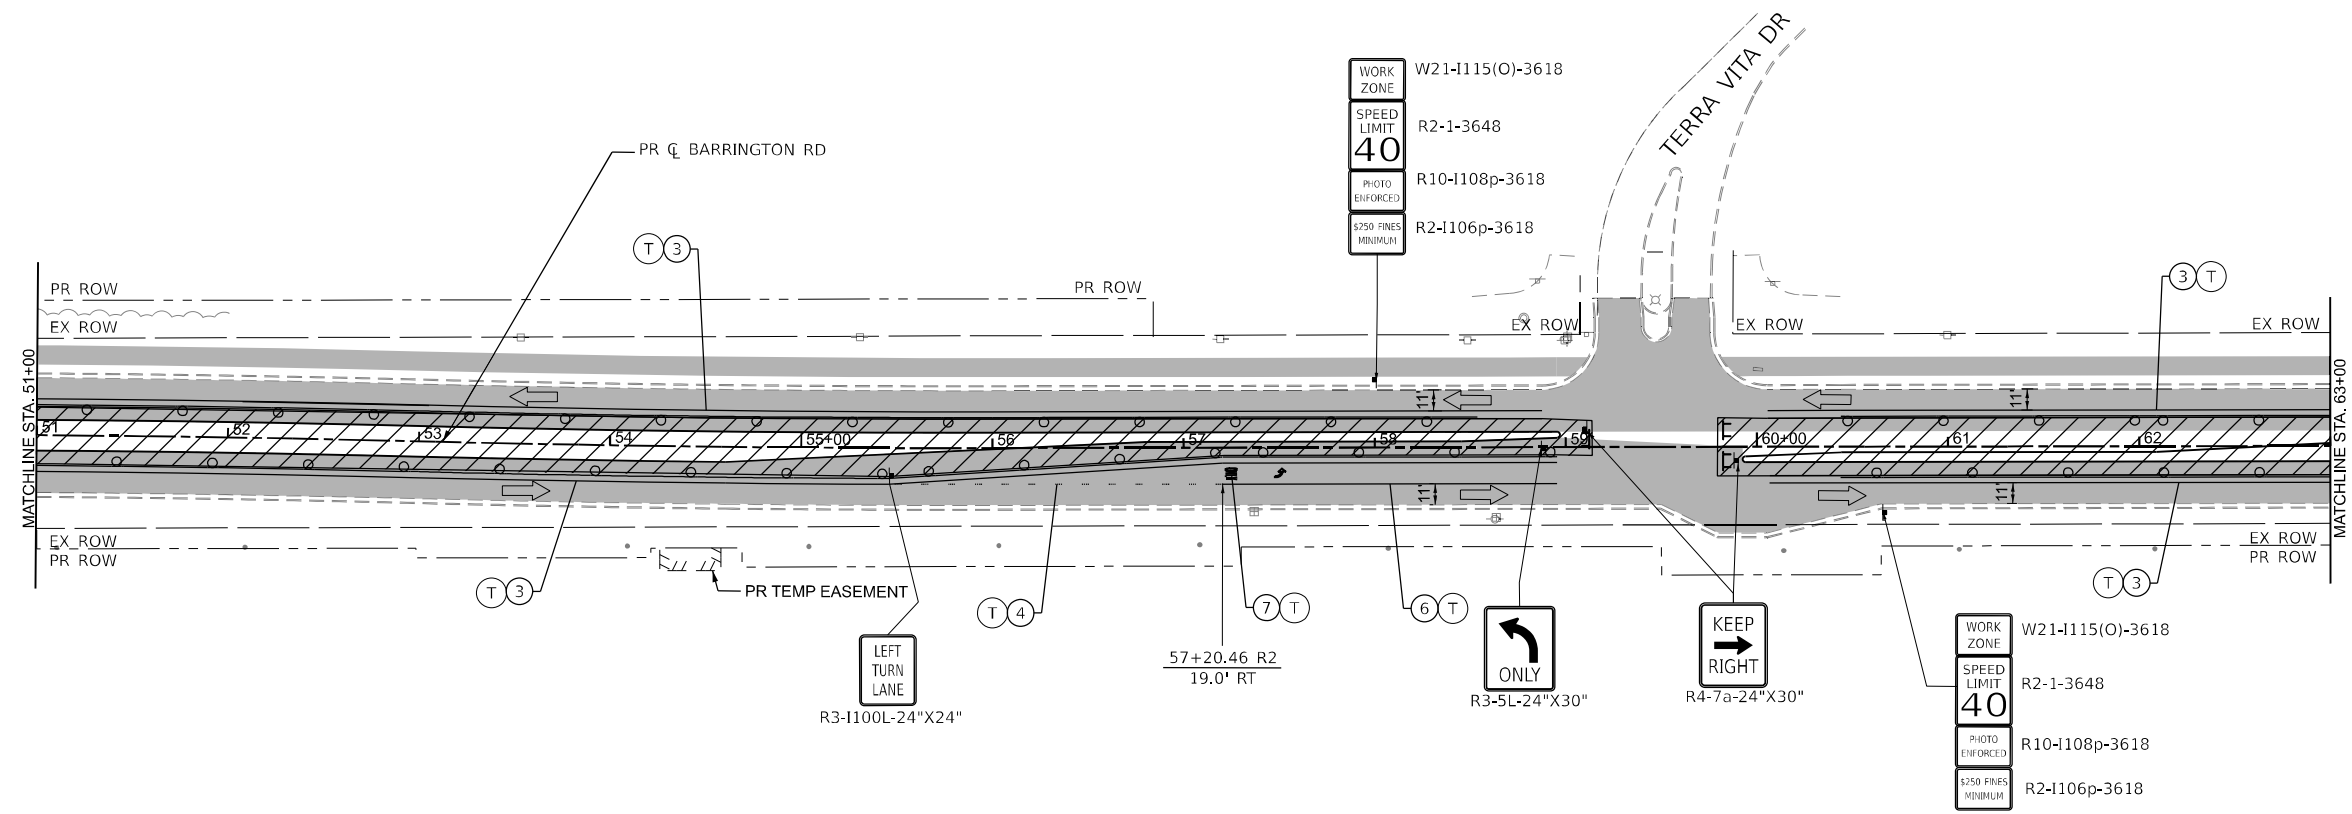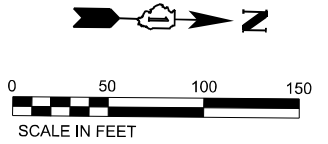

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚠ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▬ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚓ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⦿ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▬ TEMPORARY CONCRETE BARRIER
Ⓣ TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡ TRAFFIC DIRECTION ARROW
Ⓟ TEMPORARY PAVEMENT MARKING - PAINT	⚡ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD



MODEL: Default
 FILE NAME: I:\projects\2026\transp\scorp\com\transp\scorp\paw\T\Documents\Projects_2026\CH401401200018\CAD\02 - Sheets\05-MOT\Stage_3\016K33_MOT_Sheet 5

OSEH inc.	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	PLOT SCALE = 100.418 * / in.	DRAWN - ML	REVISED - _____
	PLOT DATE = 1/20/2026	CHECKED - MM	REVISED - _____
		DATE - 01/21/2026	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 3	
SCALE:	SHEET 63 OF 73 SHEETS
STA. 51+00	TO STA. 63+00

F.A.P. RIE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 146
CONTRACT NO. 62K33				ILLINOIS FED. AID PROJECT

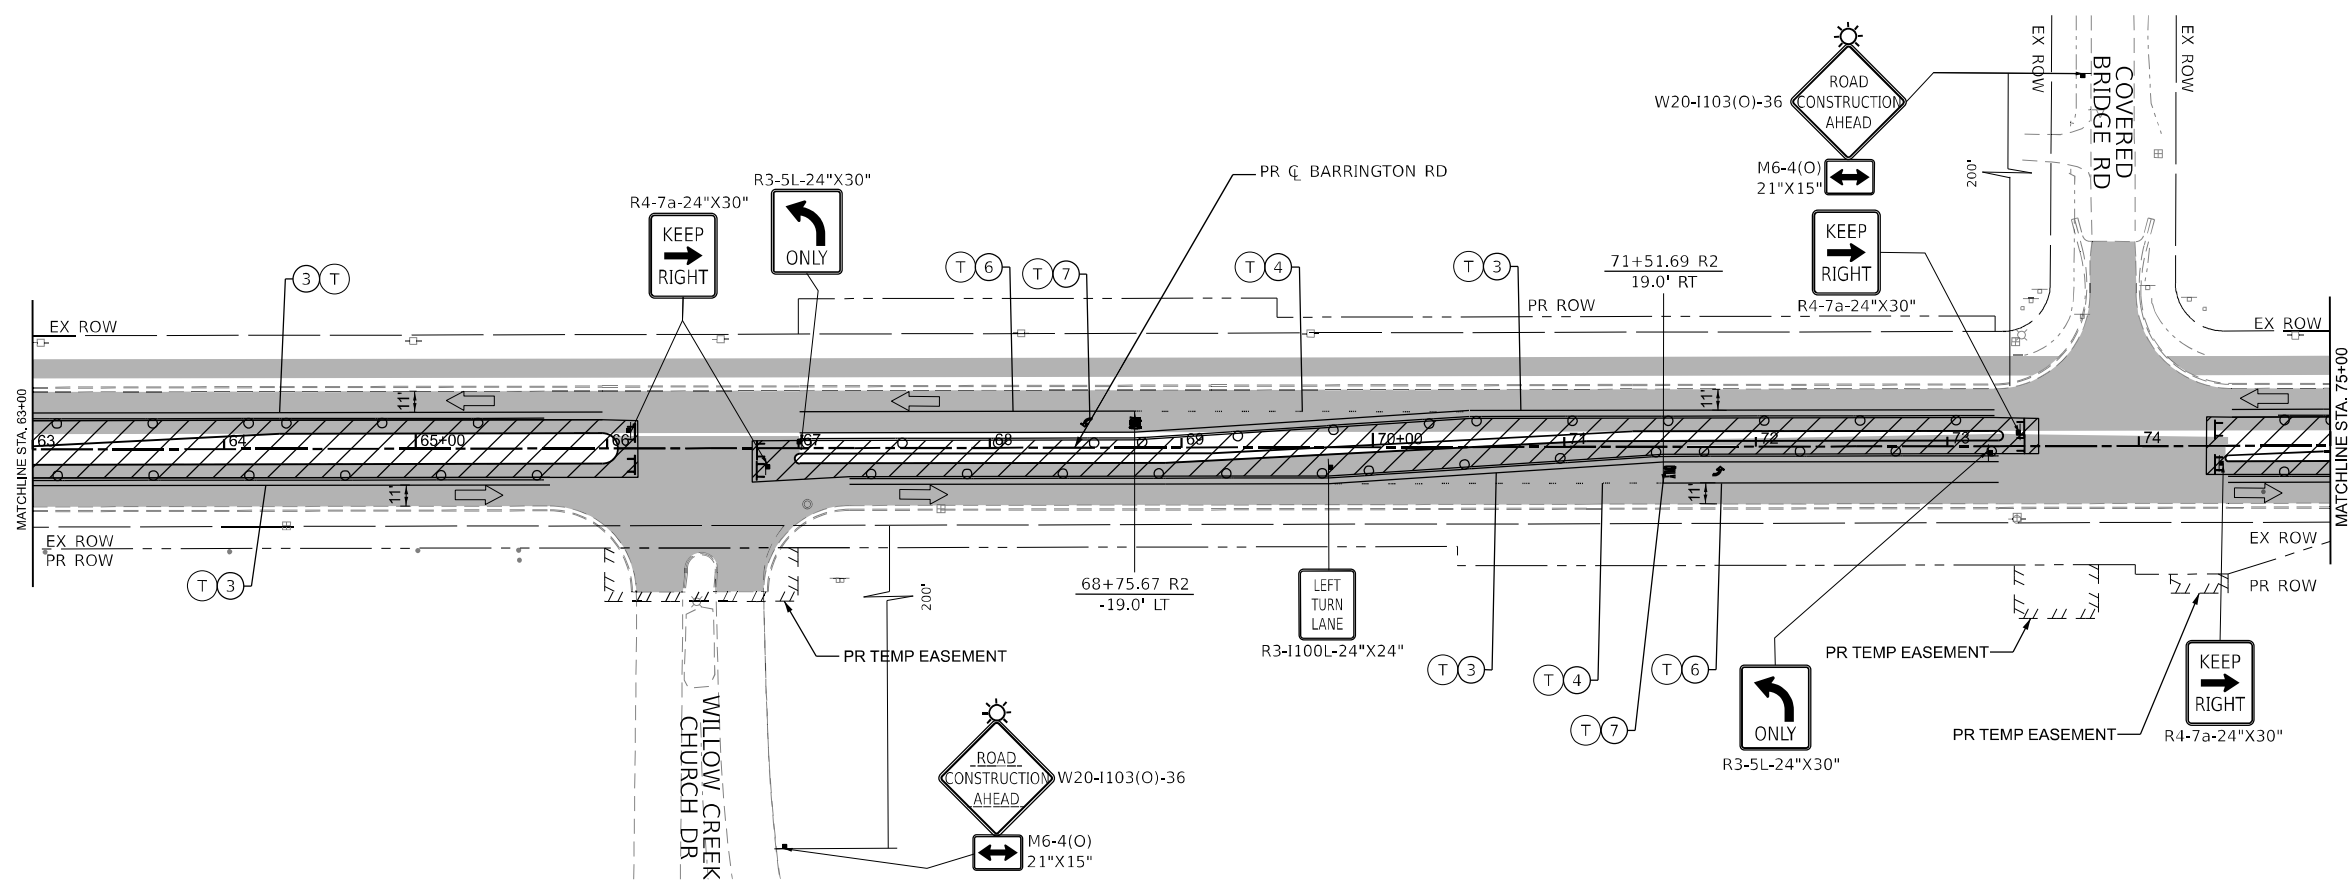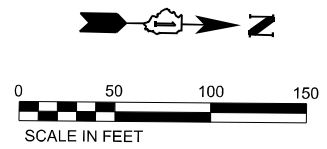

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	[Solid Grey]	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	[Diagonal Hatching]	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	[Cross-hatching]	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	[Diagonal Hatching]	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	[Vertical Lines]	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	[Type III Barricade]	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	[Double Vertical Panels]	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	[Proposed Sign Post]	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	[Construction Drums]	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	[Temporary Concrete Barrier]	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	[Traffic Direction Arrow]	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	[Direction Indicator Barricade]	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	[Arrow Board]	ARROW BOARD

MODEL: D:\file1... FILE NAME: ... SHEETS: 08-MOT-Stage 3-D-62K33_MOT_Sheet 5





USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	CHECKED - MM	REVISED -
PLOT SCALE = 100.245' / in.	DATE - 01/21/2026	REVISED -
PLOT DATE = 1/20/2026		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 3		
SCALE:	SHEET 64 OF 73 SHEETS	STA. 63+00 TO STA. 75+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	147
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

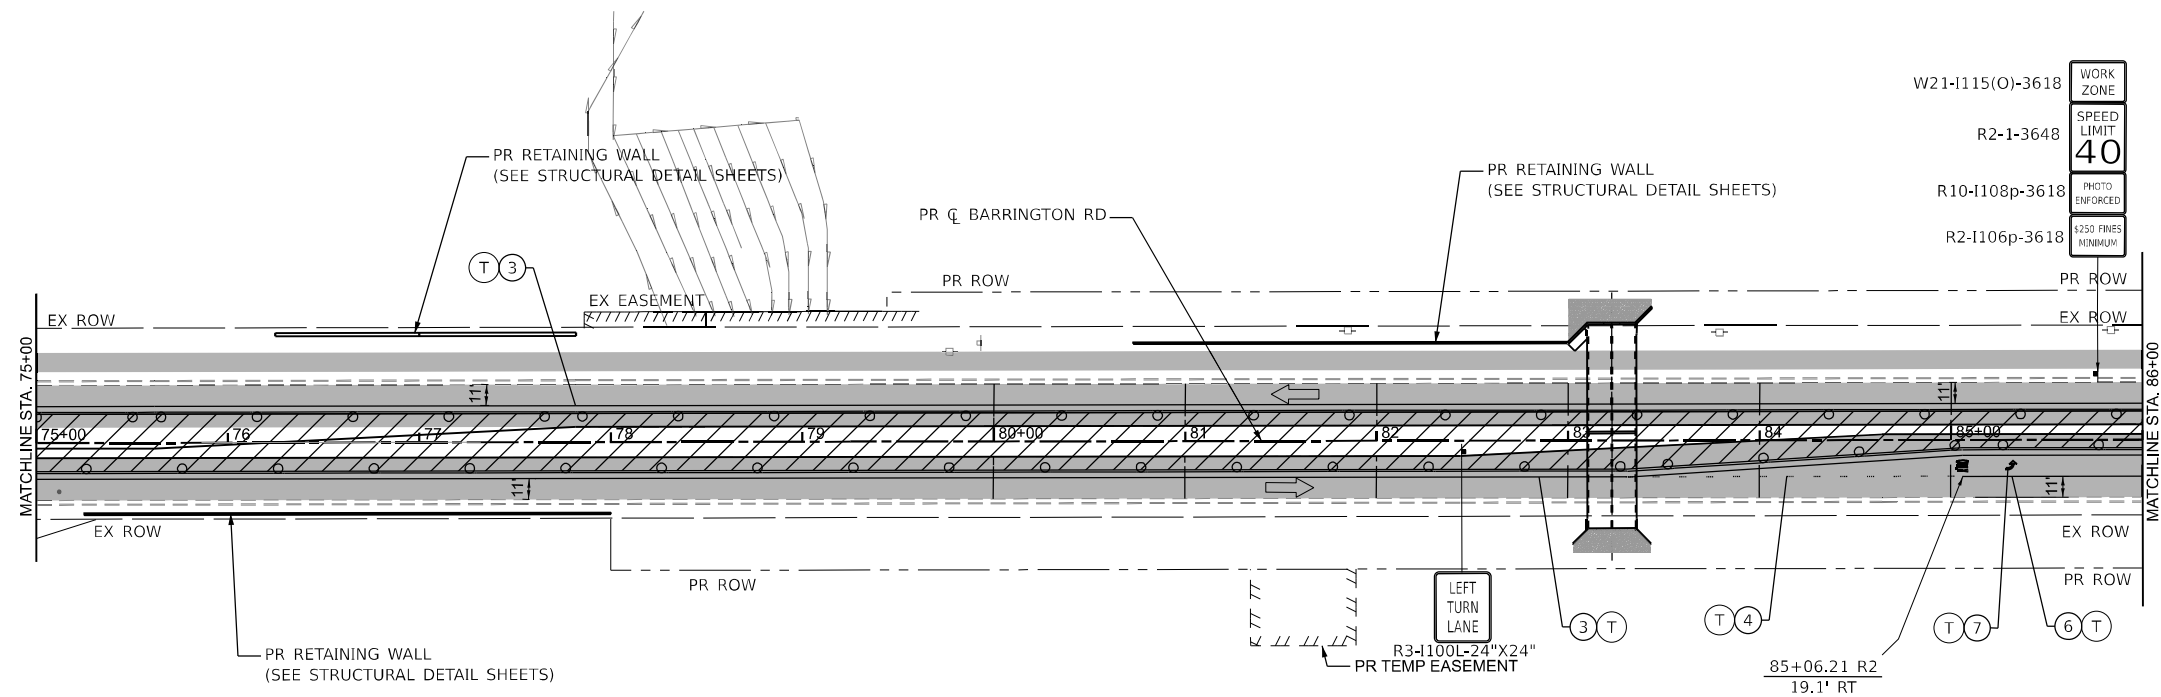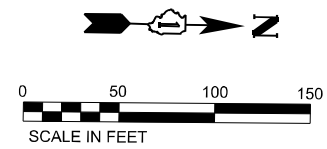



W21-1115(O)-3618	WORK ZONE
R2-1-3648	SPEED LIMIT
R10-1108p-3618	PHOTO ENFORCED
R2-1106p-3618	\$250 FINES MINIMUM
40	

LEGEND

① PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■ COMPLETED PAVEMENT
② PAVEMENT MARKING - LINE 4" - WHITE	▨ WORK AREA
③ PAVEMENT MARKING - LINE 4" - YELLOW	▩ TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④ PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧ TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤ PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤ IMPACT ATTENUATOR
⑥ PAVEMENT MARKING - LINE 6" - WHITE	⚡ TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦ PAVEMENT MARKING - LETTERS AND SYMBOLS	▬ DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧ PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡ PROPOSED SIGN POST
⑨ PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡ CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩ PAVEMENT MARKING - LINE 12" YELLOW	▬ TEMPORARY CONCRETE BARRIER
T TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	➡ TRAFFIC DIRECTION ARROW
P TEMPORARY PAVEMENT MARKING - PAINT	↑ DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡ TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑ ARROW BOARD

MODEL: D:\file11... FILE NAME: ... 3D: 12/23/2023... MOT: Sheet 7

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 3	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED - _____			362	2019-161-W	COOK	666	148
	PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED - _____			CONTRACT NO. 62K33		ILLINOIS FED. AID PROJECT		

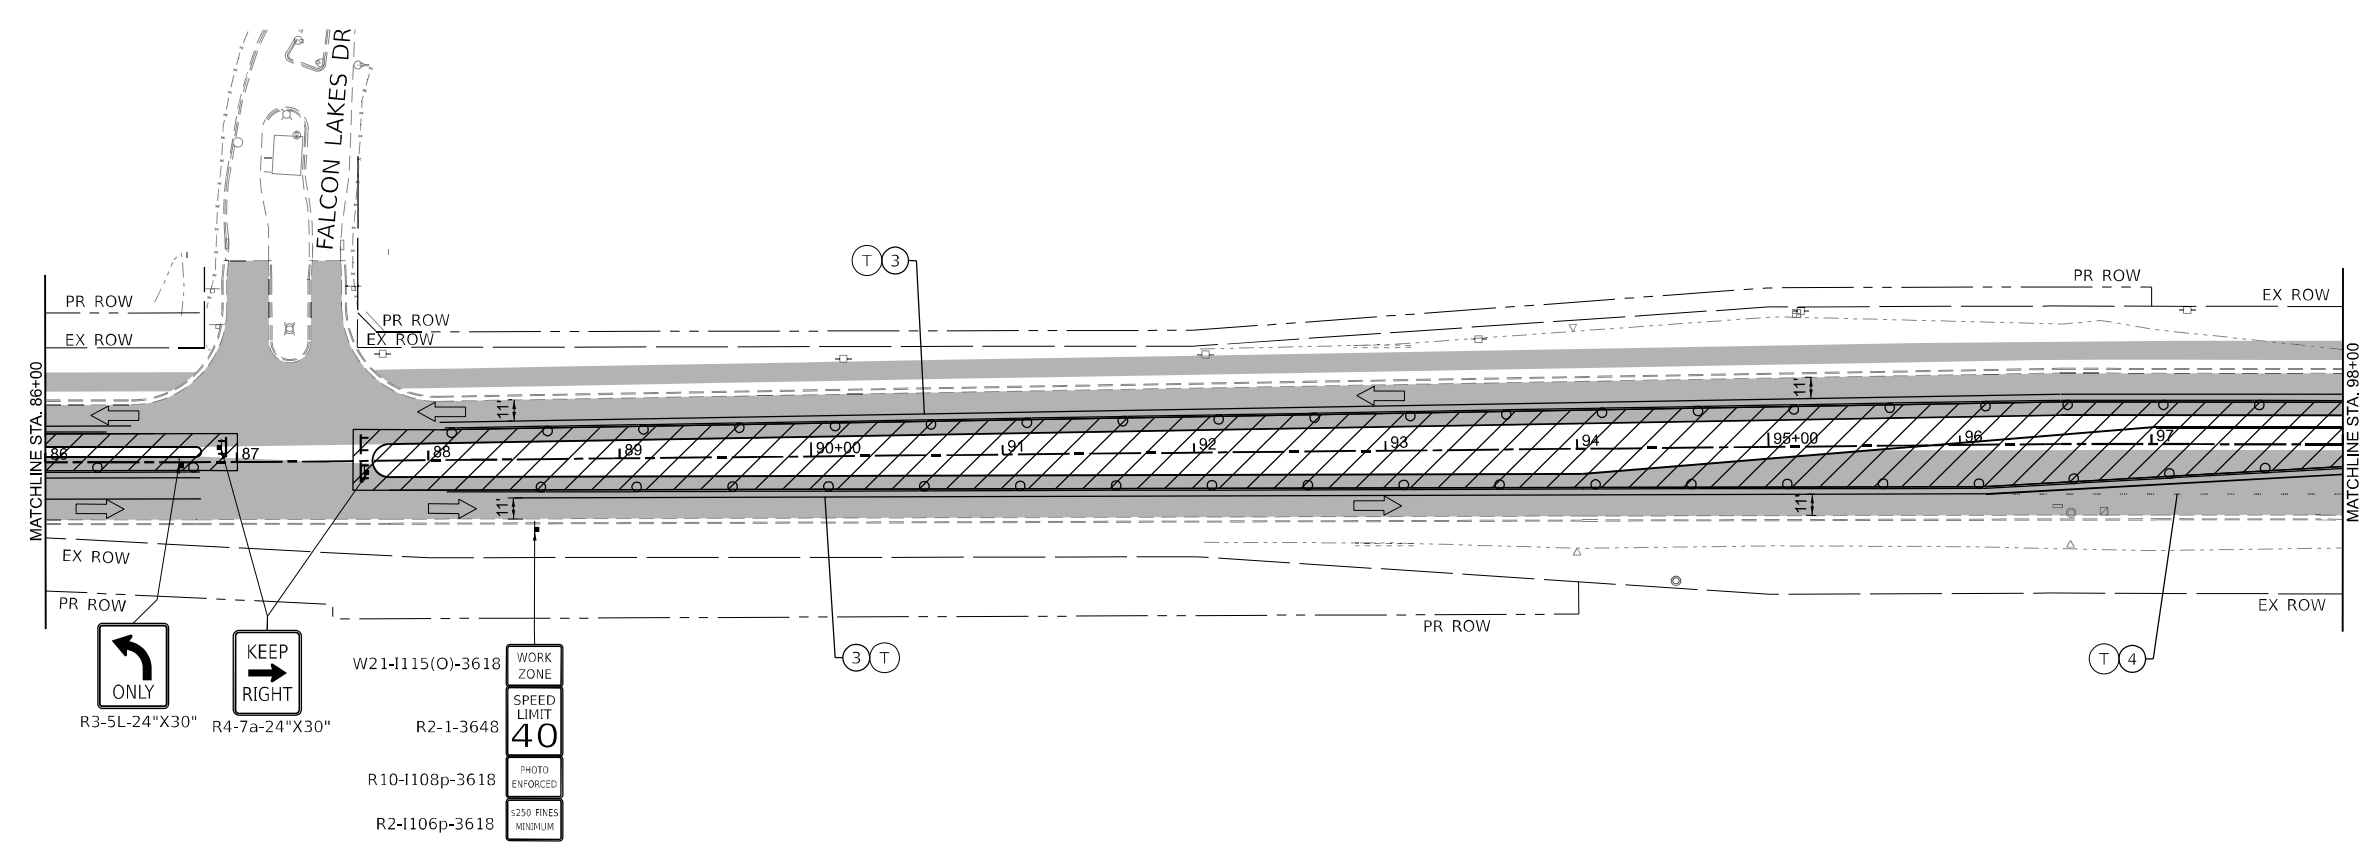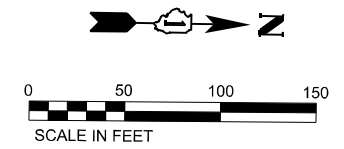



- R3-5L-24"X30" ONLY
- R4-7a-24"X30" KEEP RIGHT
- W21-1115(O)-3618 WORK ZONE
- R2-1-3648 SPEED LIMIT 40
- R10-1108p-3618 PHOTO ENFORCED
- R2-1106p-3618 \$250 FINES MEDIUM

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD

MODEL: D:\file1... FILE NAME: ... 3D: 12/23... MOT: Sheet 3

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 3	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED -			362	2019-161-W	COOK	666	149
	PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED -			CONTRACT NO. 62K33		ILLINOIS FED. AID PROJECT		

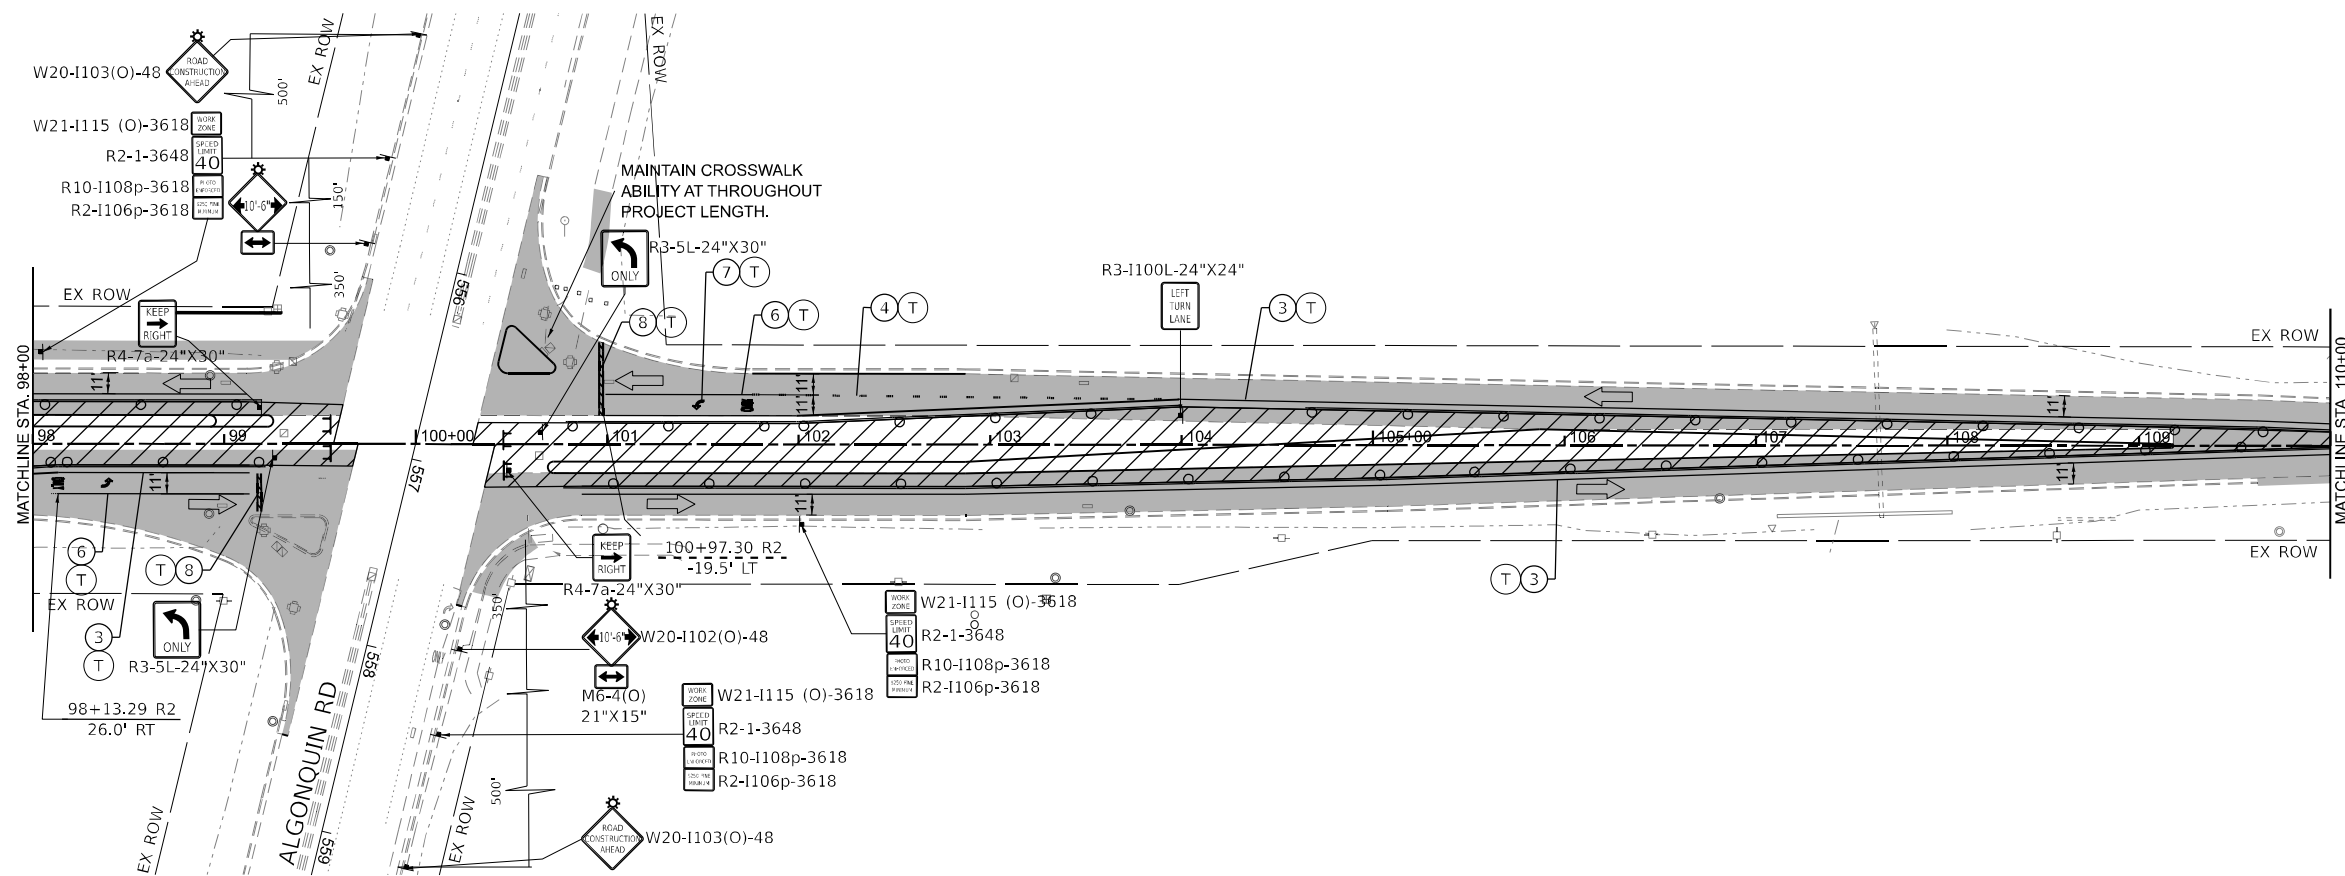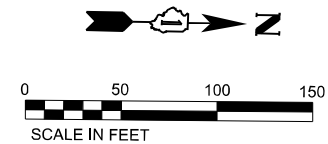

LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▩▩▩▩	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚠	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	↔	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑↑	ARROW BOARD

OSEH inc.
312 W. VAN BUREN ST.
 SUITE 300
 CHICAGO, IL 60607
 WWW.OSEHINC.COM

USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	DRAWN - ML	REVISED - _____
PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED - _____
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED - _____



**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - STAGE 3

SCALE: SHEET **67** OF 73 SHEETS STA. **98+00** TO STA. **110+00**

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	150
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

MODEL: D:\edit FILE NAME: ... 2020\CH40140140120018\CD\02 - Sheets\08\07\Stage 3\162K33_MOT_Sheet 9

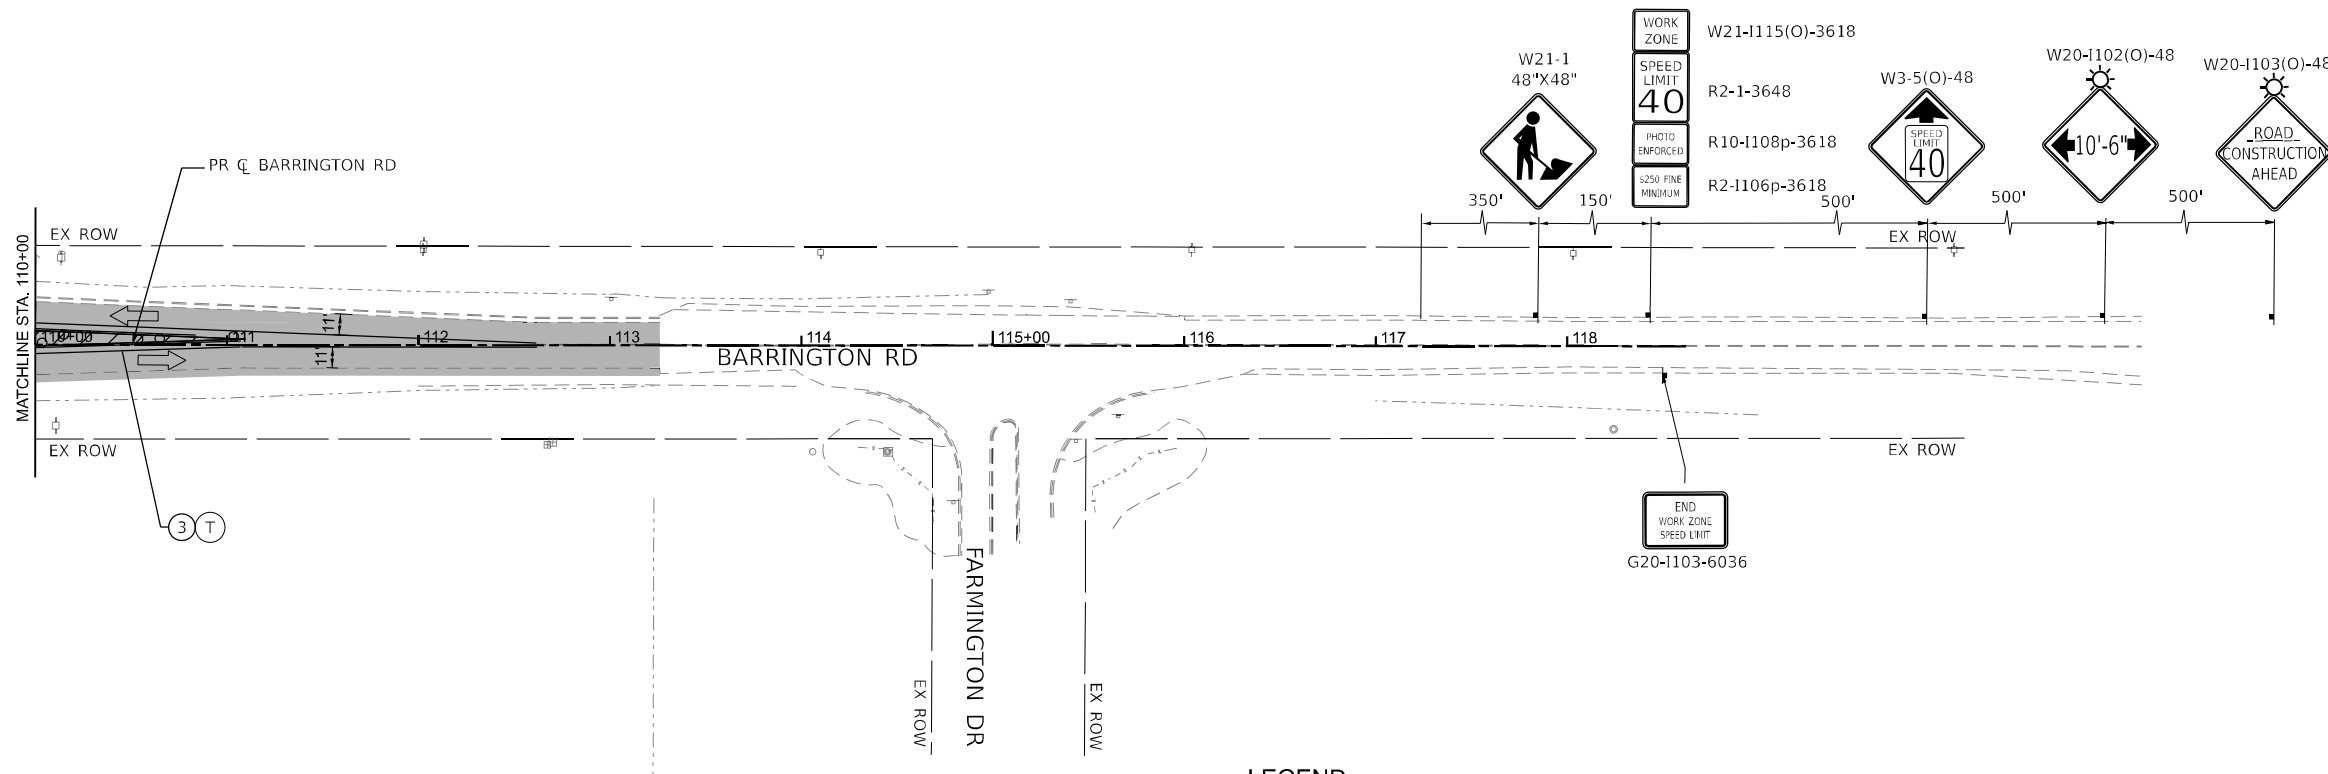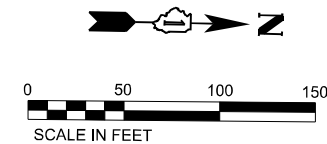



LEGEND

①	PAVEMENT MARKING - LINE 4" - WHITE 30FT SKIP, 10FT DASH LINE	■	COMPLETED PAVEMENT
②	PAVEMENT MARKING - LINE 4" - WHITE	▨	WORK AREA
③	PAVEMENT MARKING - LINE 4" - YELLOW	▩	TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
④	PAVEMENT MARKING - LINE 6" - WHITE 6FT SKIP, 2FT DASH LINE	▧	TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)
⑤	PAVEMENT MARKING - LINE 4" - DOUBLE YELLOW @ 11" C-C	▤	IMPACT ATTENUATOR
⑥	PAVEMENT MARKING - LINE 6" - WHITE	⚡	TYPE III BARRICADES WITH TWO FLASHING AMBER LIGHTS ON EACH
⑦	PAVEMENT MARKING - LETTERS AND SYMBOLS	▬	DOUBLE VERTICAL PANELS @ 100' C-C (TANGENTS), & 50' C-C (TAPERS)
⑧	PAVEMENT MARKING - 24" WHITE, SOLID STOP BAR	⚡	PROPOSED SIGN POST
⑨	PAVEMENT MARKING TO BE MAINTAINED FROM PREVIOUS STAGE	⚡	CONSTRUCTION DRUMS @ 50' C-C (TANGENTS), 25' C-C (TAPERS), & 10' C-C (RADII)
⑩	PAVEMENT MARKING - LINE 12" YELLOW	▬	TEMPORARY CONCRETE BARRIER
T	TEMPORARY PAVEMENT MARKING - TYPE IV TAPE	←	TRAFFIC DIRECTION ARROW
P	TEMPORARY PAVEMENT MARKING - PAINT	↑	DIRECTION INDICATOR BARRICADE @ 50' C-C
⚡	TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE	↑	ARROW BOARD


MODEL: D:\default... FILE NAME: ... PROJECT: ... SHEET: 68 OF 73

	USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC BARRINGTON RD - STAGE 3		F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	PLOT SCALE = 100.245' / in.	CHECKED - MM	REVISED - _____		362	2019-161-W	COOK	666	151	CONTRACT NO. 62K33		
	PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED - _____		SCALE:	SHEET 68 OF 73 SHEETS	STA. 110+00 TO STA. 118+00	ILLINOIS FED. AID PROJECT				


INTERSECTION STAGING

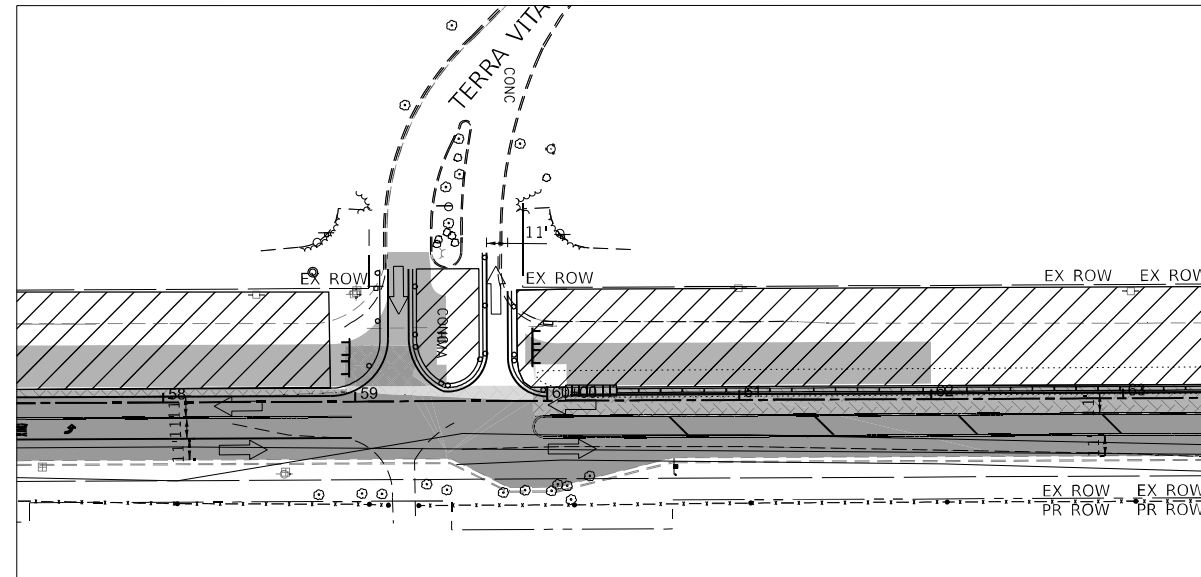

BARRINGTON RD
TERRA VITA DR
STAGE 2A

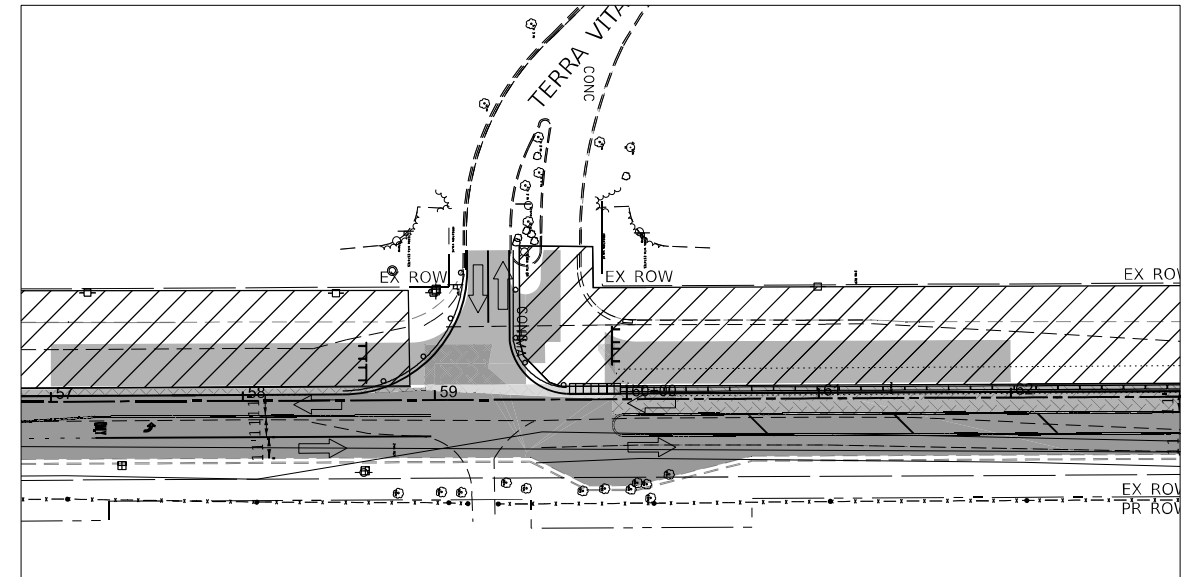

BARRINGTON RD
TERRA VITA DR
STAGE 2B

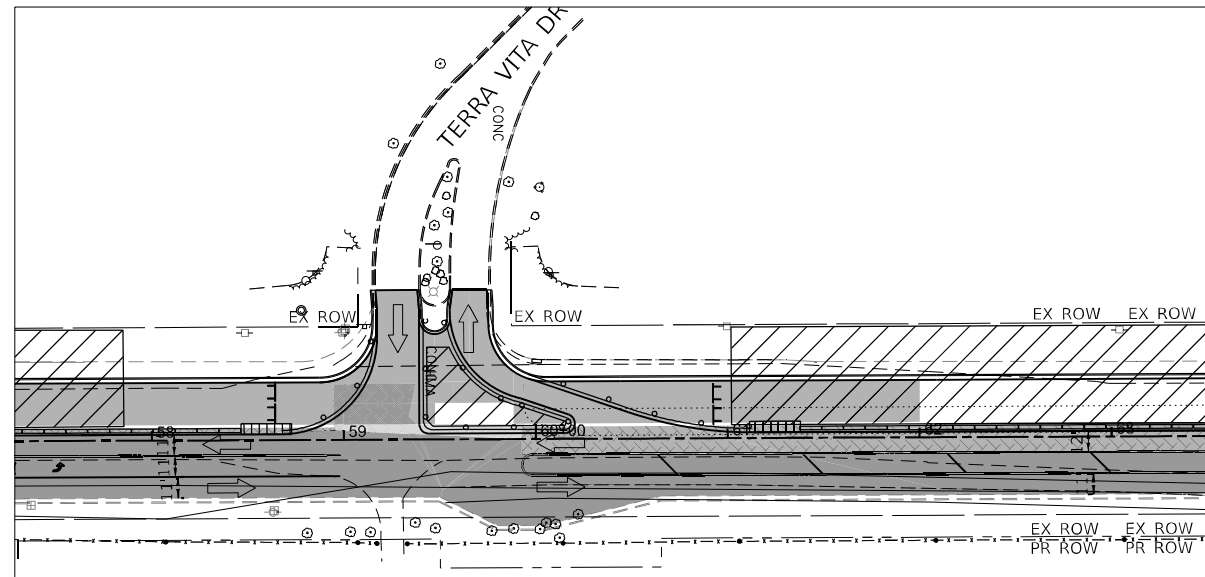

BARRINGTON RD
TERRA VITA DR
STAGE 2C

LEGEND

- COMPLETED PAVEMENT
- WORK AREA
- TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
- TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)

MODEL: D:\infra\...
 FILE NAME: ...
 2020\CH-401\01\2020\18\CADD\02 - Sheets\08-MOT\01-62K33_MOT_Sheet_69



USER NAME = AmulyaPusuluri
 PLOT SCALE = 99.996' / in.
 PLOT DATE = 1/20/2026

DESIGNED - AP
 DRAWN - ML
 CHECKED - MM
 DATE - 01/21/2026


REVISED - _____
 REVISED - _____
 REVISED - _____
 REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
 BARRINGTON RD - INTERSECTION STAGING DETAILS

SCALE: NTS SHEET 69 OF 73 SHEETS STA. _____ TO STA. _____

F.A.P. RIE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	152
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

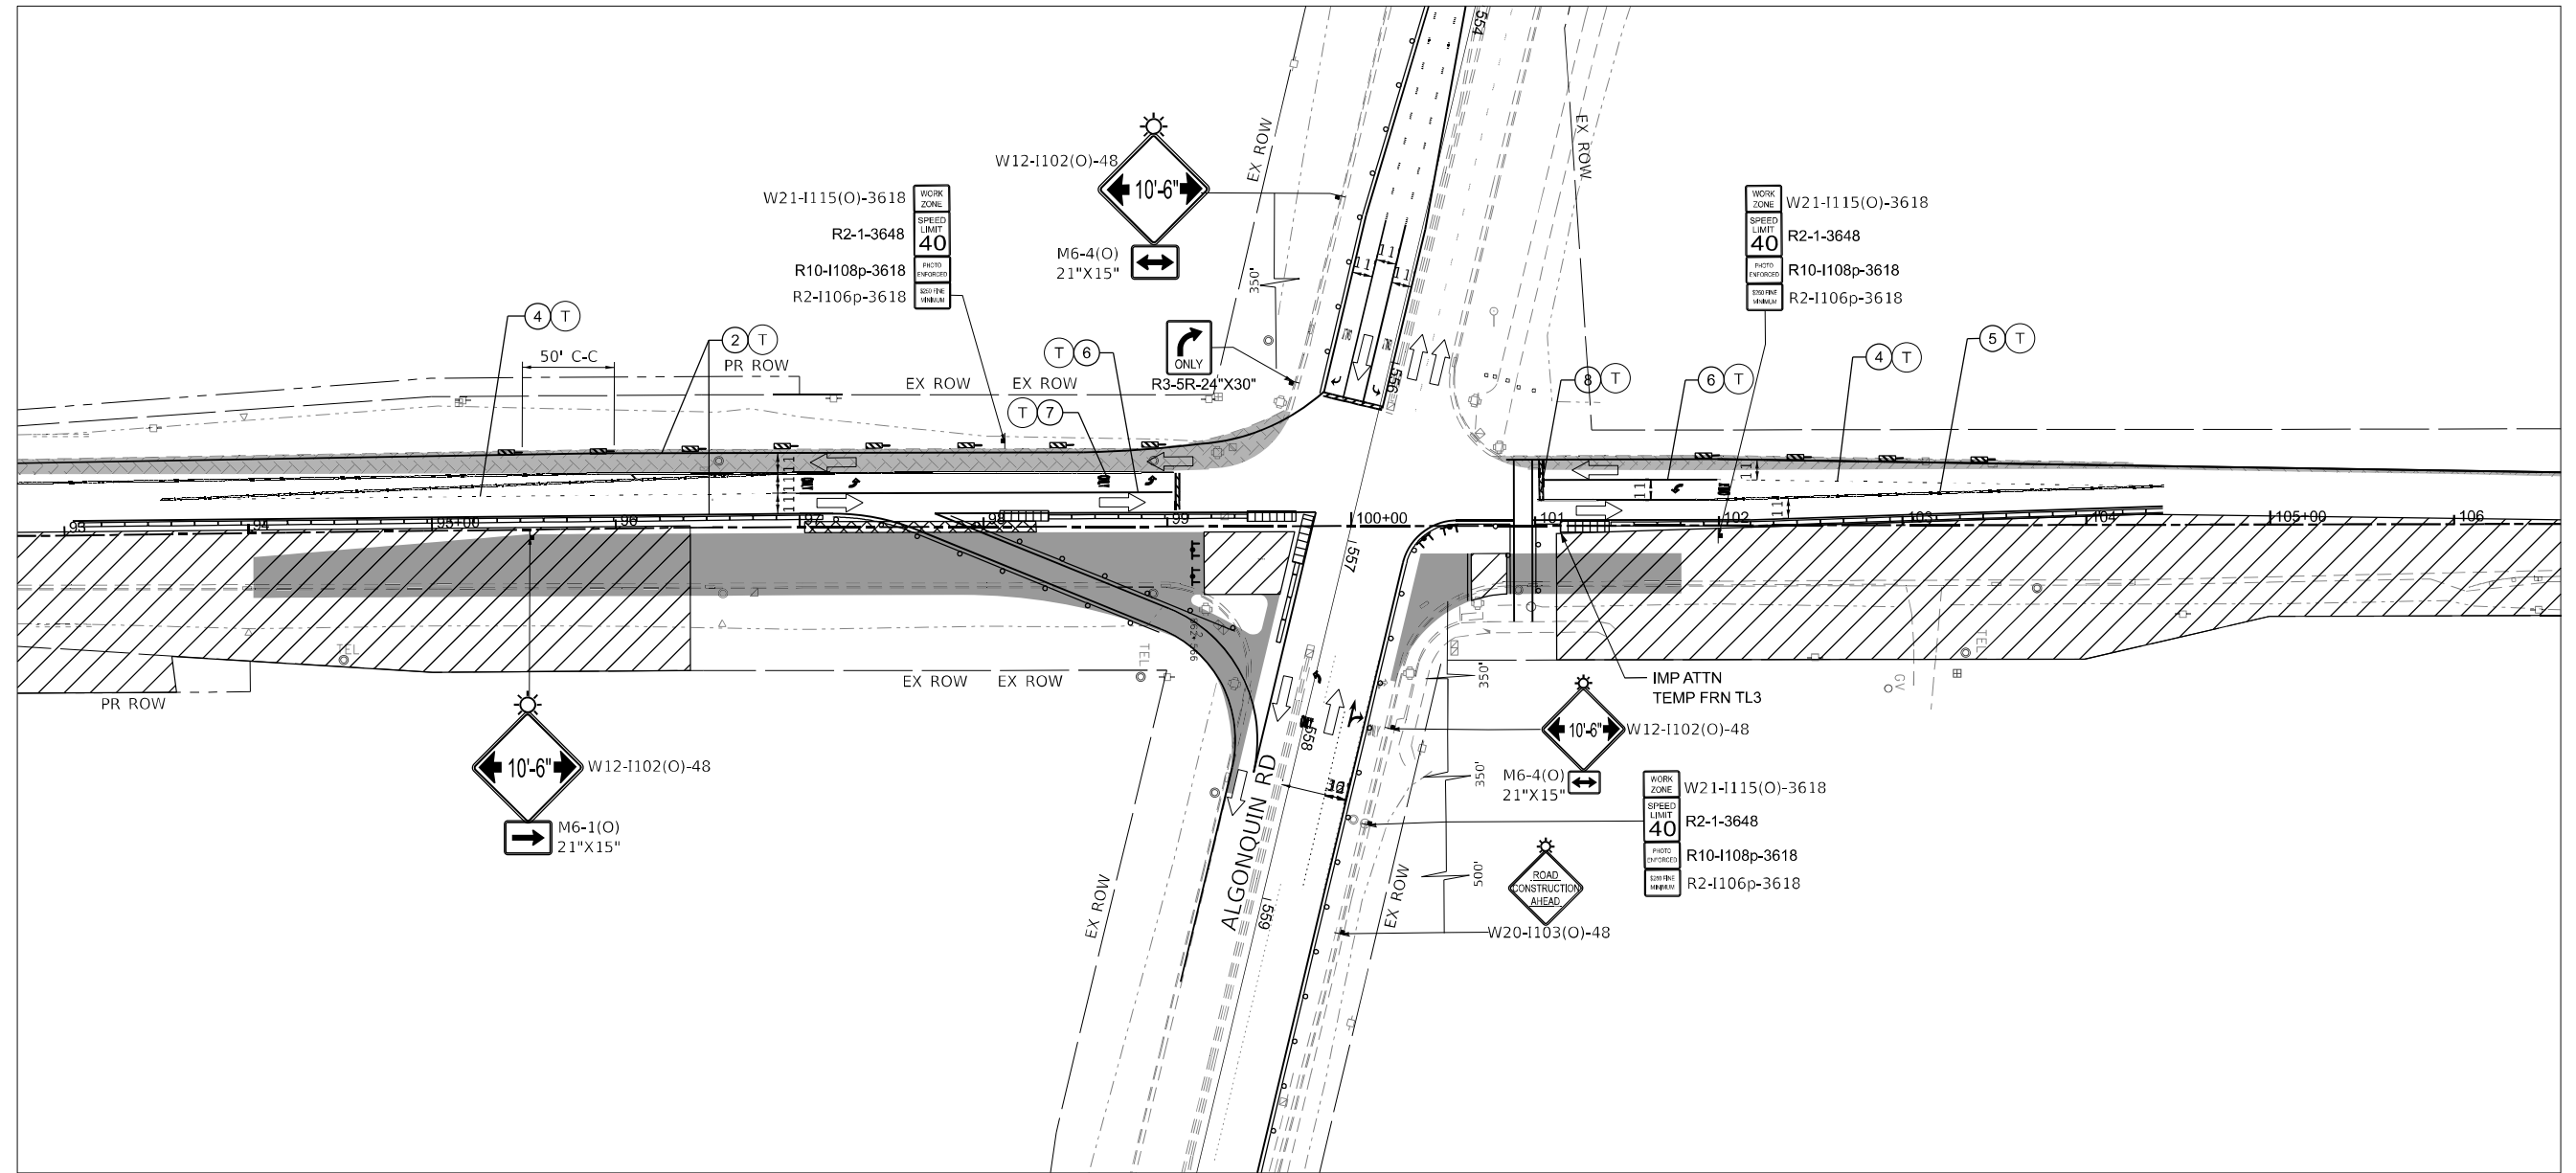

BARRINGTON RD AND ALGONQUIN RD
STAGE 1A

LEGEND

- COMPLETED PAVEMENT
- WORK AREA
- TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
- TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)

MODEL: D:\in\1...
 FILE NAME: ...
 PROJECT: ...
 SHEET: 70 OF 73




USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
DRAWN - ML	REVISIONS - _____	
PLOT SCALE = 99.996' / in.	CHECKED - MM	REVISIONS - _____
PLOT DATE = 1/19/2026	DATE - 01/21/2026	REVISIONS - _____


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC	
BARRINGTON RD - INTERSECTION STAGING DETAILS	
SCALE: NTS	SHEET 70 OF 73 SHEETS STA. TO STA.


F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 153
CONTRACT NO. 62K33				ILLINOIS FED. AID PROJECT

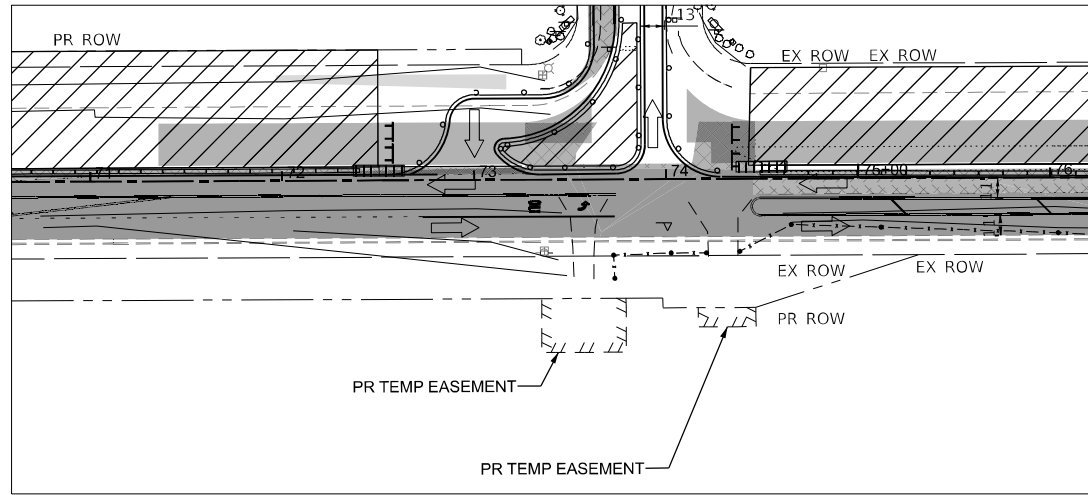


BARRINGTON RD
COVERED BRIDGE RD
STAGE 2A

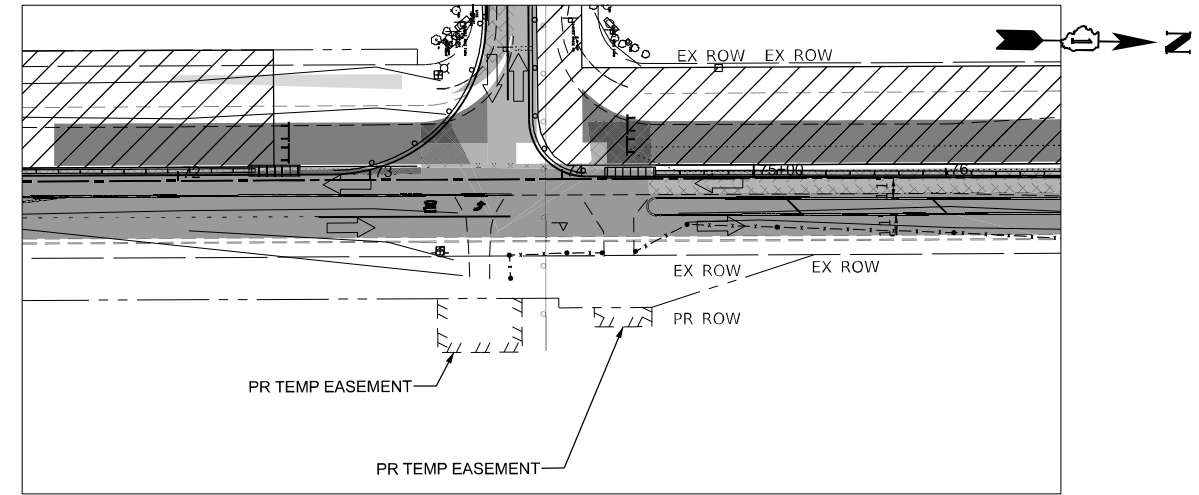

BARRINGTON RD
COVERED BRIDGE RD
STAGE 2B

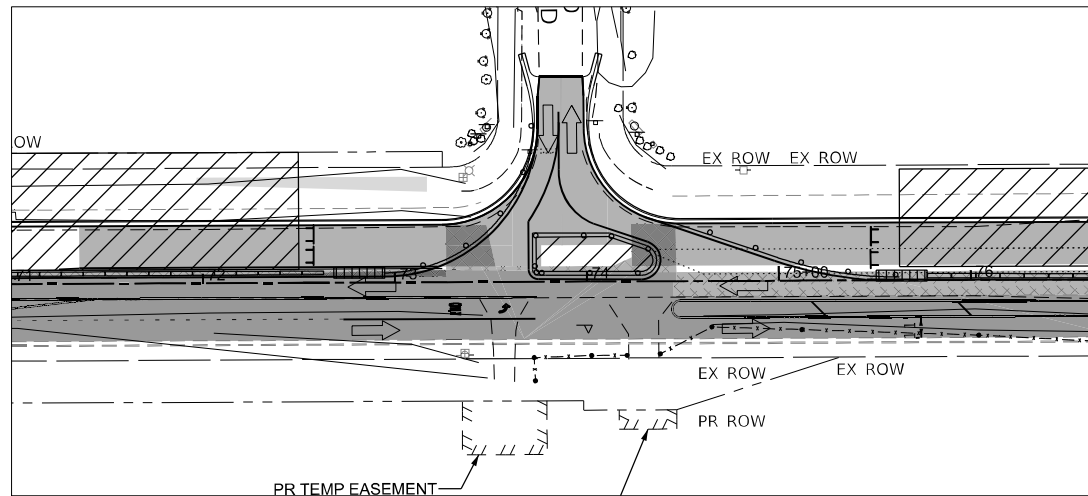

BARRINGTON RD
COVERED BRIDGE RD
STAGE 2C

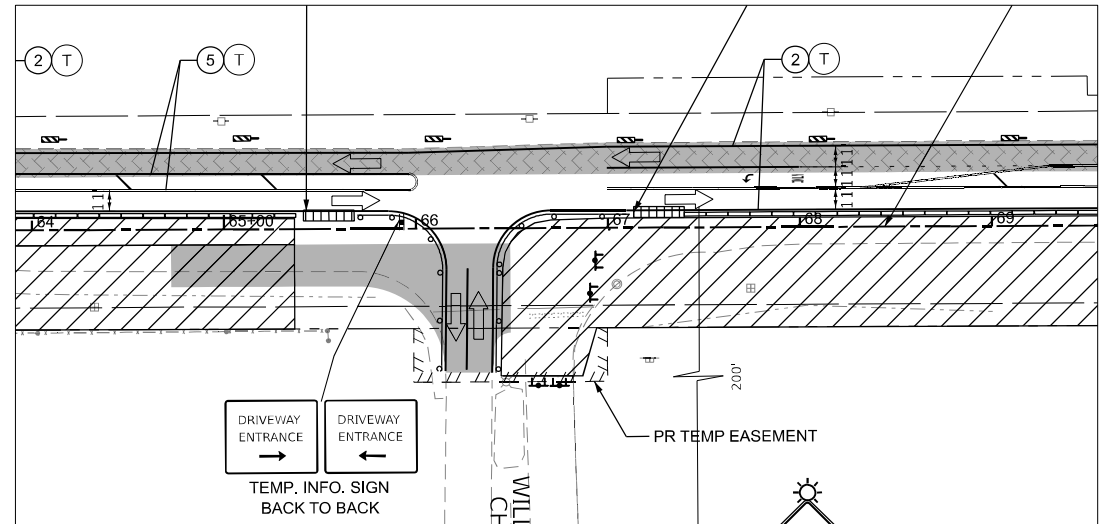

BARRINGTON RD
WILLOW CREEK CHURCH DR
STAGE 1- SUBSTAGE AA

LEGEND

- COMPLETED PAVEMENT
- WORK AREA
- TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
- TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)

MODEL: D:\inf\it...
 FILE NAME: ...
 PROJECT: ...
 SHEET: 71




USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED -
DRAWN - ML	REVISIONS -	
PLOT SCALE = 99.996' / in.	CHECKED - MM	REVISIONS -
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISIONS -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC	
BARRINGTON RD - INTERSECTION STAGING DETAILS	
SCALE: NTS	SHEET 71 OF 73 SHEETS STA. TO STA.


F.A.P. RIE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	154
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

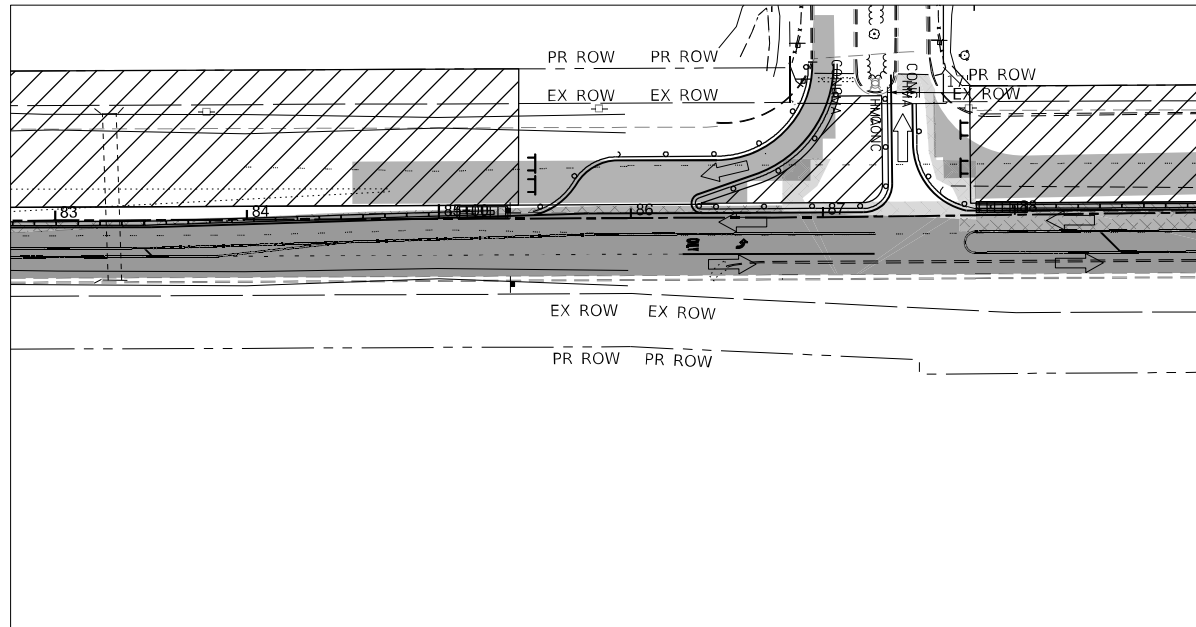

BARRINGTON RD
FALCON LAKES DR
STAGE 2A

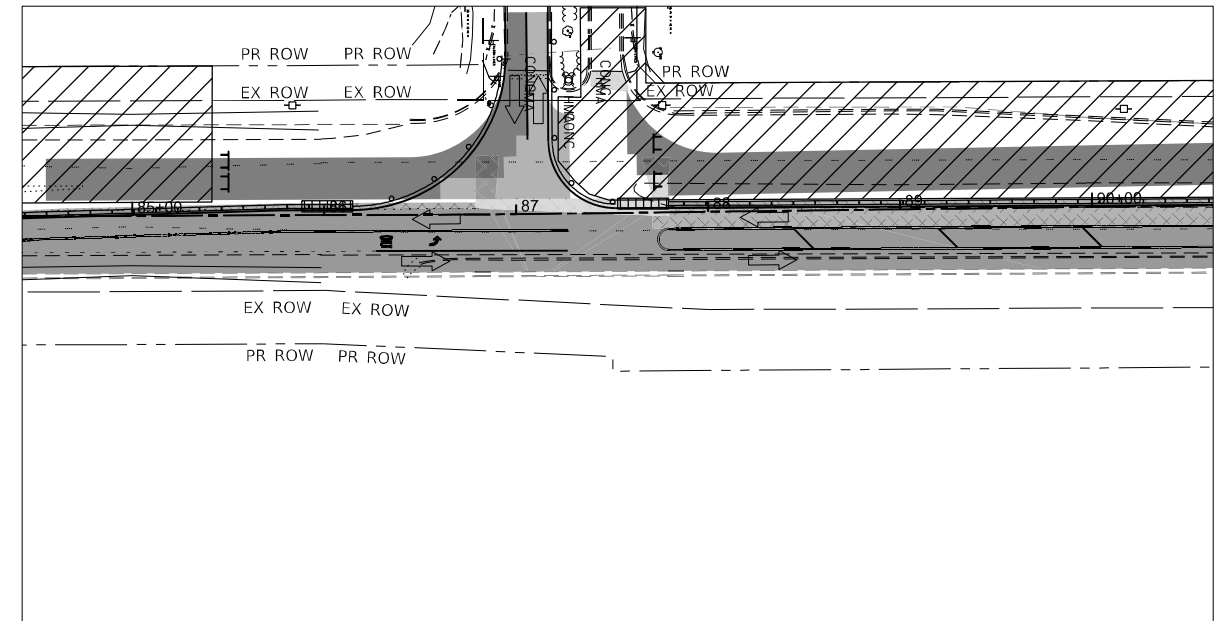



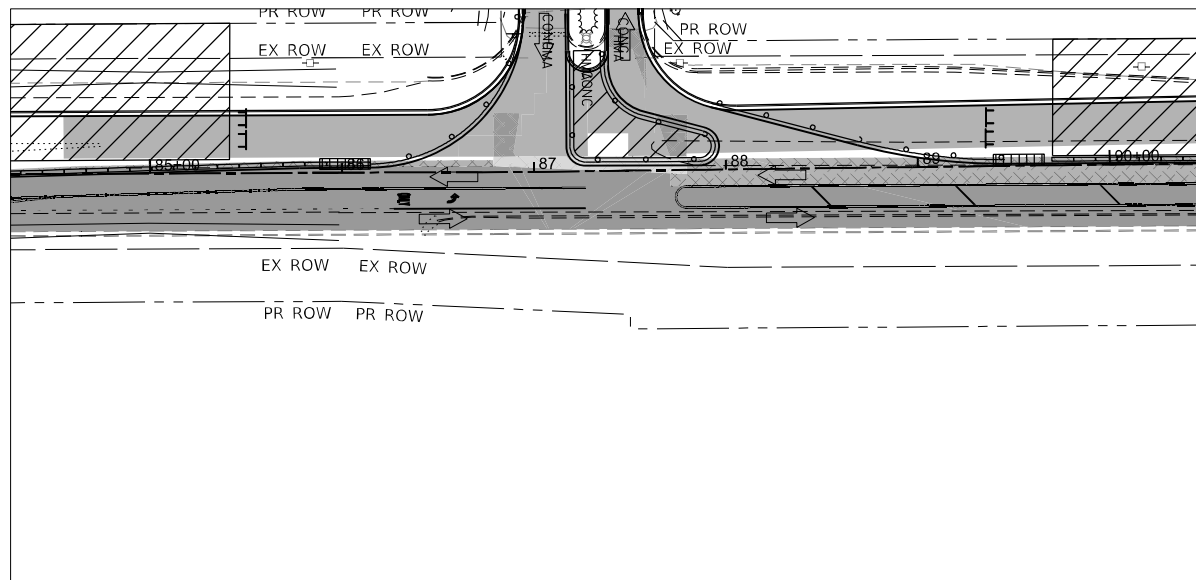

BARRINGTON RD
FALCON LAKES DR
STAGE 2B



BARRINGTON RD
FALCON LAKES DR
STAGE 2C

LEGEND

-  COMPLETED PAVEMENT
-  WORK AREA
-  TEMPORARY PAVEMENT (CONSTRUCTED IN THIS STAGE)
-  TEMPORARY PAVEMENT (PREVIOUSLY CONSTRUCTED)

MODEL: D:\mif...
 FILE NAME: ...
 PROJECT: ...




USER NAME = AmulyaPusluri	DESIGNED - AP	REVISED -
PLOT SCALE = 99.996' / in.	DRAWN - ML	REVISED -
PLOT DATE = 1/20/2026	CHECKED - MM	REVISED -
	DATE - 01/21/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC BARRINGTON RD - INTERSECTION STAGING DETAILS			
SCALE: NTS	SHEET 72	OF 73 SHEETS	STA. TO STA.

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 155
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

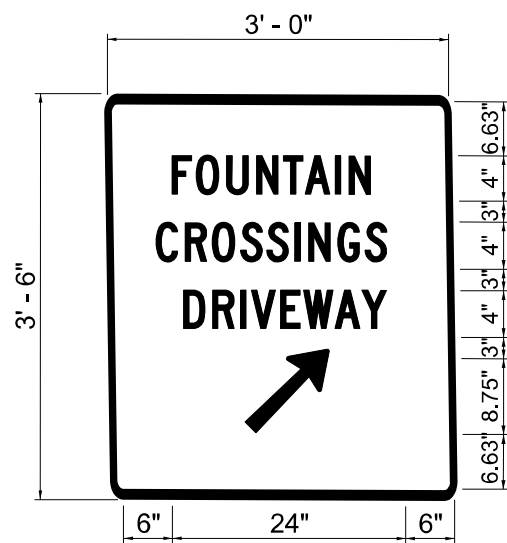

3.0" RADIUS, 0.5" BORDER. WHITE ON GREEN, REFLECTORIZED "DRIVEWAY" D;
 "ENTRANCE" D; STANDARD ARROW CUSTOM 12.0" X 5.0"

NOTES

1. SIGNS TO BE PAID FOR AS ITEM "TEMPORARY INFORMATION SIGNING".

MODEL: D:\info...
 FILE NAME: ...
 PROJECT: ...



USER NAME = AmulyaPusuluri	DESIGNED - AP	REVISED - _____
	DRAWN - ML	REVISED - _____
PLOT SCALE = 99.996' / in.	CHECKED - MM	REVISED - _____
PLOT DATE = 1/20/2026	DATE - 01/21/2026	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC BARRINGTON RD - TEMPORARY INFORMATION SIGN DETAILS	
SCALE: NTS	SHEET 34 OF 73 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	156
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

EROSION & SEDIMENT CONTROL NOTES

1. ALL TEMPORARY EROSION CONTROL MEASURES SHALL BE PROVIDED TO PROTECT ROADWAY, ADJACENT PROPERTIES, AND WATER COURSES AS PER SECTION 280 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, LATEST EDITION.
2. THE CONTRACTOR WILL ASSUME RESPONSIBILITY FOR THE MAINTENANCE OF ALL SOIL EROSION CONTROL DURING CONSTRUCTION.
3. THE CONTRACTOR SHALL CHECK ALL ESC MEASURES WEEKLY AND AFTER EACH RAINFALL, 0.5 INCHES OR GREATER IN A 24 HOUR PERIOD, OR EQUIVALENT SNOWFALL. ADDITIONALLY, ALL MEASURES SHOULD BE CHECKED BY THE CONTRACTOR AFTER EACH SIGNIFICANT SNOWMELT.
4. THE CONTRACTOR SHOULD PROVIDE THE RESIDENT ENGINEER WITH A PLAN THAT SHOWS THAT A STABILIZED FLOW LINE WILL BE PROVIDED DURING STORM SEWER CONSTRUCTION. THE USE OF A STABILIZED FLOW LINE BETWEEN INSTALLED STORM SEWER AND OPEN DISTURBANCE WILL REDUCE THE POTENTIAL FOR THE OFF SITE DISCHARGE OF SEDIMENT-BEARING WATERS, ESPECIALLY WHEN RAIN IS FORECASTED, SO THAT FLOW WILL NOT ERODE. LACK OF APPROVED PLAN OR FAILURE TO COMPLY WILL RESULT IN AN ESC DEFICIENCY DEDUCTION. THIS WORK WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED AS INCLUDED IN THE STORM SEWER PAY ITEMS.
5. ANY LOOSE MATERIAL DEPOSITED IN THE FLOW LINE OF DRAINAGE STRUCTURES, WHICH OBSTRUCTS THE NATURAL FLOW OF WATER, SHALL BE REMOVED AT THE CLOSE OF EACH WORKING DAY. PRIOR TO ACCEPTANCE OF THE IMPROVEMENT, ALL DRAINAGE STRUCTURES SHALL BE FREE OF DIRT AND DEBRIS. THIS WORK WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED AS INCIDENTAL.
6. TEMPORARY OR PERMANENT STABILIZATION SHALL BE INITIATED IMMEDIATELY UPON COMPLETION OF DISTURBANCE OR IF THE WORK AREA IS TO BE LEFT UNDISTURBED FOR 14 DAYS OR MORE.
7. UNDER NO CIRCUMSTANCES SHALL THE CONTRACTOR PROLONG FINAL GRADING AND SHAPING SO THAT THE ENTIRE PROJECT CAN BE PERMANENTLY SEEDED AT ONE TIME.
8. THE CONTRACTOR SHALL ERECT A TEMPORARY FENCE AROUND ALL TREES WITHIN THE CONSTRUCTION AREA TO ESTABLISH A "TREE PROTECTION ZONE" AND AROUND EXISTING WETLANDS TO ESTABLISH A "WETLAND PROTECTION ZONE" BEFORE ANY WORK BEGINS OR ANY MATERIAL IS DELIVERED TO THE JOBSITE. NO WORK IS TO BE PERFORMED (OTHER THAN ROOT PRUNING), MATERIALS STORED, OR VEHICLES DRIVEN OR PARKED WITHIN THE "TREE PROTECTION ZONE" AND "WETLAND PROTECTION ZONE". REMOVE PROTECTIVE TEMPORARY FENCE ONLY AFTER ALL CONSTRUCTION WORK HAS BEEN COMPLETED.
9. THE CONTRACTOR SHALL ATTACH AN ALUMINUM SIGN WITH THE FOLLOWING TEXT: PROTECTED WETLAND - NO INTRUSION. THE SIGN(S) SHALL BE ATTACHED TO THE STAKES BY A METHOD APPROVED BY THE RESIDENT ENGINEER. THE SIGN(S) WILL BE PROVIDED BY THE DEPARTMENT AND SHALL BE PICKED UP BY THE CONTRACTOR FROM THE DISTRICT ONE ROADSIDE DEVELOPMENT ARCHITECT IN SCHAUMBURG, ILLINOIS. SCHEDULING THE PICKUP OF THE SIGNS CAN BE ARRANGED BY CONTACTING THE DISTRICT ONE ROADSIDE DEVELOPMENT UNIT AT (847) 705-4171. WHEN WORK HAS BEEN COMPLETED, THE SIGN SHALL BE RETURNED TO THE DISTRICT ONE ROADSIDE DEVELOPMENT UNIT. THE COST OF PICKING UP, ATTACHING THE SIGNS TO THE TEMPORARY FENCE STAKES, AND RETURNING THE SIGNS WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR TEMPORARY FENCE.
10. "WETLANDS EXCLUSION FENCING" AND "WETLANDS NO INTRUSION" SIGNAGE SHOULD ALSO BE PROVIDED AT THE BOUNDARY OF ALL UN-IMPACTED WETLANDS AND/OR WOUS. INCLUDE TEMPORARY FENCING AND WETLAND SIGNAGE WITHIN THE EROSION AND SEDIMENT CONTROL STRATEGY.
11. IF WETLANDS ARE UNDER WATER, PERIMETER EROSION BARRIER MAY BE INSUFFICIENT FOR PROMOTING WATER QUALITY. THE CONTRACTOR WILL BE RESPONSIBLE FOR DETERMINING A SUITABLE ALTERNATIVE FOR PROMOTING WATER QUALITY AND THIS WORK SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
12. EROSION CONTROL ITEMS ARE CONSIDERED TO BE A HIGH PRIORITY ON THIS CONTRACT. THE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ANY ADDITIONAL EROSION CONTROL MEASURES NECESSARY TO PREVENT EROSION AND SEDIMENTATION AS DETERMINED BY THE RESIDENT ENGINEER.
13. ALL ESC MEASURES WILL BE MAINTAINED IN ACCORDANCE WITH THE IDOT EROSION AND SEDIMENT CONTROL FIELD GUIDE FOR CONSTRUCTION INSPECTION FOUND ON THE CONSTRUCTION TAB AT:
(<https://idot.illinois.gov/content/dam/soi/en/web/idot/documents/transportation-system/manualsguides-and-handbooks/highways/environment/erosion-and-sediment-control-field-guide-for-construction-inspection.pdf>).
14. MULCH, METHOD 2 SHOULD BE APPLIED TO SLOPES FOR TEMPORARY STABILIZATION PRIOR TO SEASONS WHEN TEMPORARY SEED WILL NOT GERMINATE, FOR EXAMPLE IN MID-JULY OR IN WINTER.

404 PERMIT NOTE

THIS PROJECT REQUIRES A US ARMY CORPS OF ENGINEERS (USACE) 404 PERMIT THAT WILL BE SECURED BY THE DEPARTMENT. ALL CONDITIONS OF THE 404 PERMIT, FOUND IN THE SPECIAL PROVISIONS, MUST BE FOLLOWED. AS A CONDITION OF THIS PERMIT, THE CONTRACTOR WILL NEED TO SUBMIT AN IN-STREAM WORK PLAN (INCLUDING WORK WITHIN WETLANDS) TO THE DEPARTMENT FOR APPROVAL. GUIDELINES ON ACCEPTABLE IN-STREAM WORK TECHNIQUES (INCLUDING WORK WITHIN WETLANDS) CAN BE FOUND ON THE USACE WEBSITE. THE USACE DEFINES AND DETERMINES IN-STREAM WORK. THE COST OF ALL MATERIALS AND LABOR NECESSARY TO COMPLY WITH THE ABOVE PROVISIONS TO PREPARE AND IMPLEMENT AN IN-STREAM WORK PLAN (INCLUDING WORK WITHIN WETLANDS) WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE CONSIDERED AS INCLUDED IN THE UNIT BID PRICES OF THE CONTRACT AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED WITH THE EXCEPTION OF COFFERDAMS, WHICH WILL BE PAID FOR AS COFFERDAM (TYPE 1) (IN-STREAM/WETLAND WORK) AND COFFERDAM (TYPE 2) (IN-STREAM/WETLAND WORK) WITH A BASIS OF PAYMENT OF EACH.

MODEL: Sheet 1
 FILE NAME: p:\in\pwin\01-bea\trans\escr\pwin\Documents\Projects_2020\CH401\01012001B\CAD02 - Sheets\09-Temp Dim and Esc CH401\ESC Notes.dgn



USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.166666' / in.	DRAWN - RBW	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL NOTES


SCALE: SHEET 1 OF 16 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	157
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

MODEL: Plan 1 (Sheet)
 FILE NAME: \\p01p01\point01_s-a-trans\scorp.com\trans\scorp\w1\Documents\Projects_2020\CAD\4014012001018\CAD\02_Sheet\09-Temp Dm and Eros Control\02-Erosion Control Pre-Stage 1.dgn

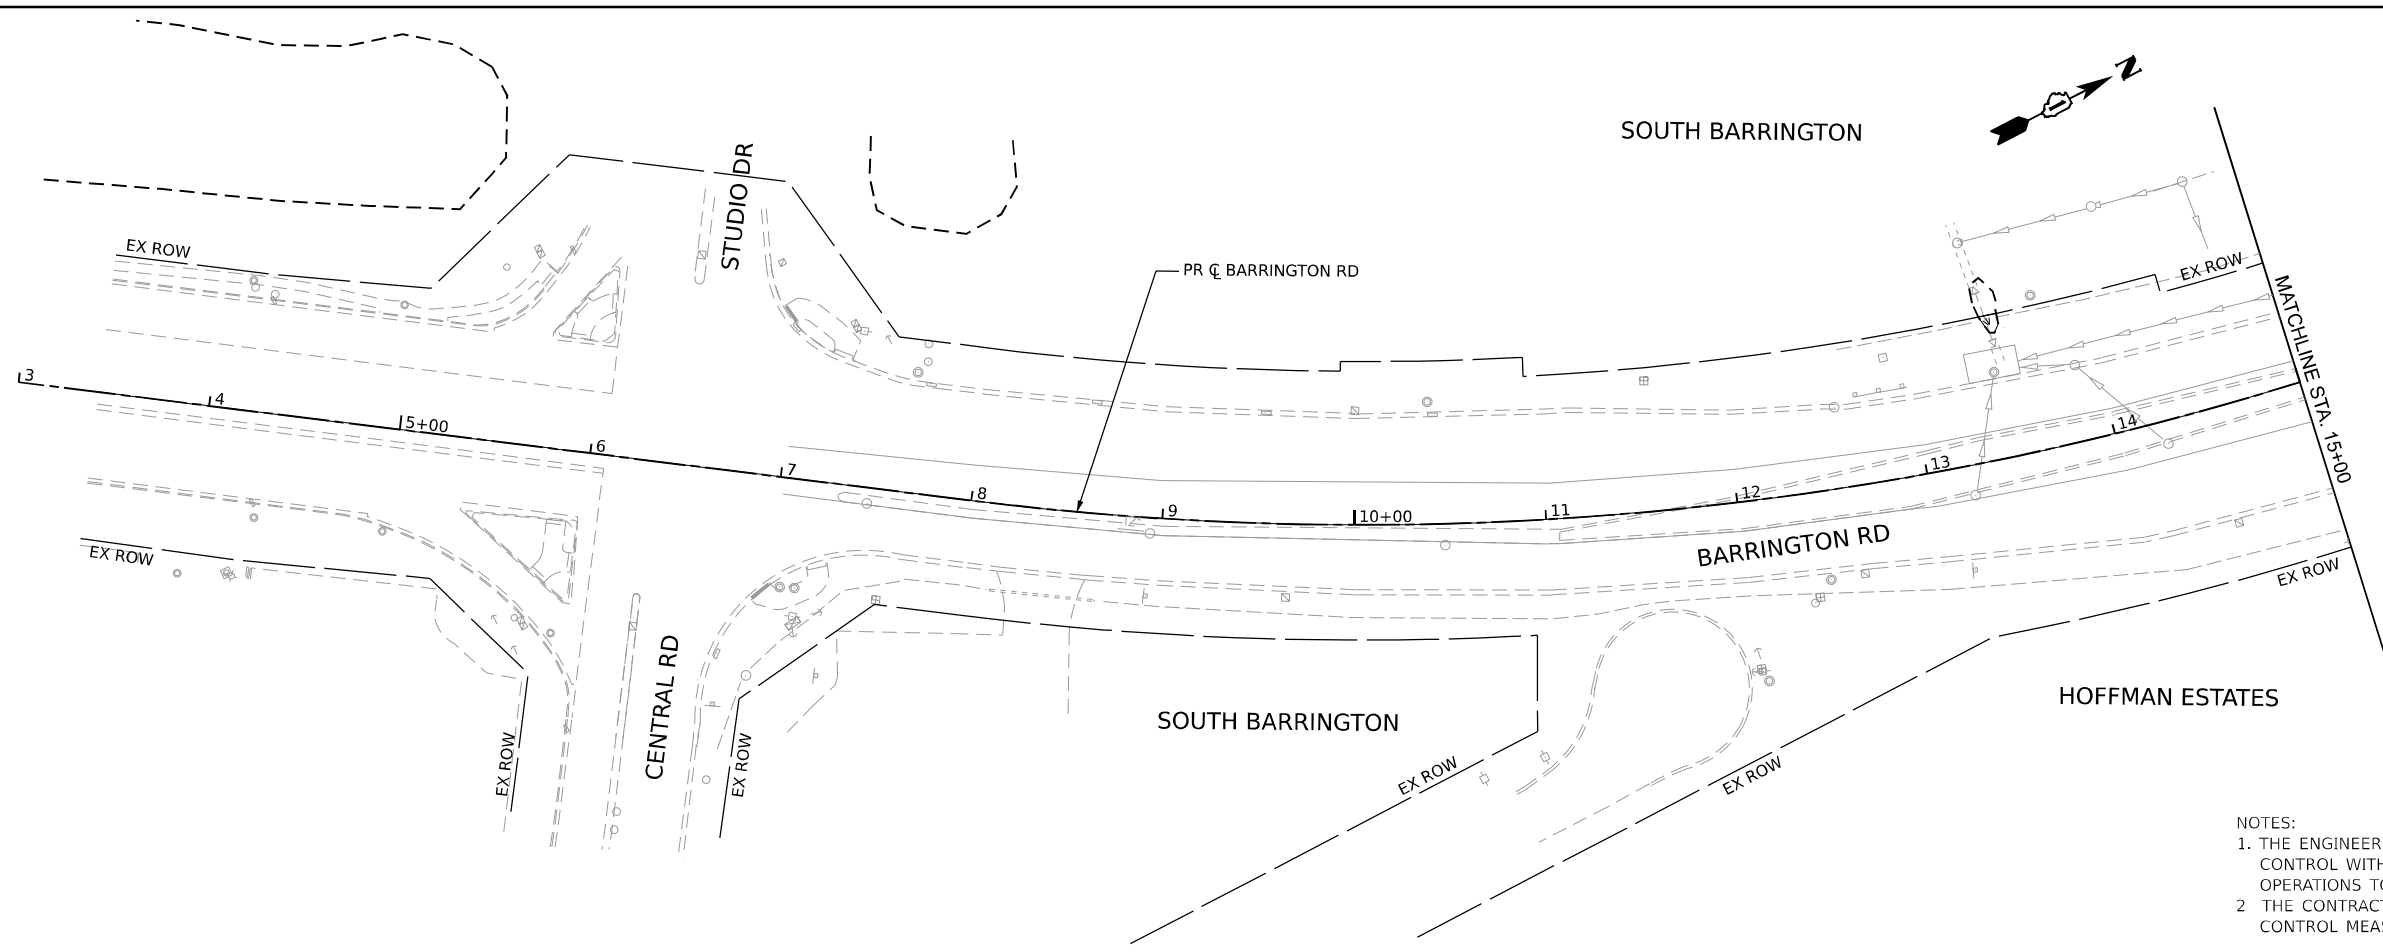

- NOTES:**
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

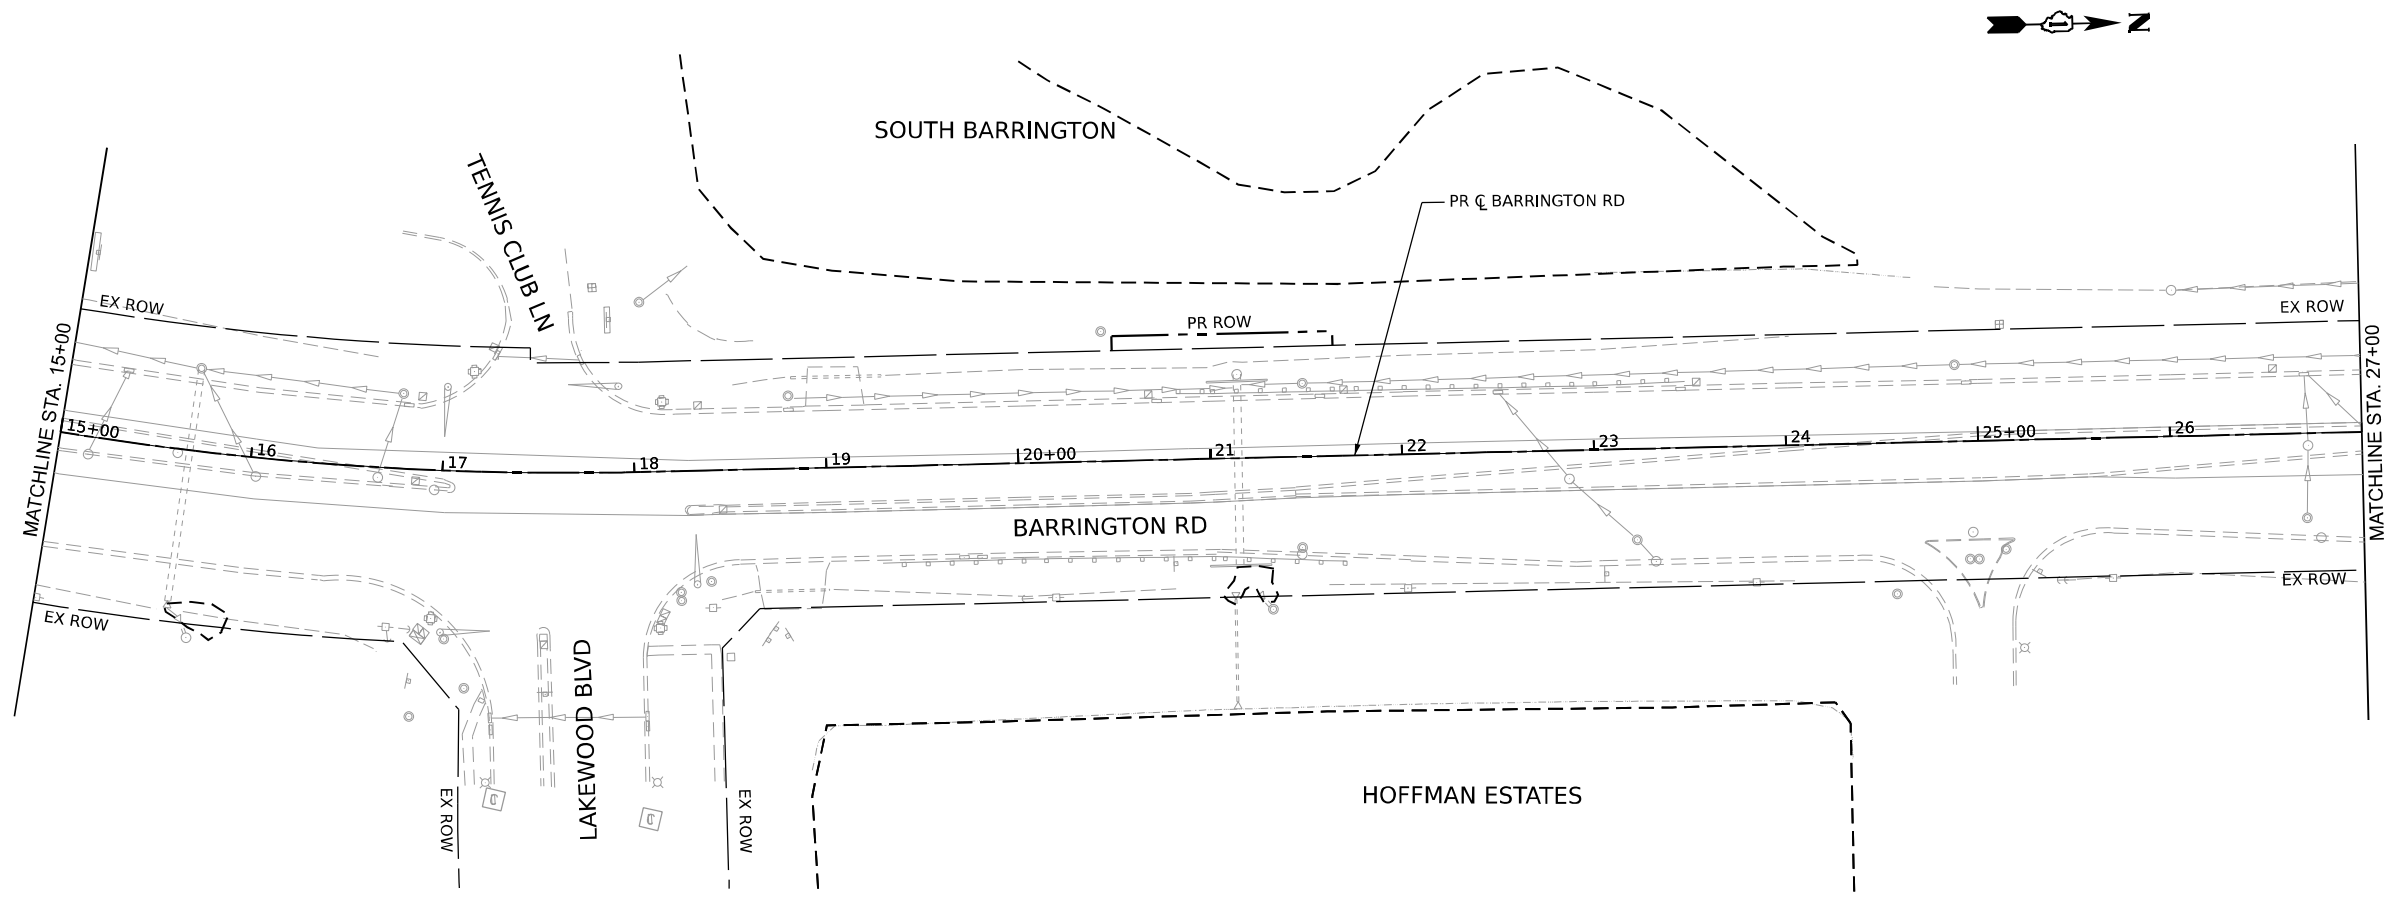

LEGEND

	TEMPORARY EROSION CONTROL SEEDING
	EROSION CONTROL BLANKET
	TEMPORARY DITCH CHECK
	TEMPORARY FENCE
	PERIMETER EROSION BARRIER
	INLET AND PIPE PROTECTION
	INLET FILTER
	WETLAND / W.O.U.S. IMPACTS
	WETLAND / W.O.U.S. BOUNDARY
	RIPRAP





USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/ in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN - PRE STAGE 1			
SCALE: 1:50	SHEET 2	OF 16 SHEETS	STA. 3+00 TO STA. 27+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 158
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

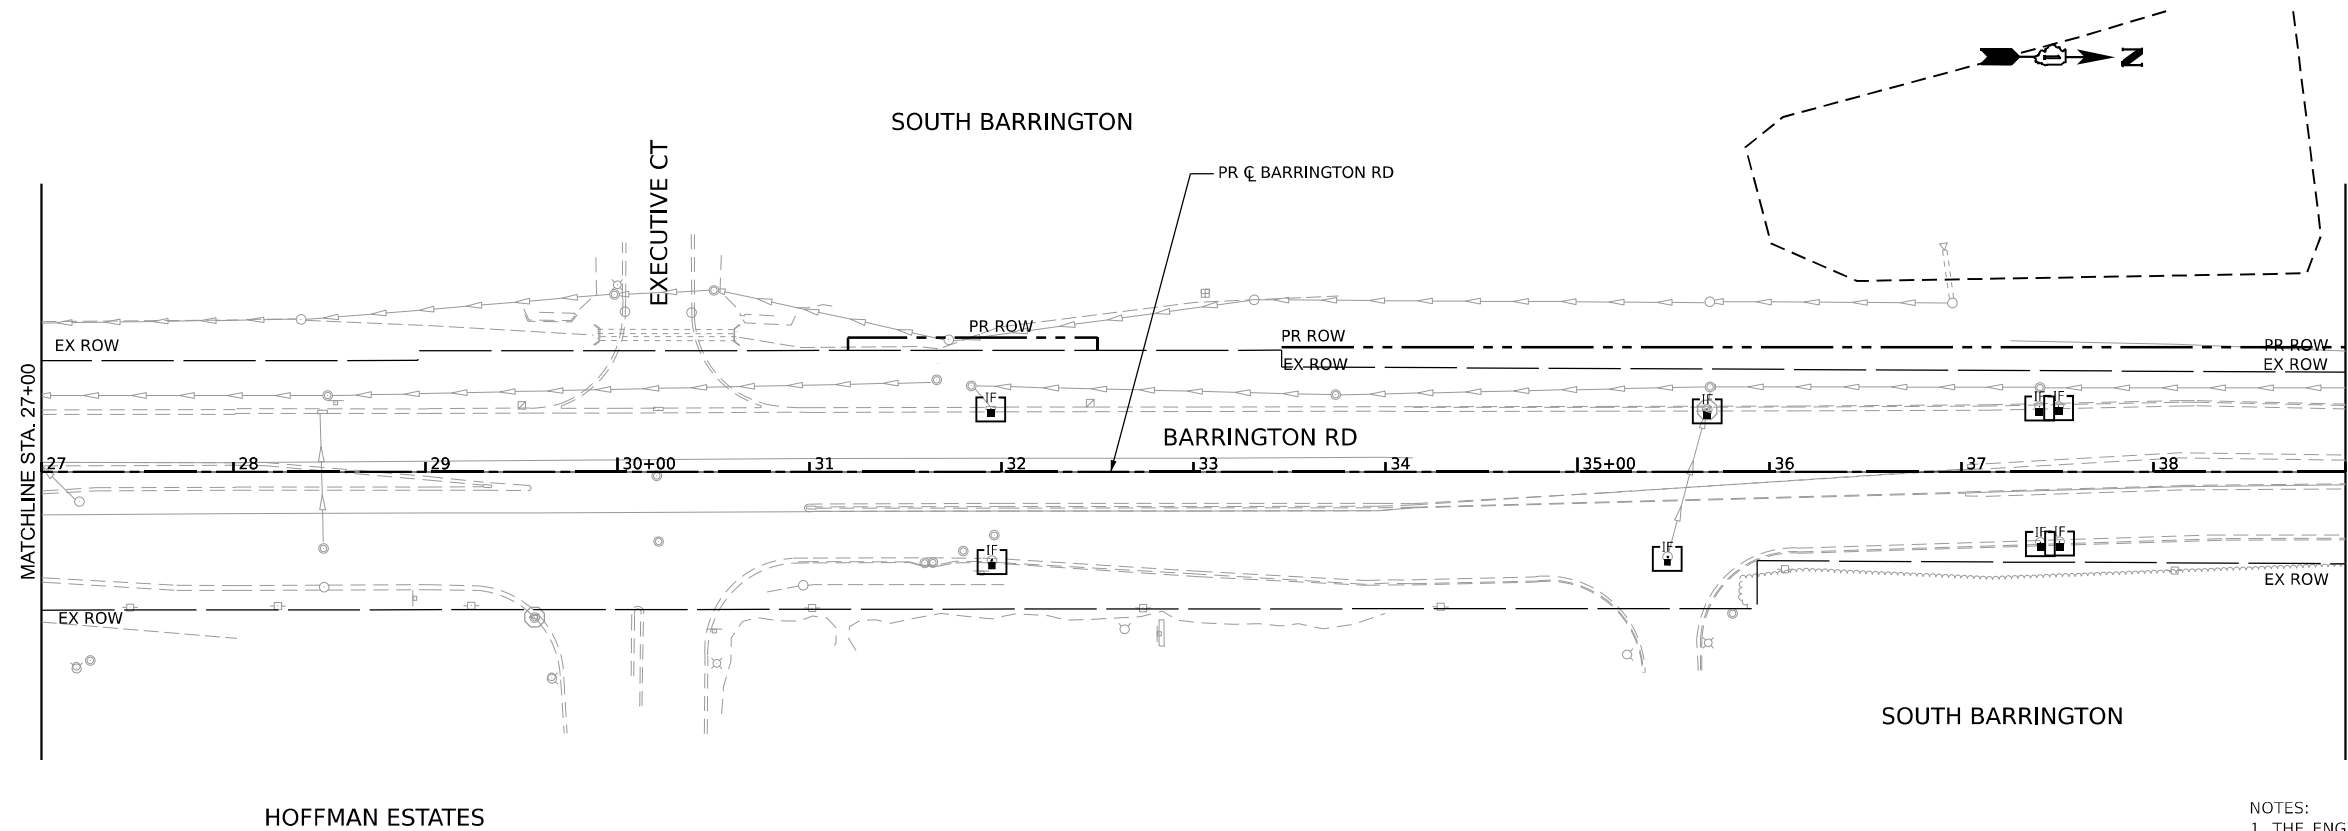

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

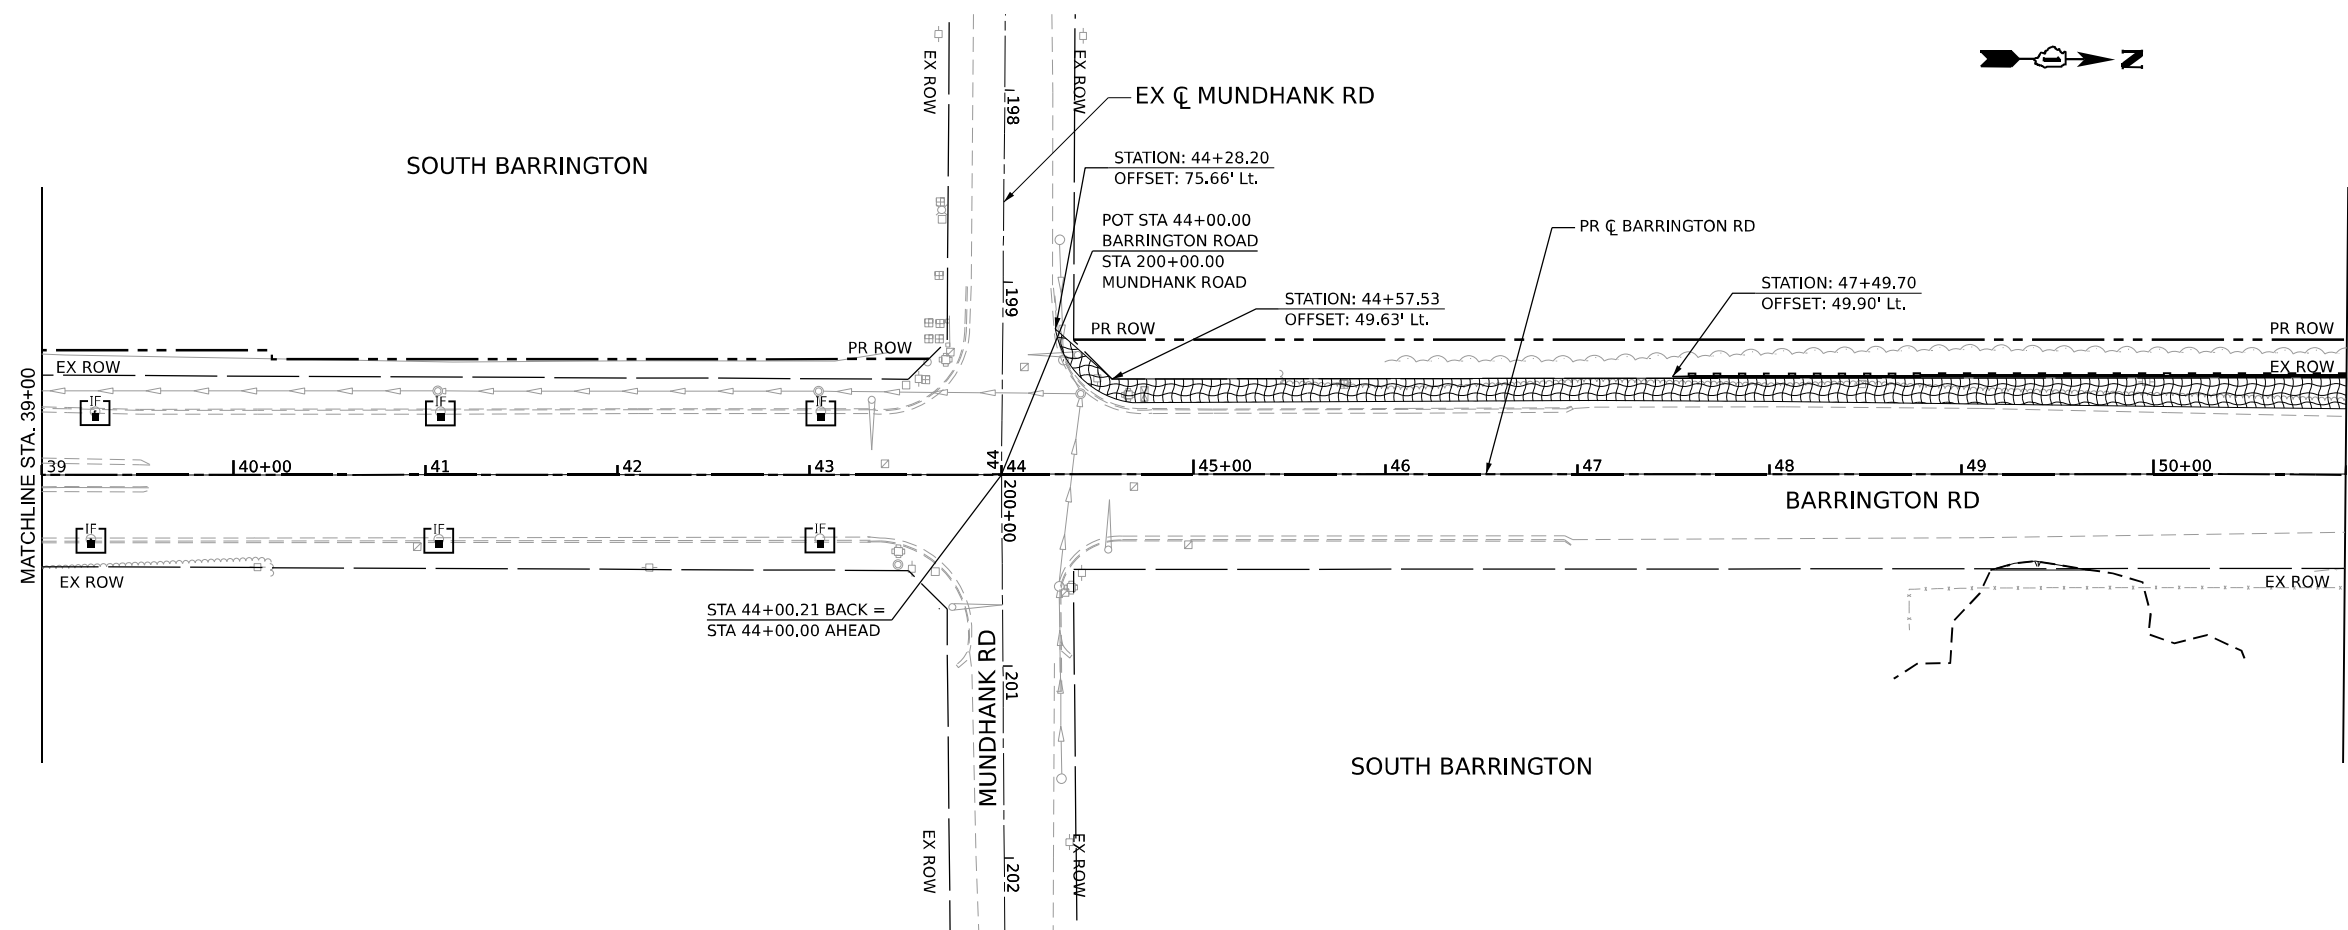

- LEGEND**
- TEMPORARY EROSION CONTROL SEEDING
 - EROSION CONTROL BLANKET
 - TEMPORARY DITCH CHECK
 - TEMPORARY FENCE
 - PERIMETER EROSION BARRIER
 - INLET AND PIPE PROTECTION
 - INLET FILTER
 - WETLAND / W.O.U.S. IMPACTS
 - WETLAND / W.O.U.S. BOUNDARY
 - RIPRAP

MODEL: Plan 3 (Sheet)
 FILE NAME: p:\projects\point01_sae\trans\scorp.com\trans\scorp\p01\Documents\Projects_2020\CH4401\001200018\CAD\02_Sheet\09Temp_Dm and Eros CH4401\0355\F-Erosion Control Pre-Stage 1.dgn




USER NAME = Matthew Toussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/ in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN - PRE STAGE 1			
SCALE: 1:50	SHEET 3	OF 16 SHEETS	STA. 27+00 TO STA. 51+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	159
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

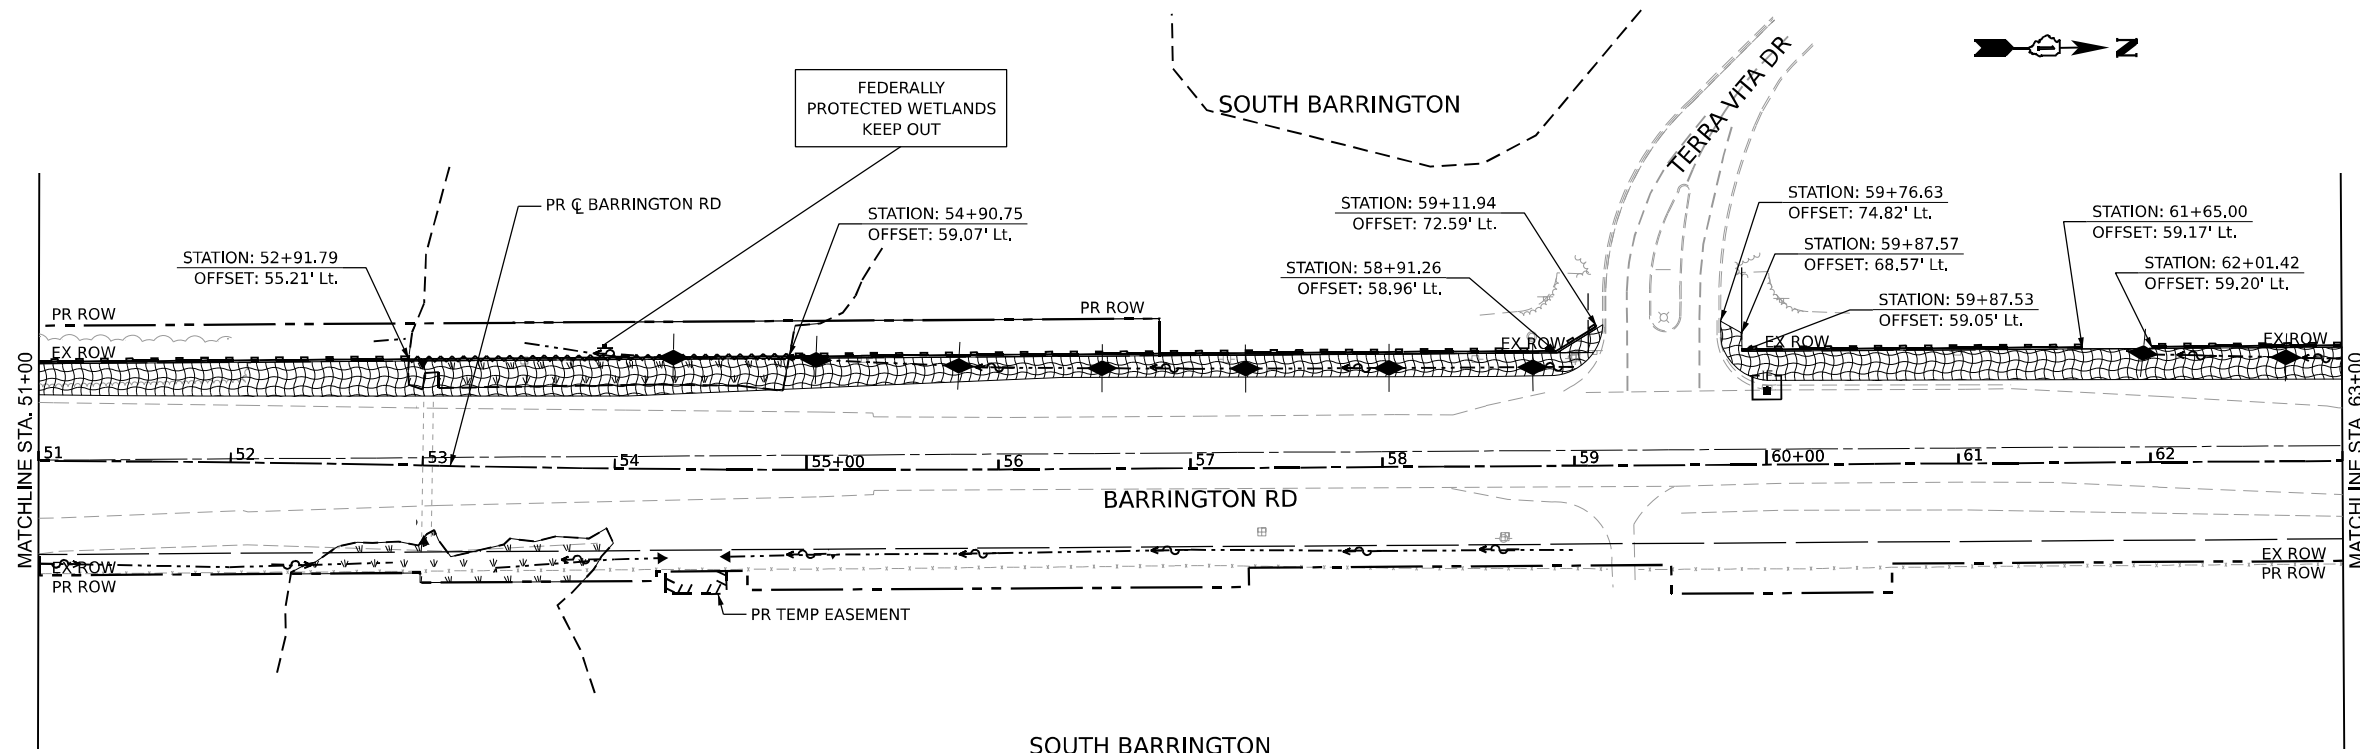

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

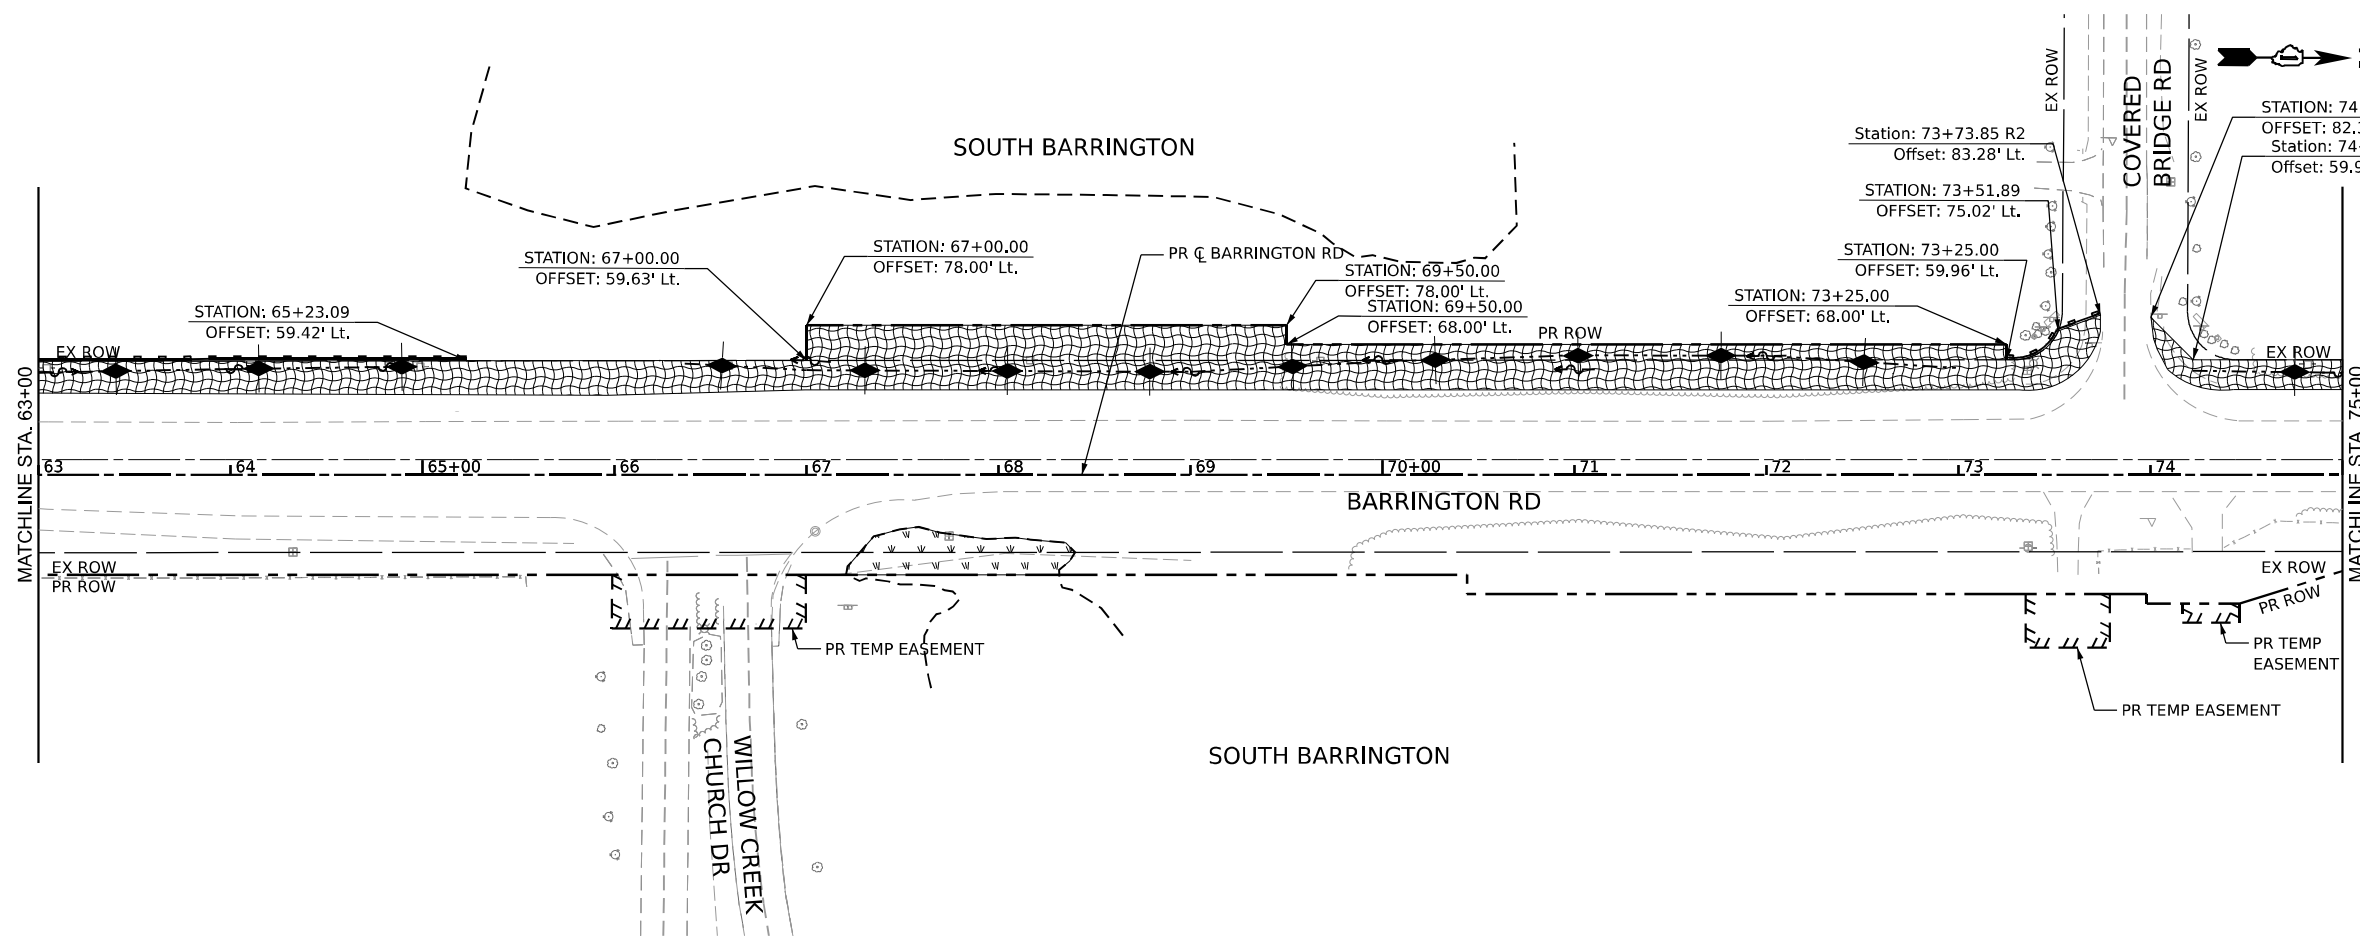

LEGEND

- TEMPORARY EROSION CONTROL SEEDING
- EROSION CONTROL BLANKET
- TEMPORARY DITCH CHECK
- TEMPORARY FENCE
- PERIMETER EROSION BARRIER
- INLET AND PIPE PROTECTION
- INLET FILTER
- WETLAND / W.O.U.S. IMPACTS
- WETLAND / W.O.U.S. BOUNDARY
- RIPRAP

MODEL: Plan 5 (Sheet)
 FILE NAME: p:\projects\2019-161-W\Documents\Projects_2020\CH401\01\20200118\CA0102 - Street\09-Temp Dm and Eros\CH401\ER0355\F-Erosion Control Pre-Stage 1.dgn




USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/1 in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


EROSION AND SEDIMENT CONTROL PLAN - PRE STAGE 1			
SCALE: 1:50	SHEET 4 OF 16 SHEETS	STA. 51+00	TO STA. 75+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	160
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

MODEL: Plan 7 (Sheet)
 FILE NAME: p:\projects\2019-161-W\Documents\Projects_2020\CH401\01\20018\CAD\02 - Sheet\09-Temp Dm and Eros CH401\ER0355\F-Erosion Control Pre-Stage 1.dgn

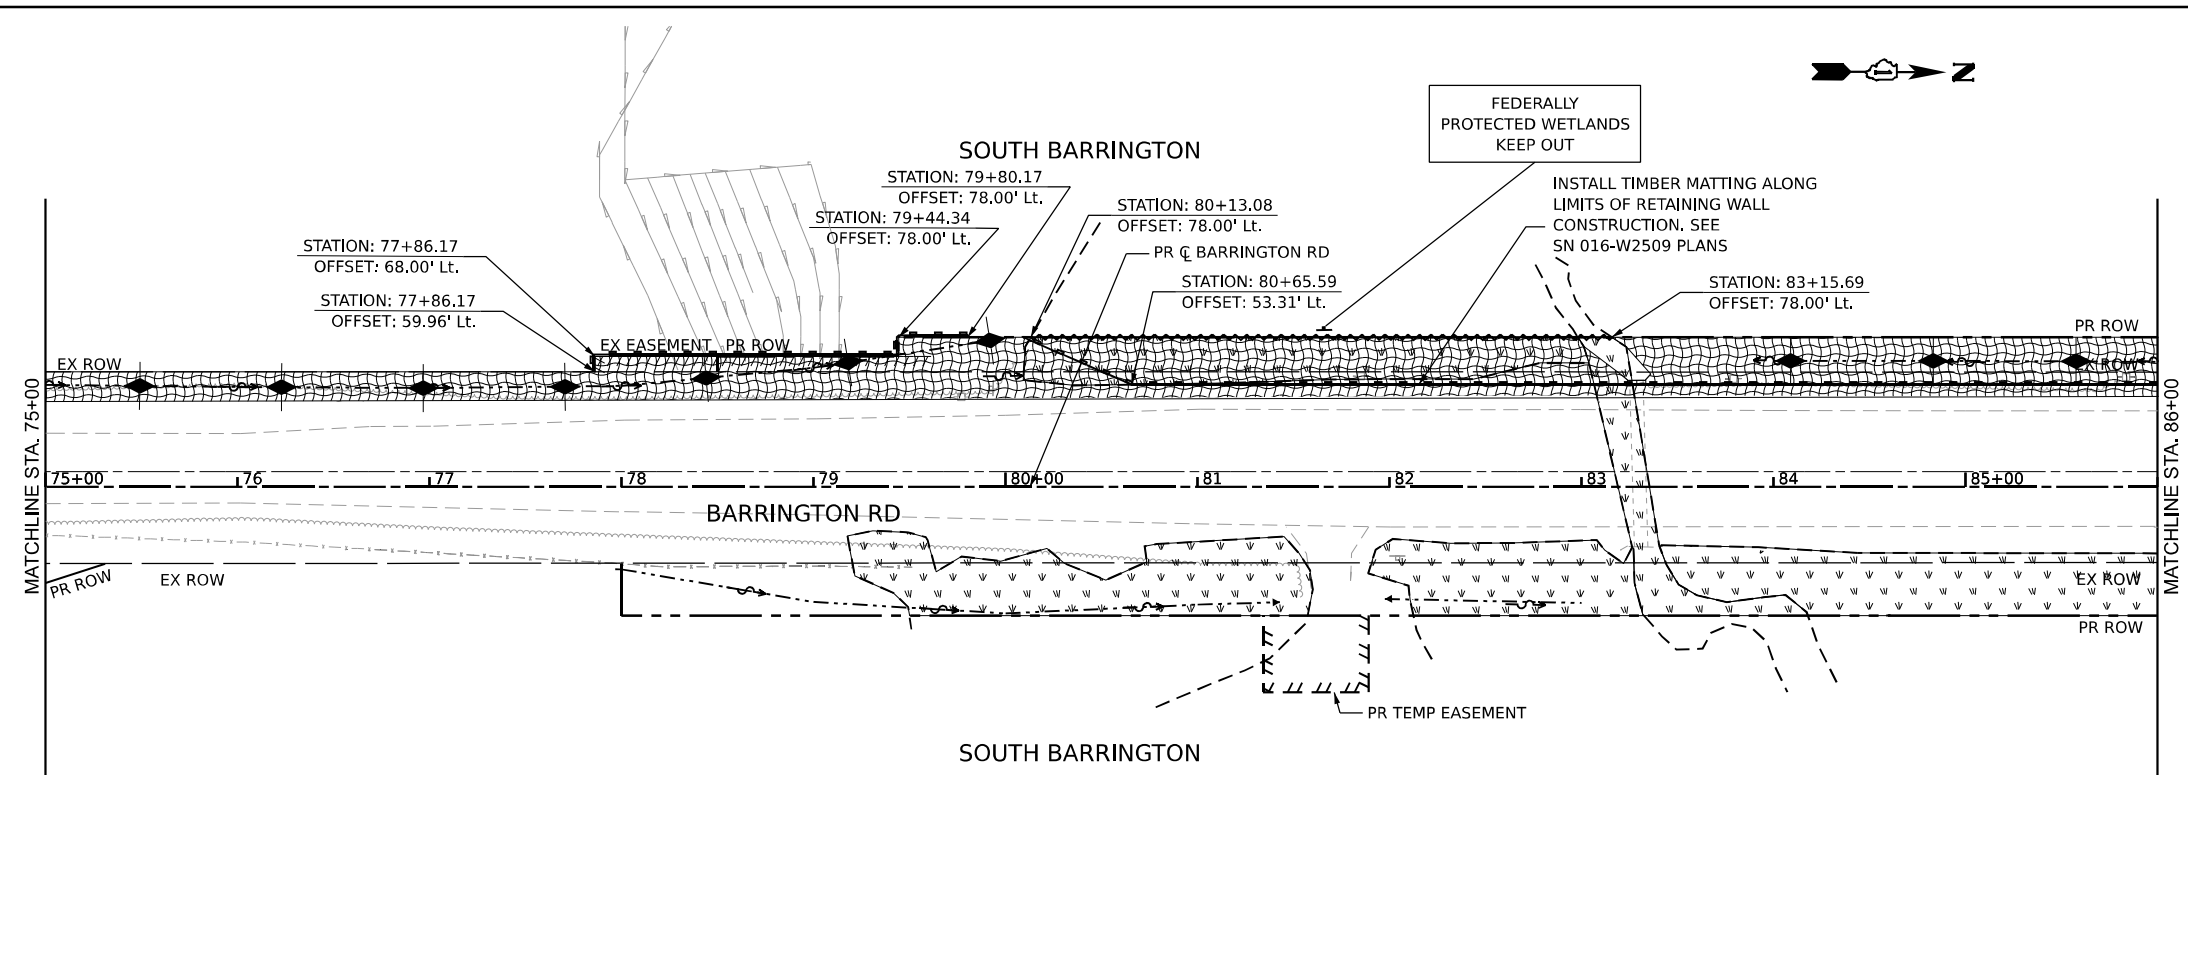

- NOTES:**
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

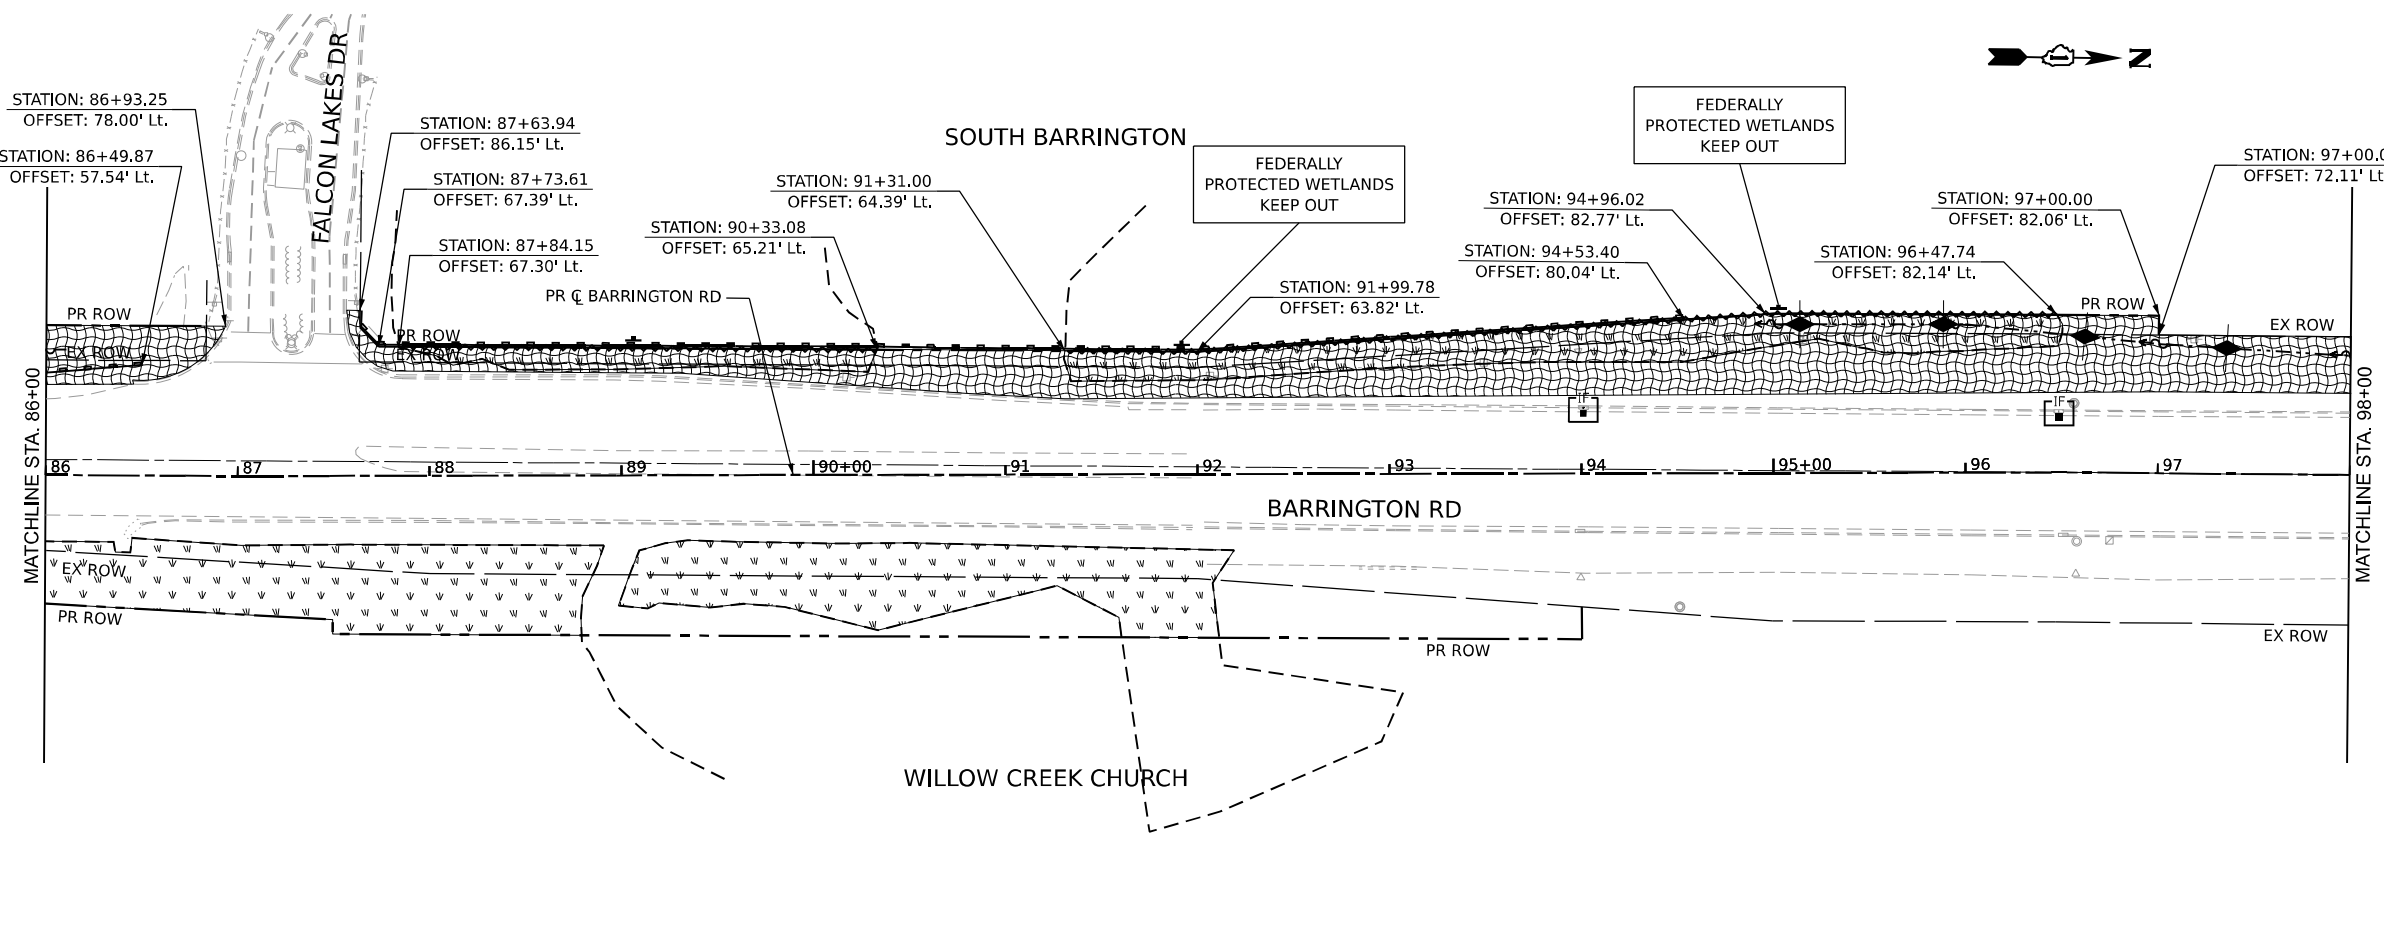

LEGEND

	TEMPORARY EROSION CONTROL SEEDING
	EROSION CONTROL BLANKET
	TEMPORARY DITCH CHECK
	TEMPORARY FENCE
	PERIMETER EROSION BARRIER
	INLET AND PIPE PROTECTION
	INLET FILTER
	WETLAND / W.O.U.S. IMPACTS
	WETLAND / W.O.U.S. BOUNDARY
	RIPRAP





USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/ in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN - PRE STAGE 1
 SCALE: 1:50 SHEET 5 OF 16 SHEETS STA. 75+00 TO STA. 98+00


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	161
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

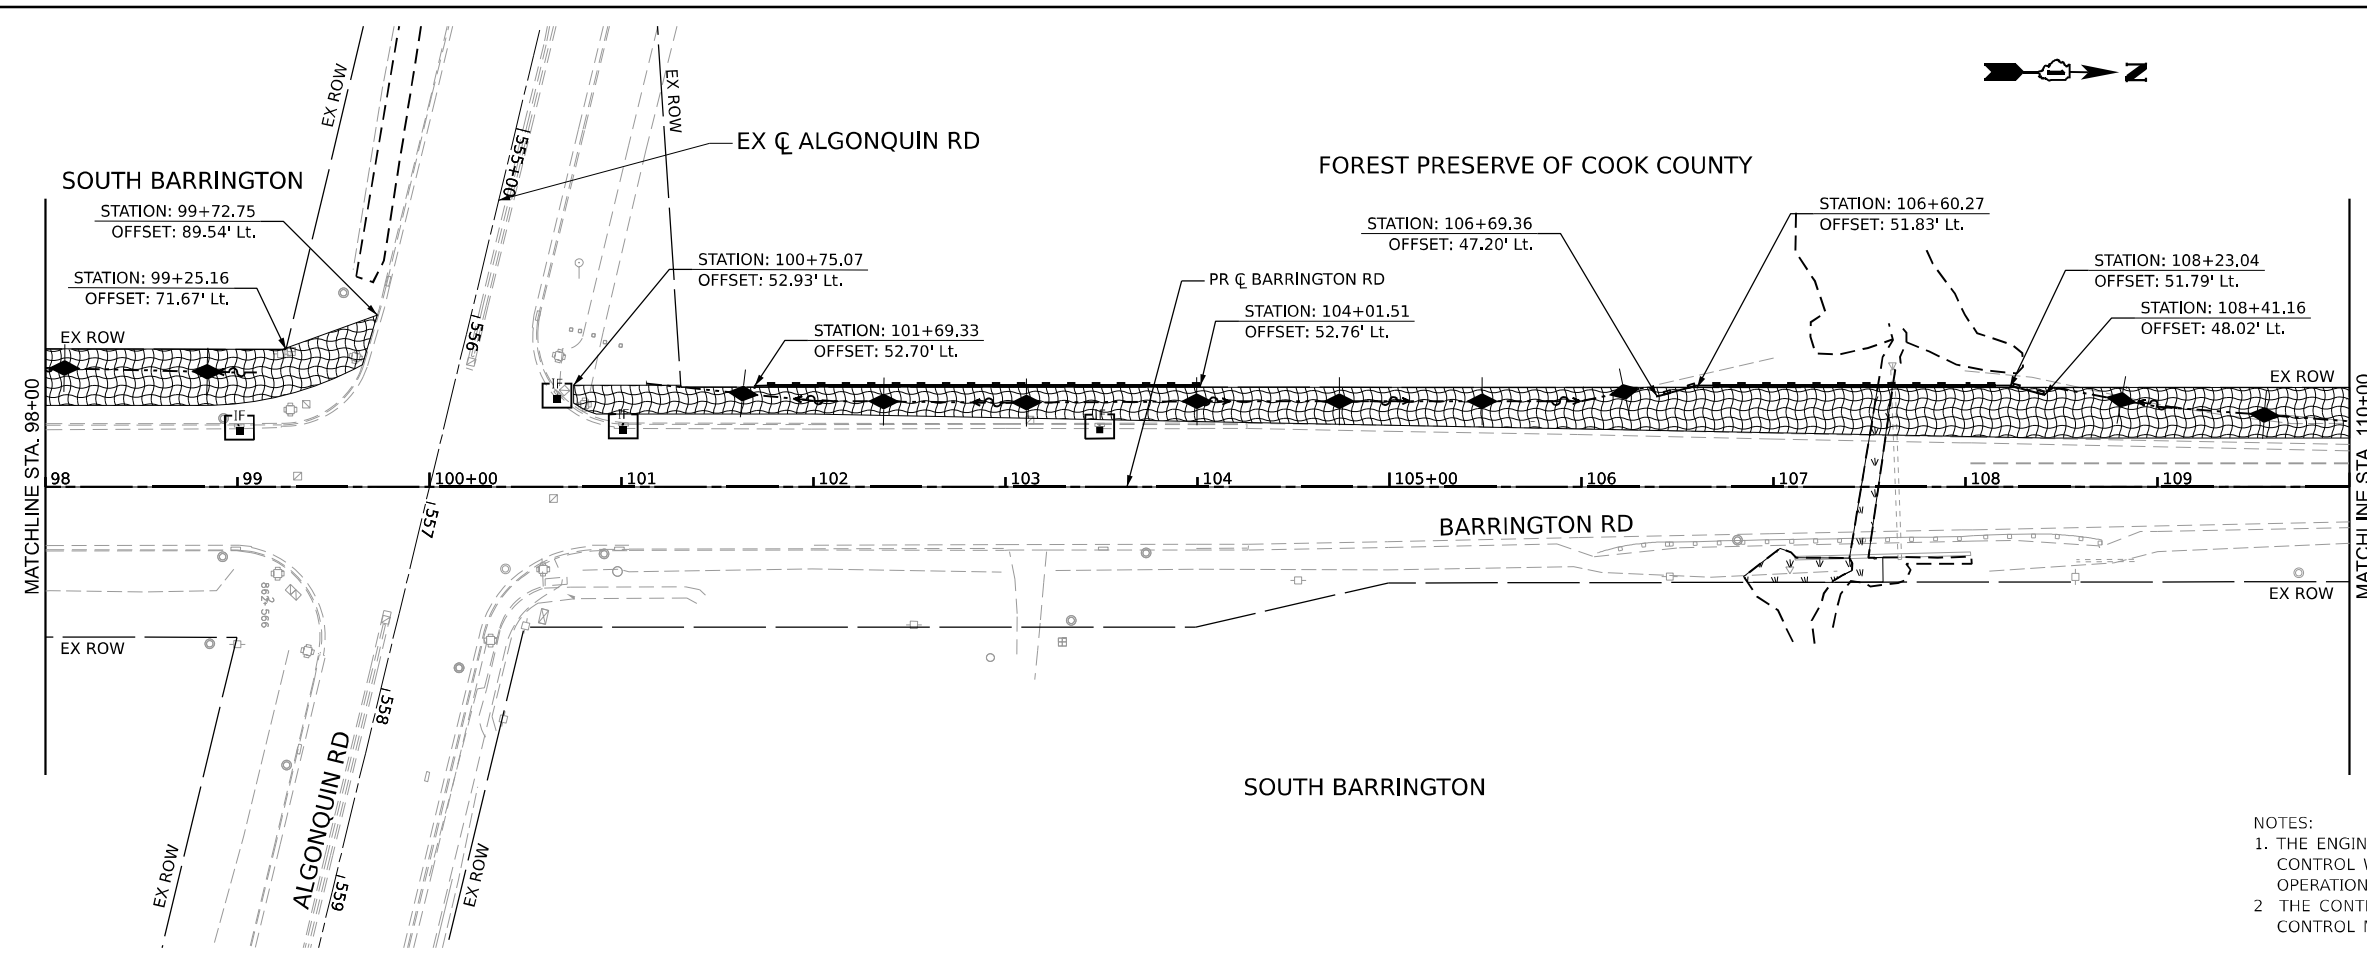

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

LEGEND

	TEMPORARY EROSION CONTROL SEEDING
	EROSION CONTROL BLANKET
	TEMPORARY DITCH CHECK
	TEMPORARY FENCE
	PERIMETER EROSION BARRIER
	INLET AND PIPE PROTECTION
	INLET FILTER
	WETLAND / W.O.U.S. IMPACTS
	WETLAND / W.O.U.S. BOUNDARY
	RIPRAP

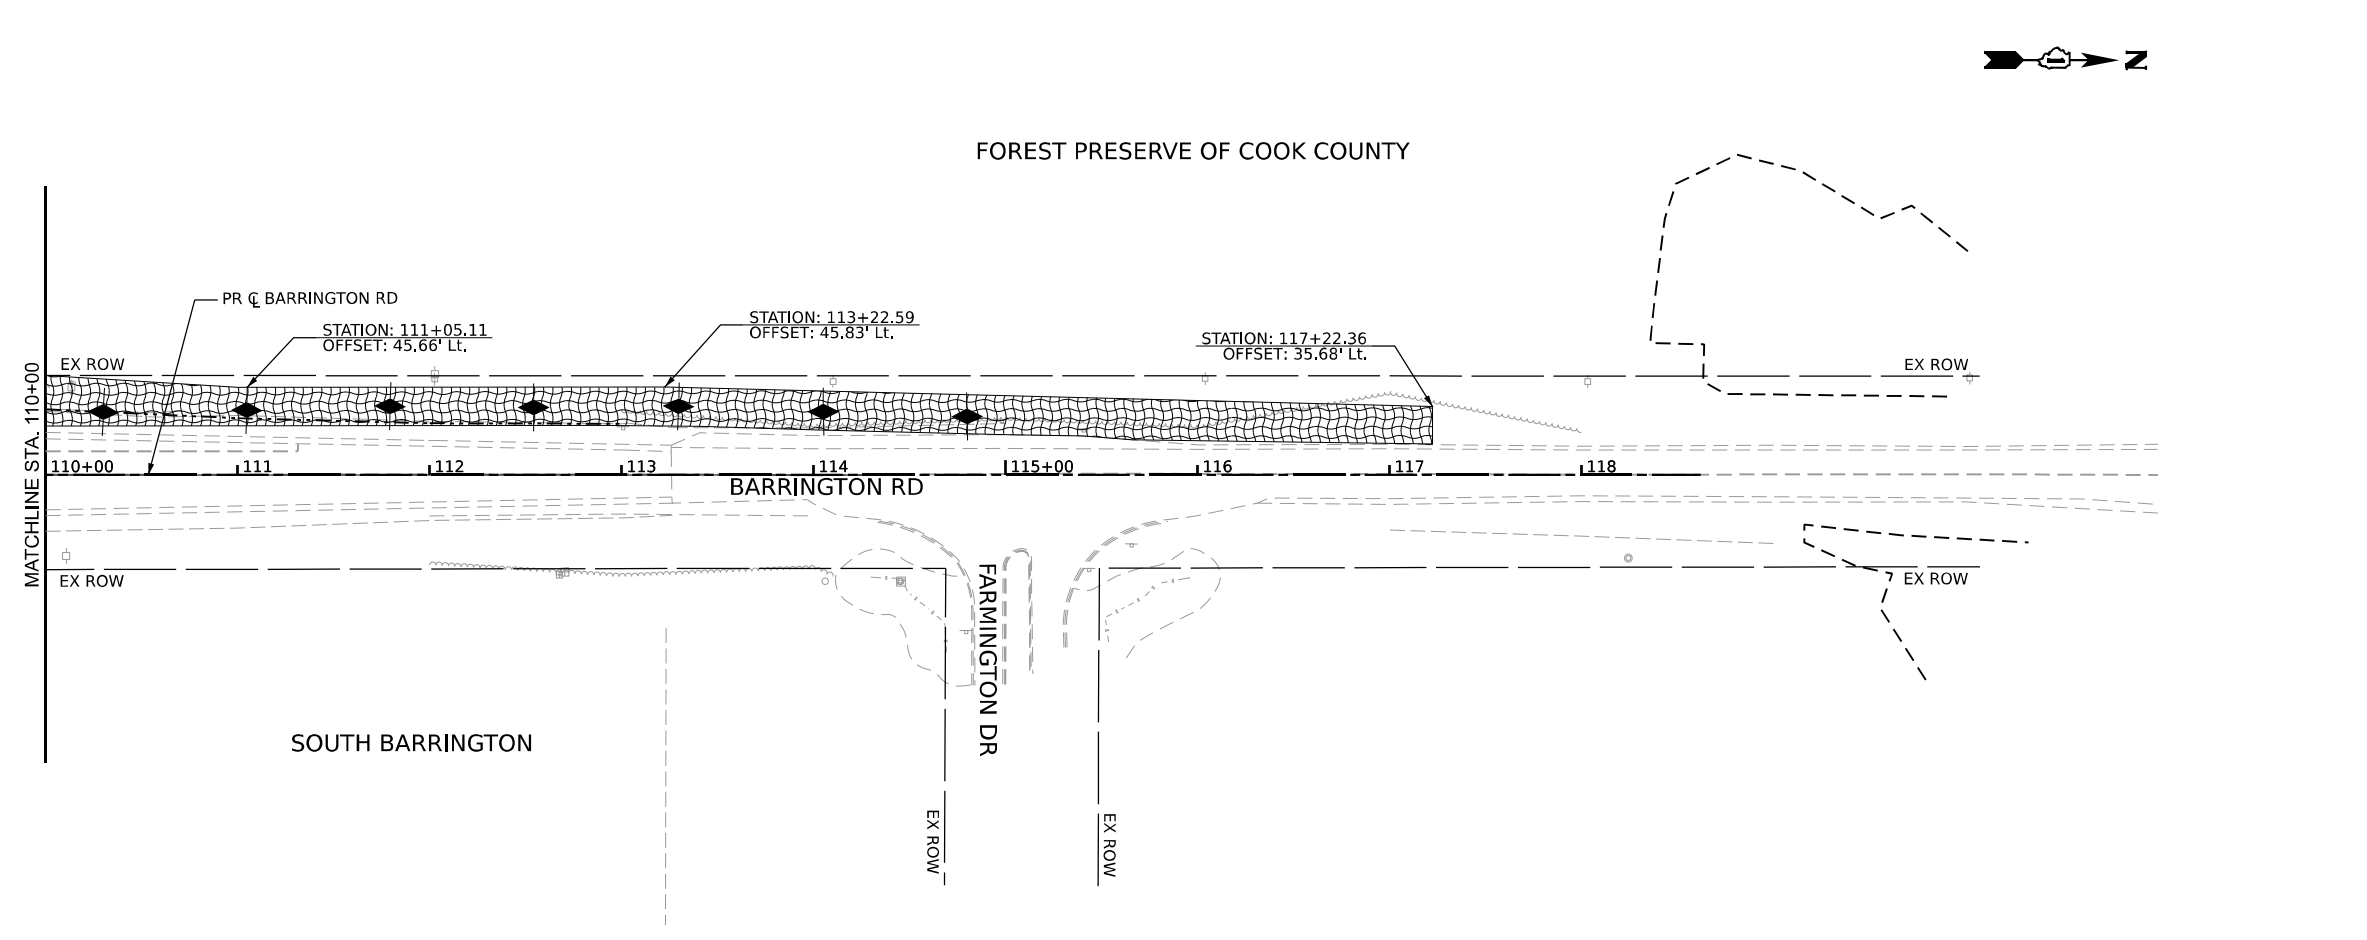

MODEL: Plan 0 (Sheet)
 FILE NAME: p:\projects\point01_sae\trans\scorp.com\trans\scorp\w1\Documents\Projects_2020\CH4401\01\20200118\CAD\02_Sheet\09-Temp Dm and Eros CHD\16263554T-Erosion Control Pre-Stage 1.dgn






USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/ in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


EROSION AND SEDIMENT CONTROL PLAN - PRE STAGE 1
 SCALE: 1:50 SHEET 6 OF 16 SHEETS STA. 98+00 TO STA. 118+61.86

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	162
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				


SOUTH BARRINGTON

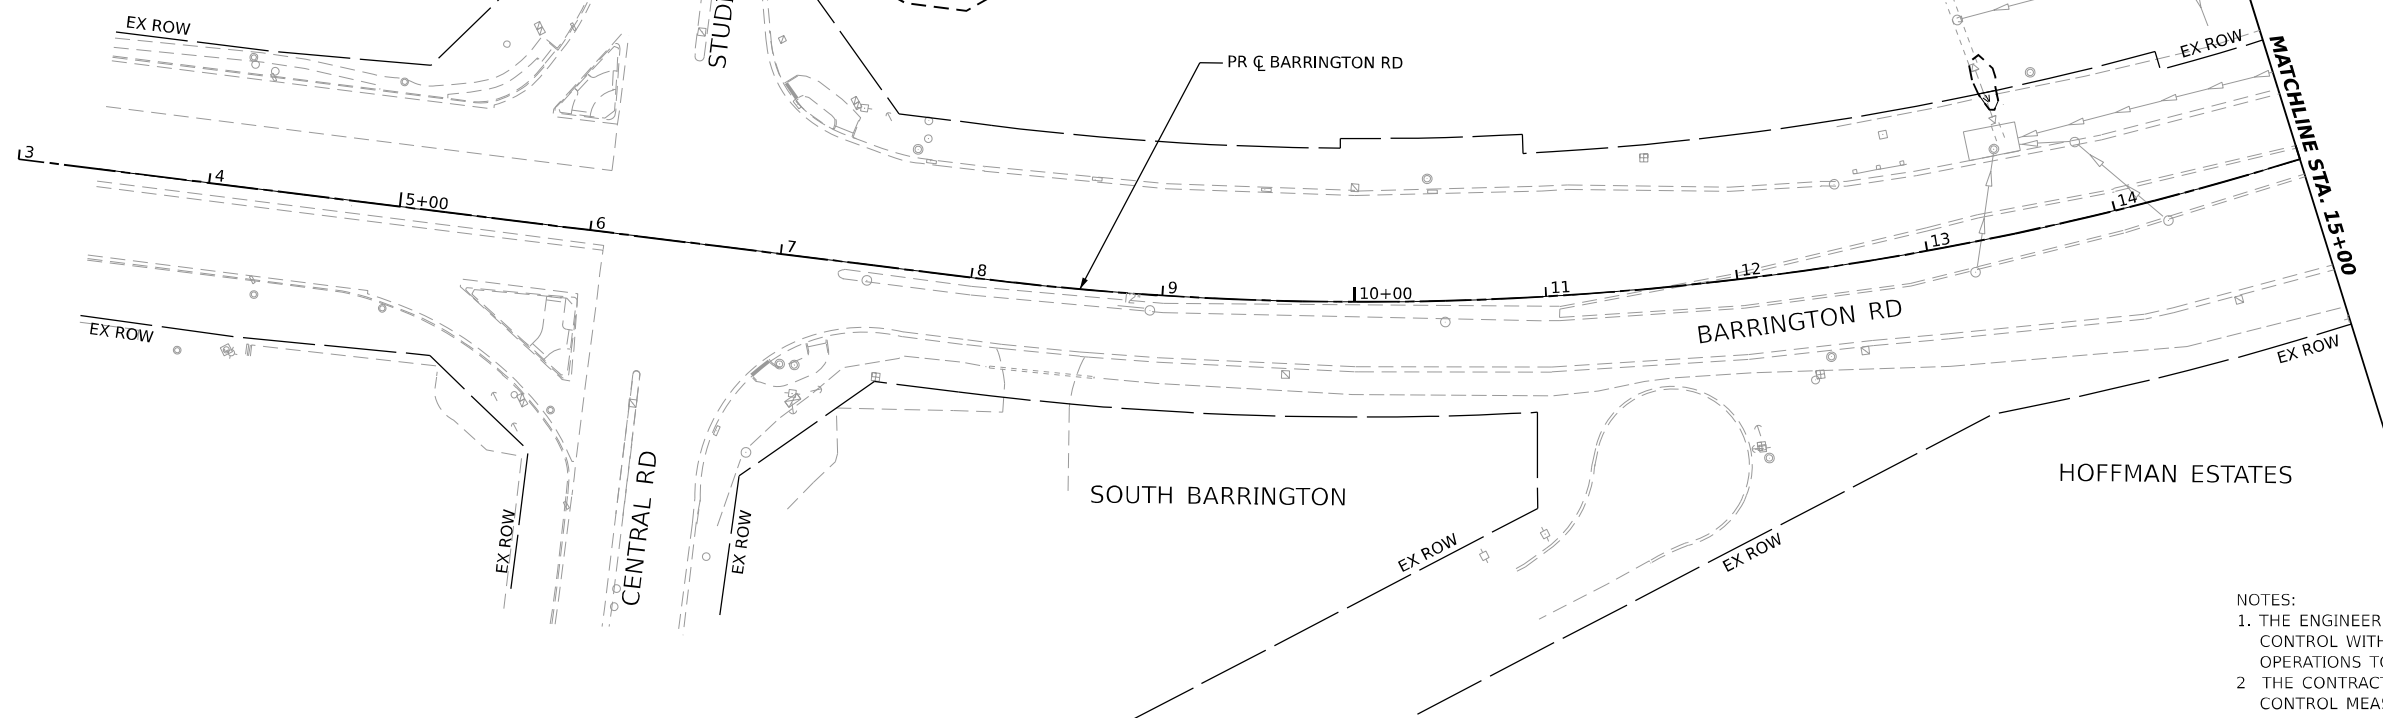

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.



- LEGEND**
- TEMPORARY EROSION CONTROL SEEDING
 - EROSION CONTROL BLANKET
 - TEMPORARY DITCH CHECK
 - TEMPORARY FENCE
 - PERIMETER EROSION BARRIER
 - INLET AND PIPE PROTECTION
 - INLET FILTER
 - WETLAND / W.O.U.S. IMPACTS
 - WETLAND / W.O.U.S. BOUNDARY
 - RIPRAP

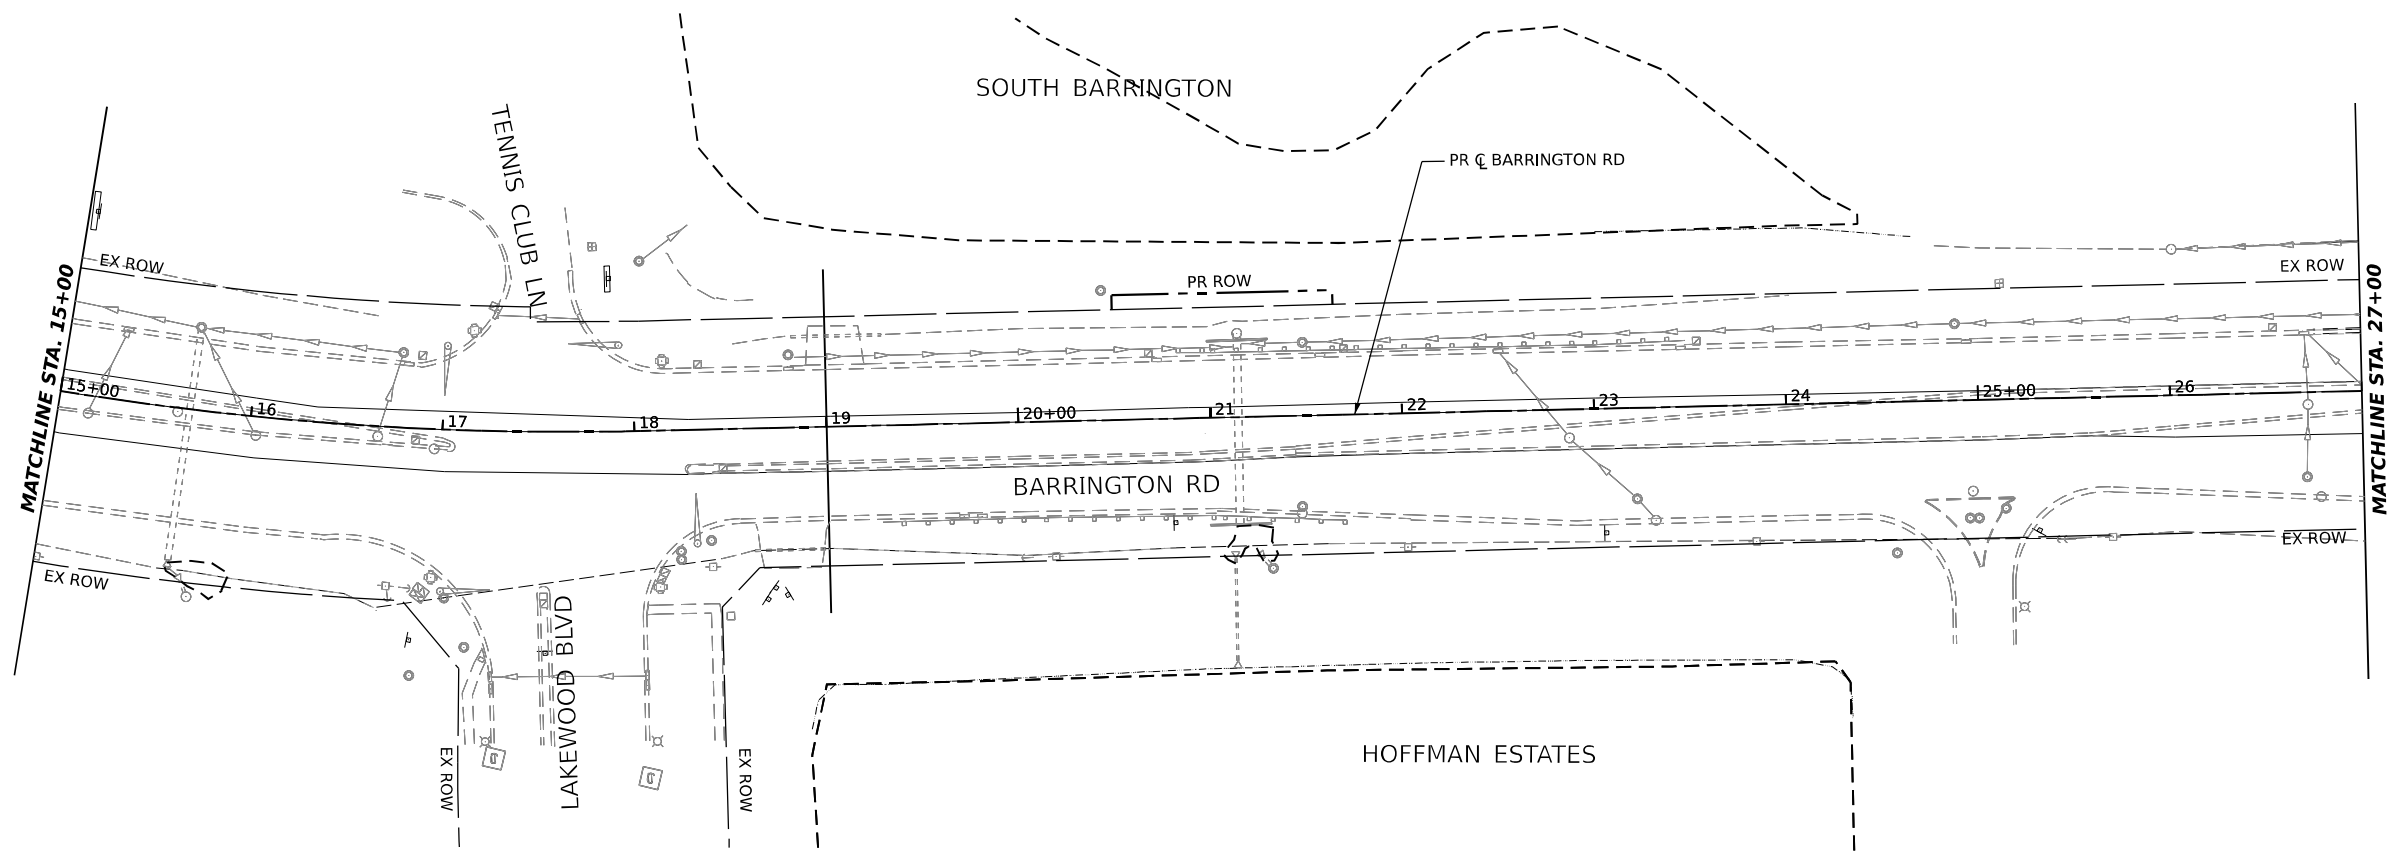

MODEL: Plan 1 (Sheet)
 FILE NAME: \\p1\p1\point01_sae\trans\scorp\trans\scorp\w1\Documents\Projects_2020\C1401\01\200118\CAD\02_Sheet\09-Temp Dm and Eros CND\1626355\Ft-Erosion Control Stage 1.dgn





USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/1 in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN - STAGE 1			
SCALE: 1:50	SHEET 7 OF 16 SHEETS	STA. 3+00 TO STA. 27+00	

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 163
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

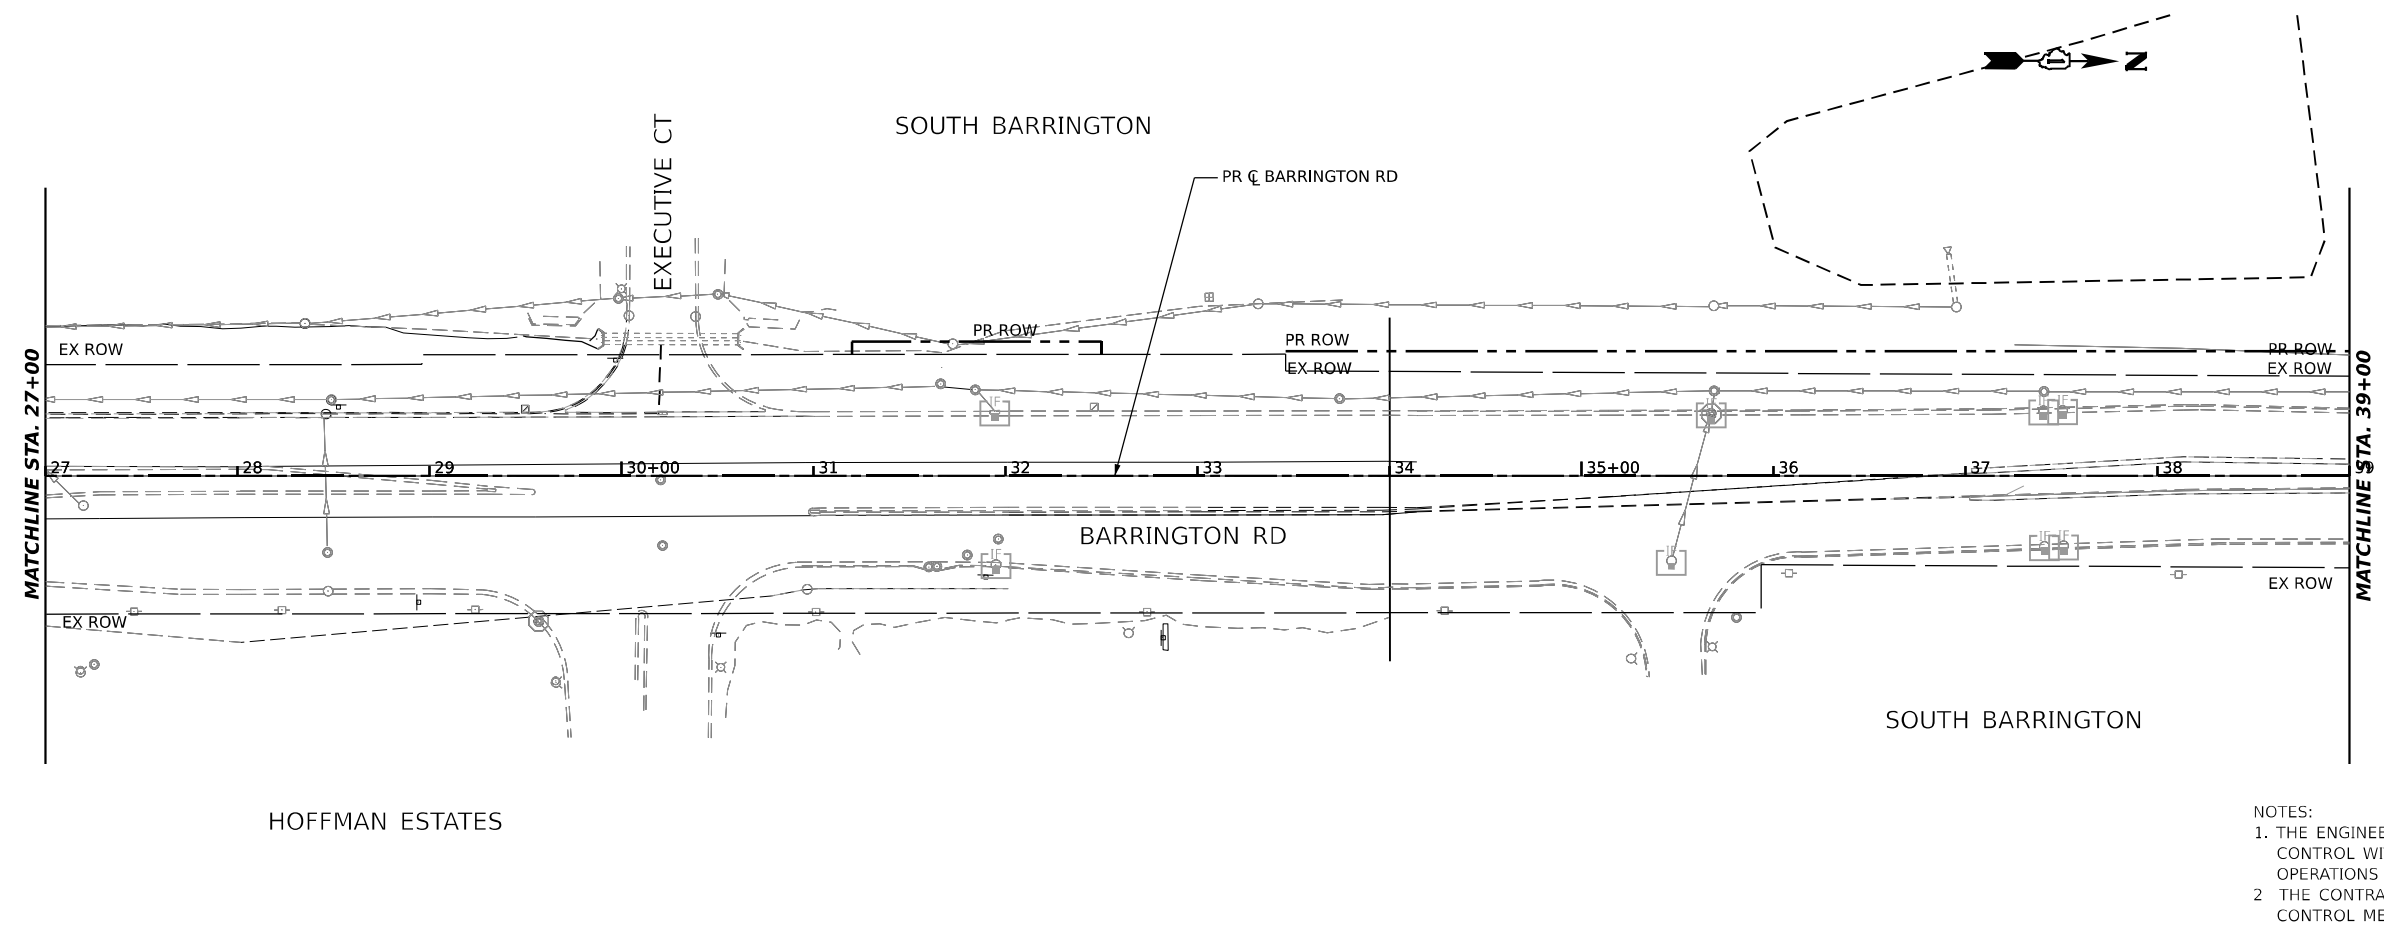

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

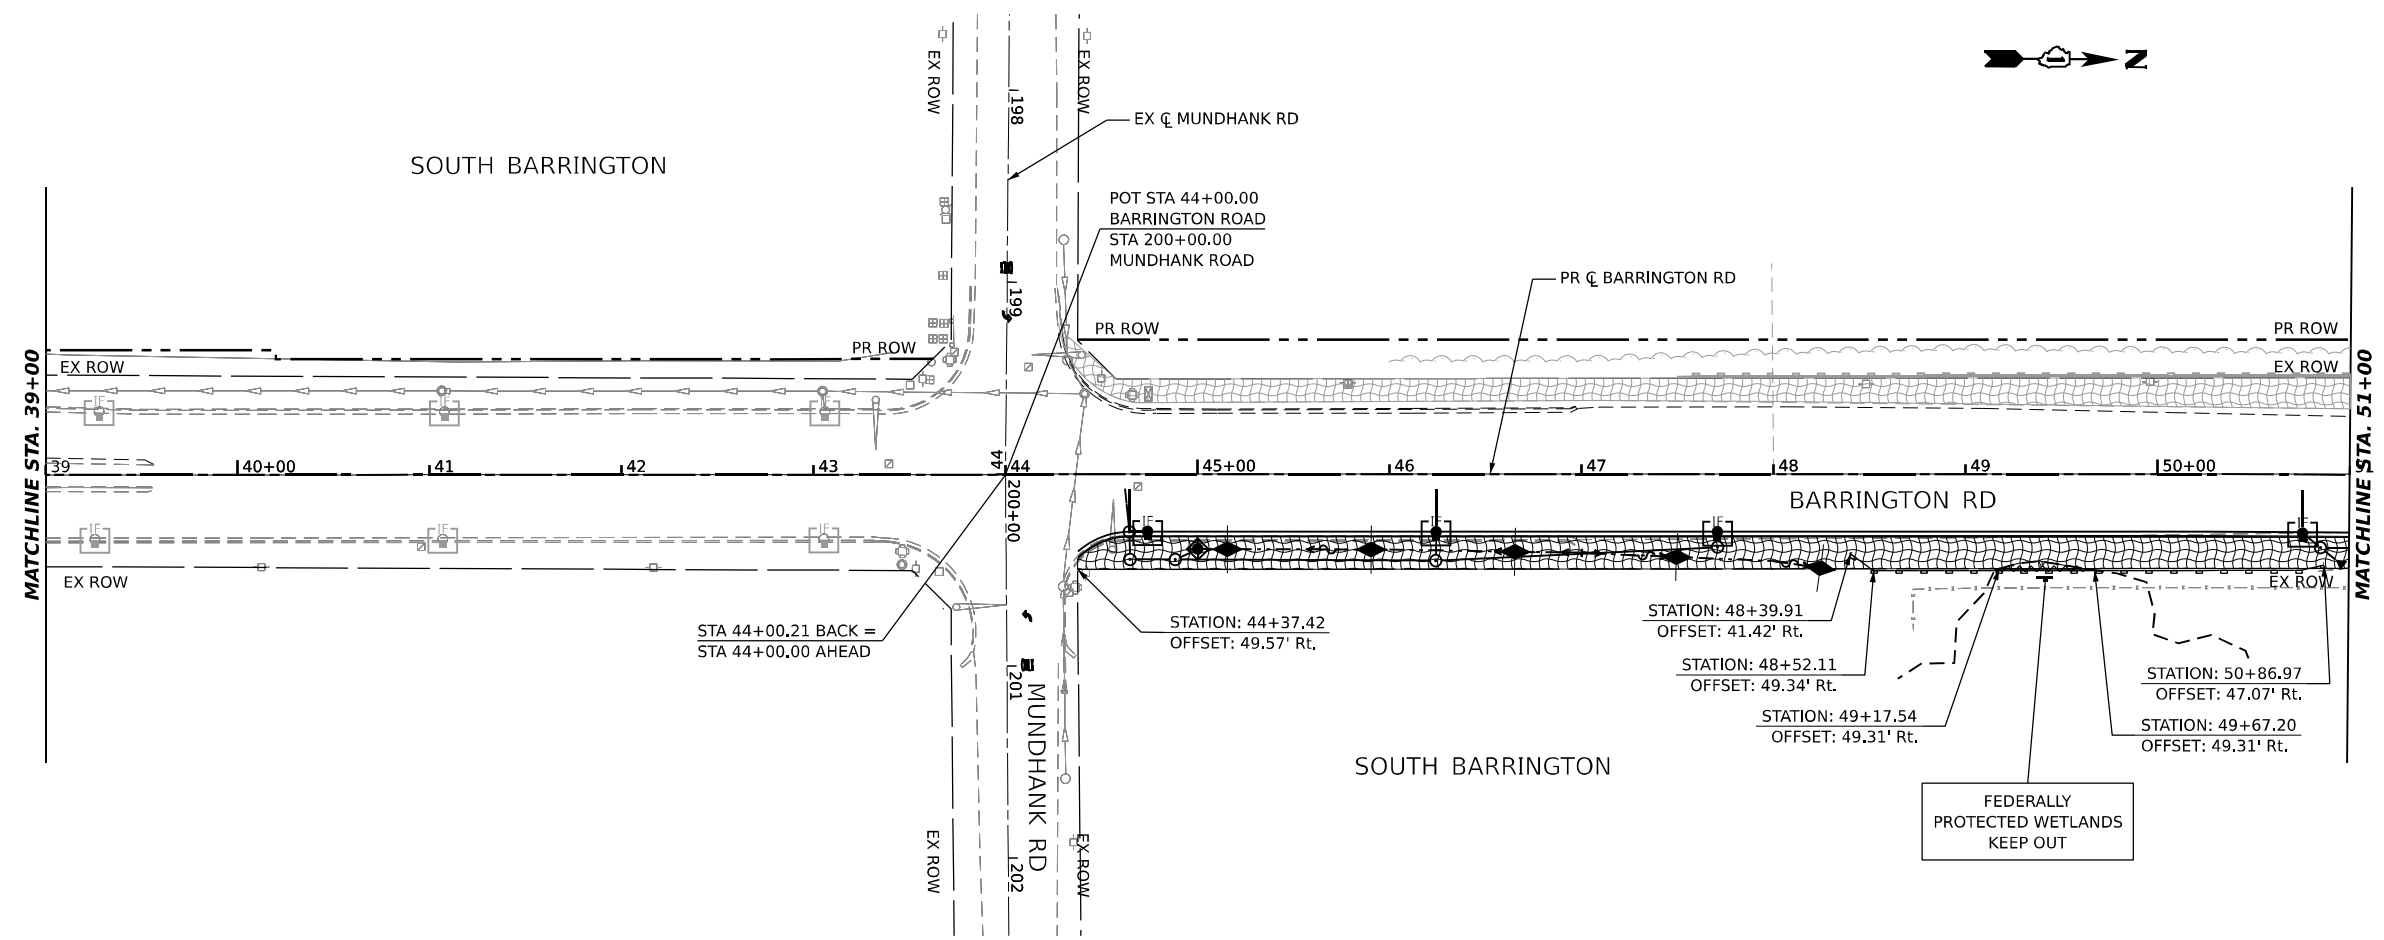

LEGEND

	TEMPORARY EROSION CONTROL SEEDING
	EROSION CONTROL BLANKET
	TEMPORARY DITCH CHECK
	TEMPORARY FENCE
	PERIMETER EROSION BARRIER
	INLET AND PIPE PROTECTION
	INLET FILTER
	WETLAND / W.O.U.S. IMPACTS
	WETLAND / W.O.U.S. BOUNDARY
	RIPRAP

MODEL: Plan 3 (Sheet)
FILE NAME: p:\projects\point01_sae\trans\scorp\p01\Documents\Projects_2020\CAD\01\010120018\CAD\02_Sheet\09-Temp Dm and Eros Control\02-51-Erosion Control Stage 1.dwg




USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/ in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


EROSION AND SEDIMENT CONTROL PLAN - STAGE 1

SCALE: 1:50 SHEET 8 OF 16 SHEETS STA. 27+00 TO STA. 51+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	164
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

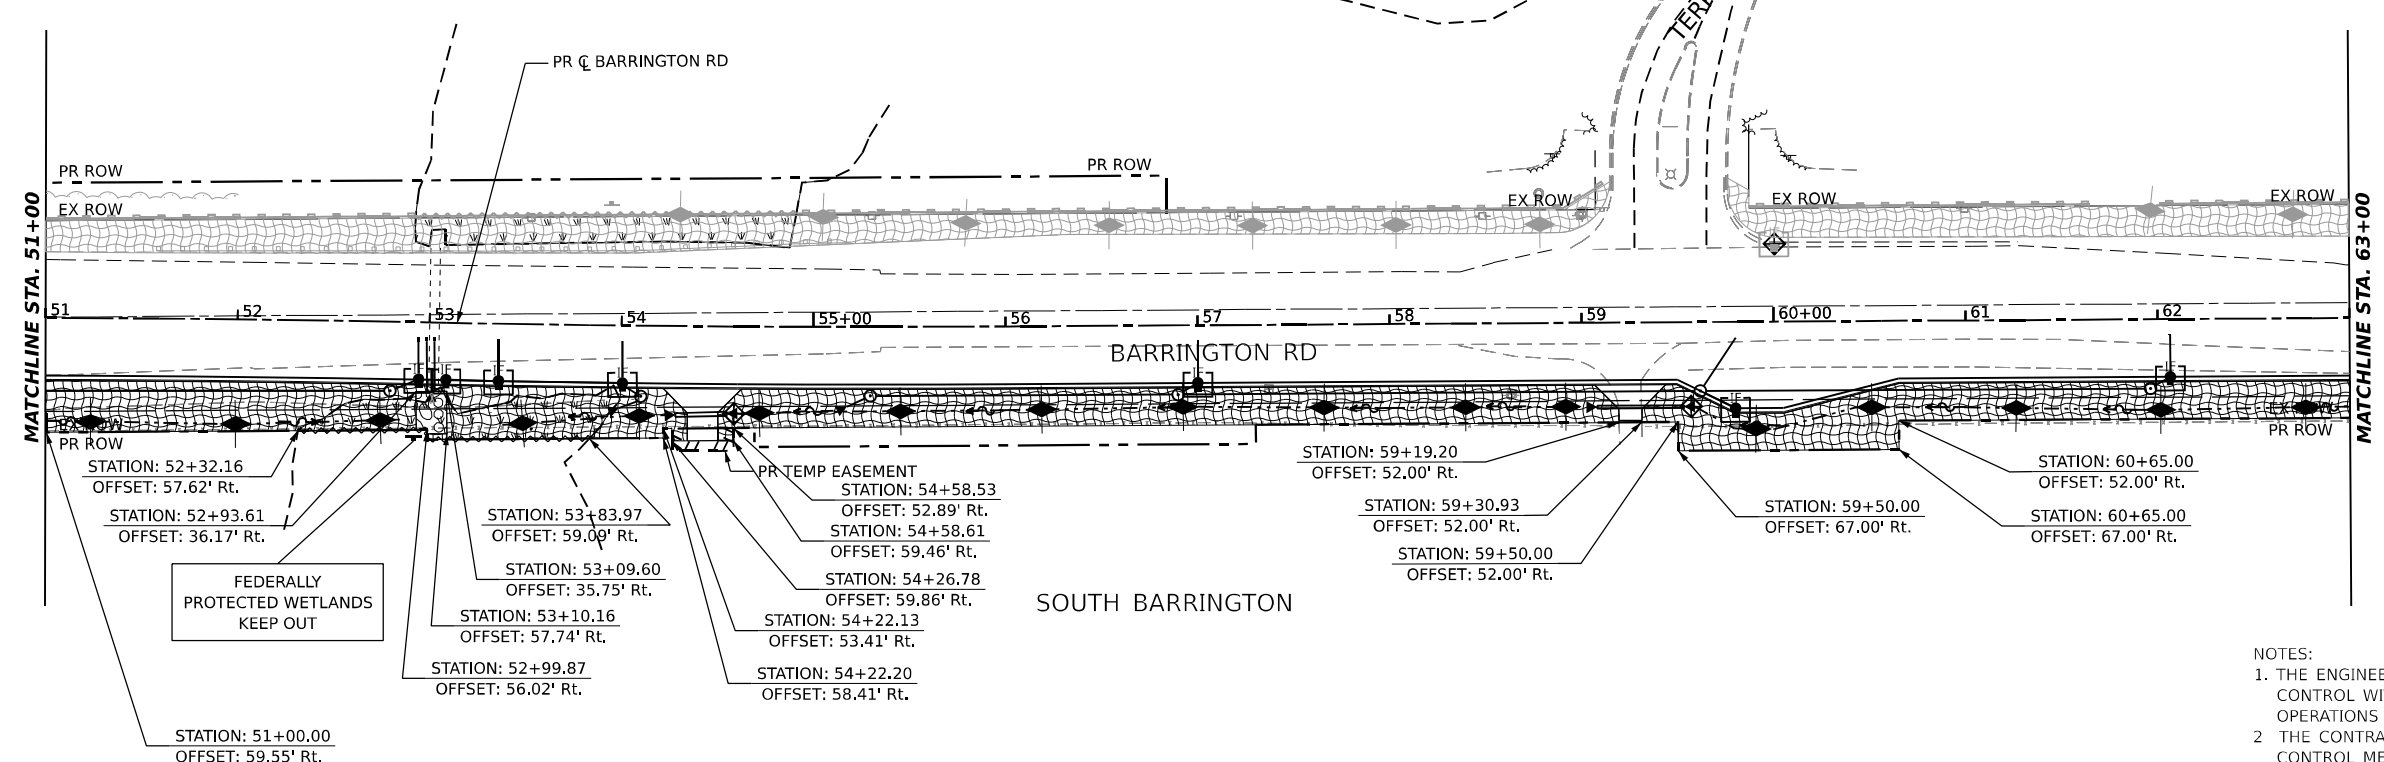

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

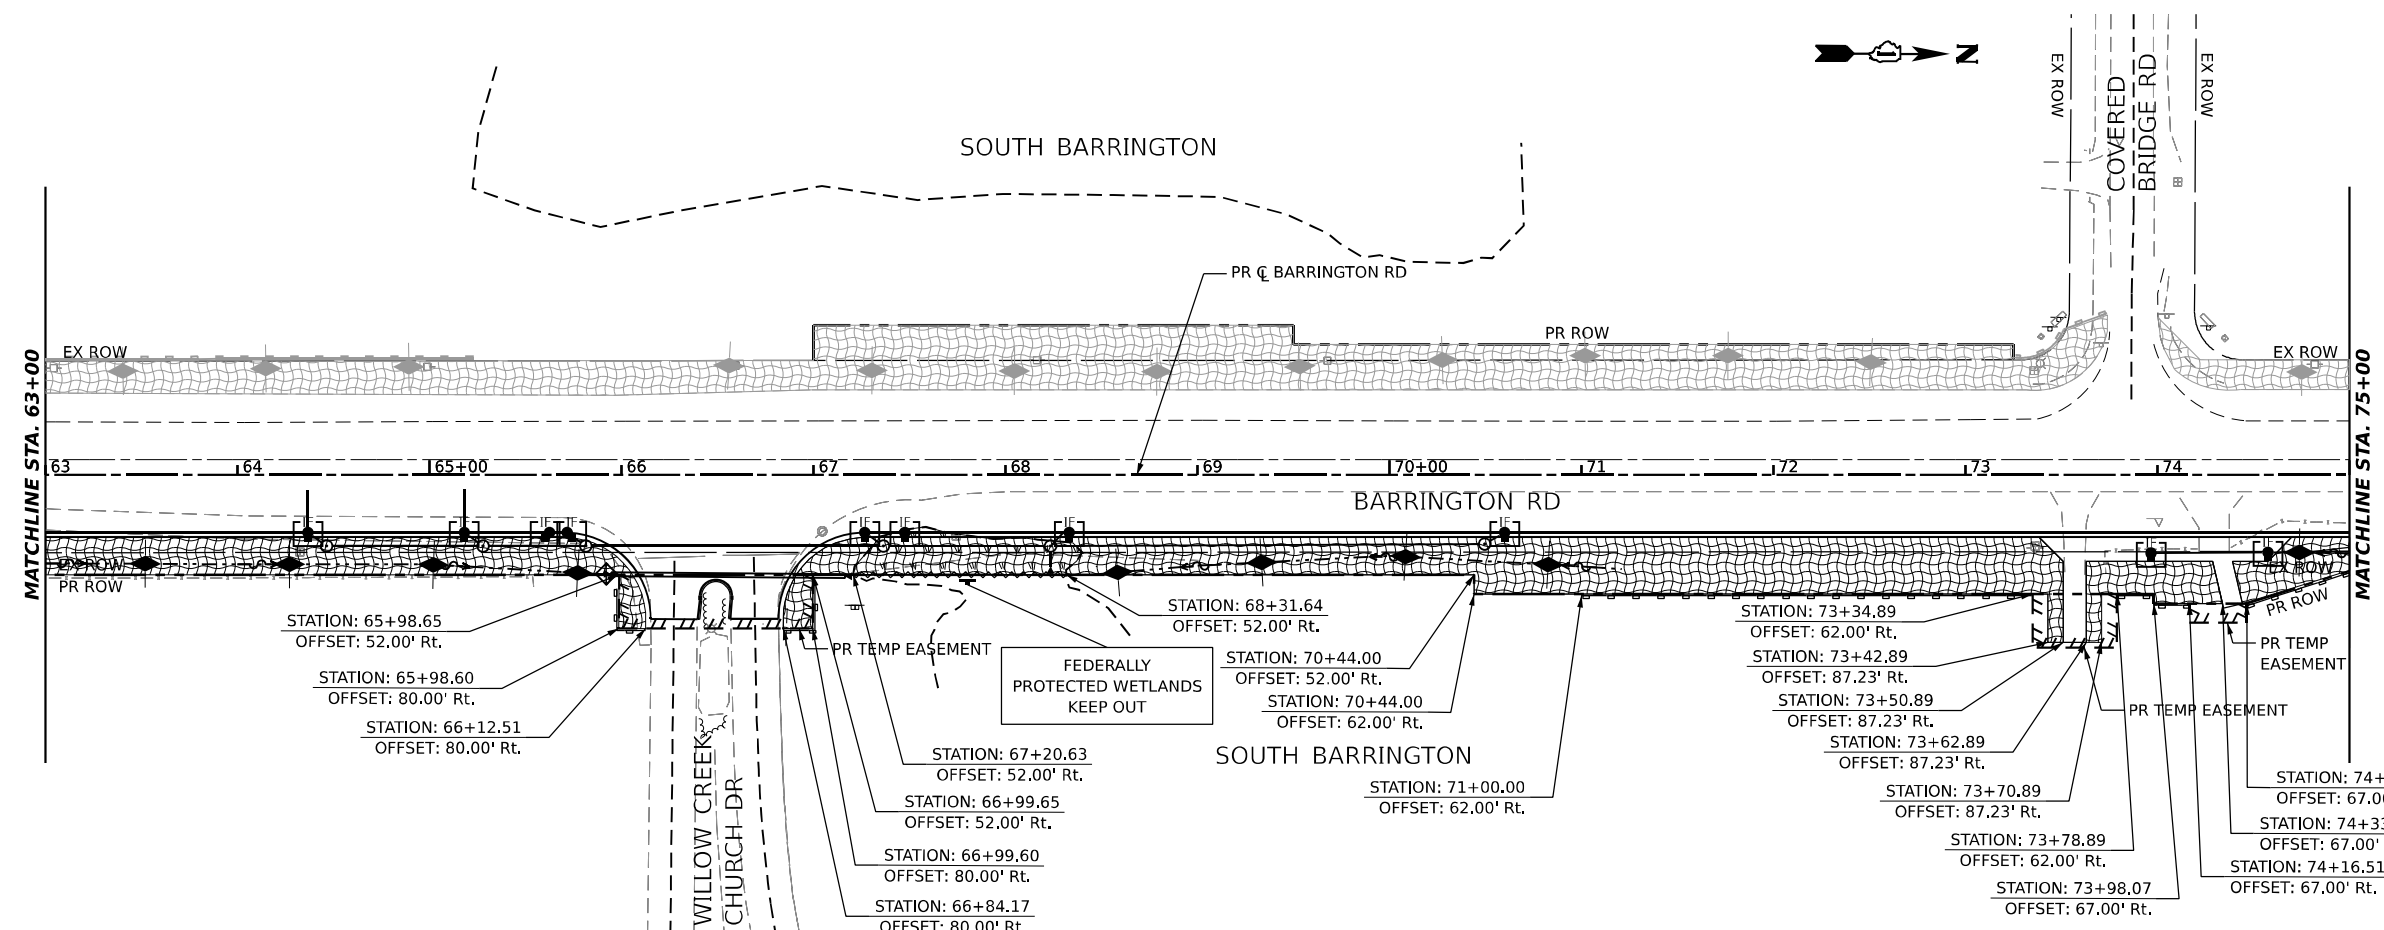

LEGEND

- TEMPORARY EROSION CONTROL SEEDING
- EROSION CONTROL BLANKET
- TEMPORARY DITCH CHECK
- TEMPORARY FENCE
- PERIMETER EROSION BARRIER
- INLET AND PIPE PROTECTION
- INLET FILTER
- WETLAND / W.O.U.S. IMPACTS
- WETLAND / W.O.U.S. BOUNDARY
- RIPRAP

MODEL: Plan 6 (Sheet)
FILE NAME: p:\projects\2019-161-W\Documents\Projects_2020\161-01\161-01-2020-01-18\CAD\02_Sheet\02-Temp Dm and Eros CHD\161-K33-54-Erosion Control Stage 1.dwg





USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/ in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


EROSION AND SEDIMENT CONTROL PLAN - STAGE 1

SCALE: 1:50 SHEET 9 OF 16 SHEETS STA. 51+00 TO STA. 75+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	165
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

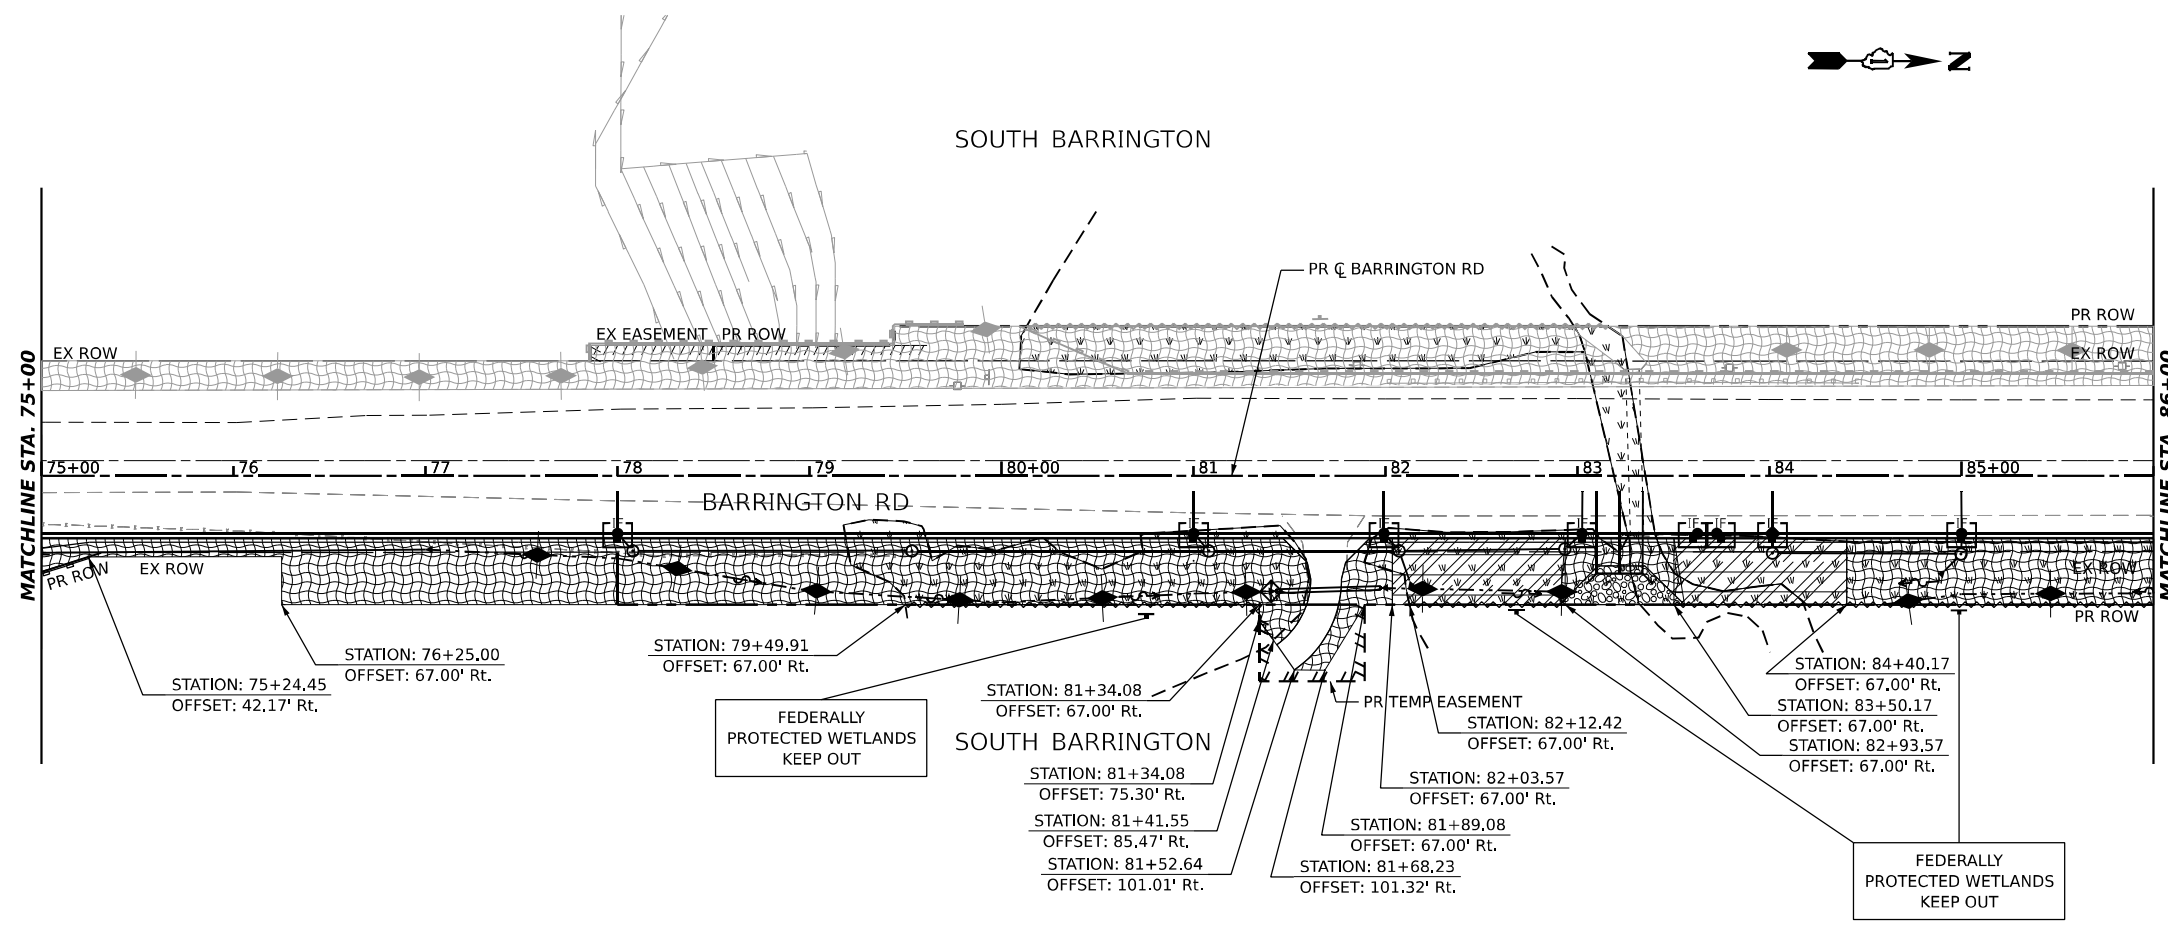

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

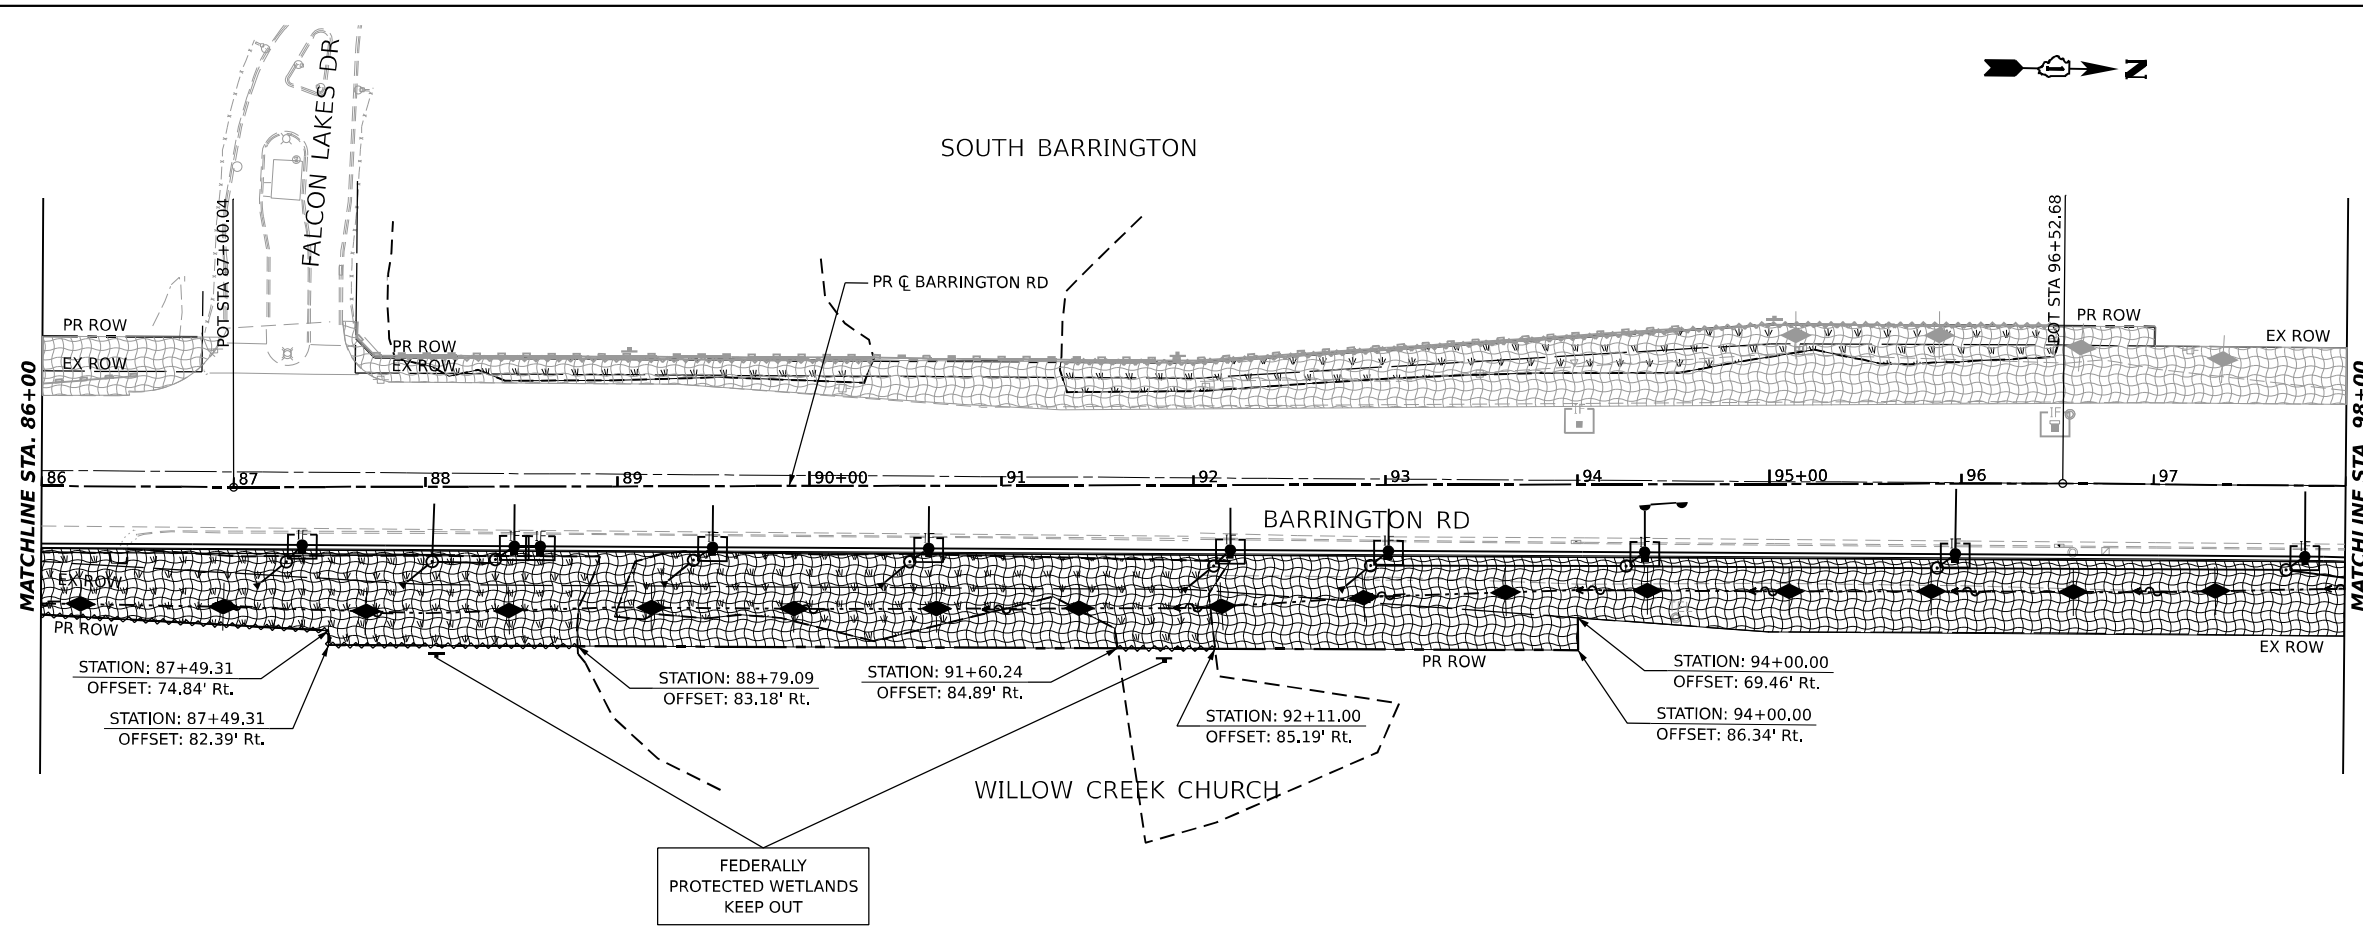

LEGEND

	TEMPORARY EROSION CONTROL SEEDING
	EROSION CONTROL BLANKET
	TEMPORARY DITCH CHECK
	TEMPORARY FENCE
	PERIMETER EROSION BARRIER
	INLET AND PIPE PROTECTION
	INLET FILTER
	WETLAND / W.O.U.S. IMPACTS
	WETLAND / W.O.U.S. BOUNDARY
	RIPRAP

MODEL: Plan 7 (Sheet)
 FILE NAME: p:\projects\2020\2019-161-W\Documents\Projects_2020\2019-161-W\CAD\02_Sheet\09-Temp Dim and Erosion Control Stage 1.dwg



USER NAME = Matthew Toussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/16"	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**



EROSION AND SEDIMENT CONTROL PLAN - STAGE 1

SCALE: 1:50 SHEET 10 OF 16 SHEETS STA. 75+00 TO STA. 98+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	166
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

SOUTH BARRINGTON

FOREST PRESERVE OF COOK COUNTY

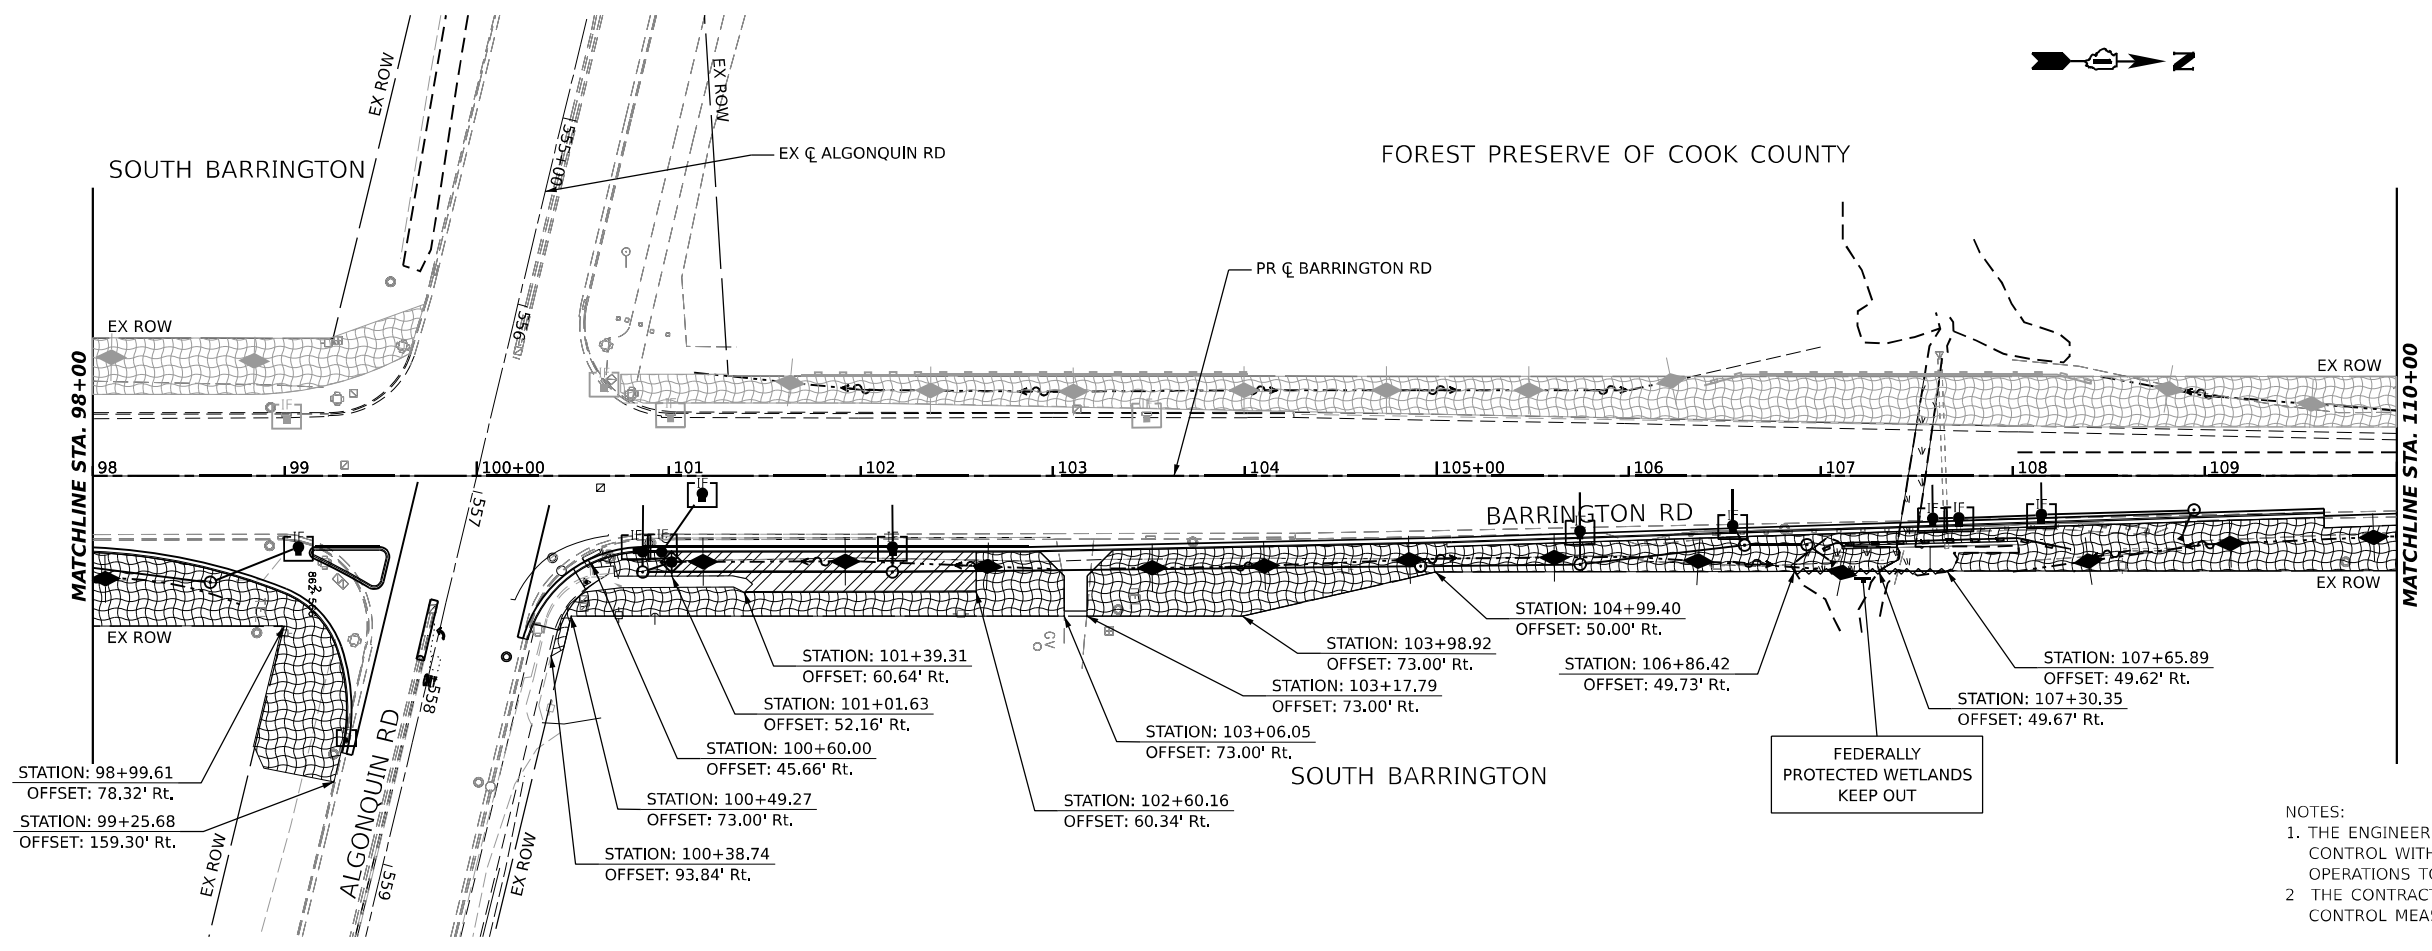



- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

LEGEND

- TEMPORARY EROSION CONTROL SEEDING
- EROSION CONTROL BLANKET
- TEMPORARY DITCH CHECK
- TEMPORARY FENCE
- PERIMETER EROSION BARRIER
- INLET AND PIPE PROTECTION
- INLET FILTER
- WETLAND / W.O.U.S. IMPACTS
- WETLAND / W.O.U.S. BOUNDARY
- RIPRAP

FOREST PRESERVE OF COOK COUNTY

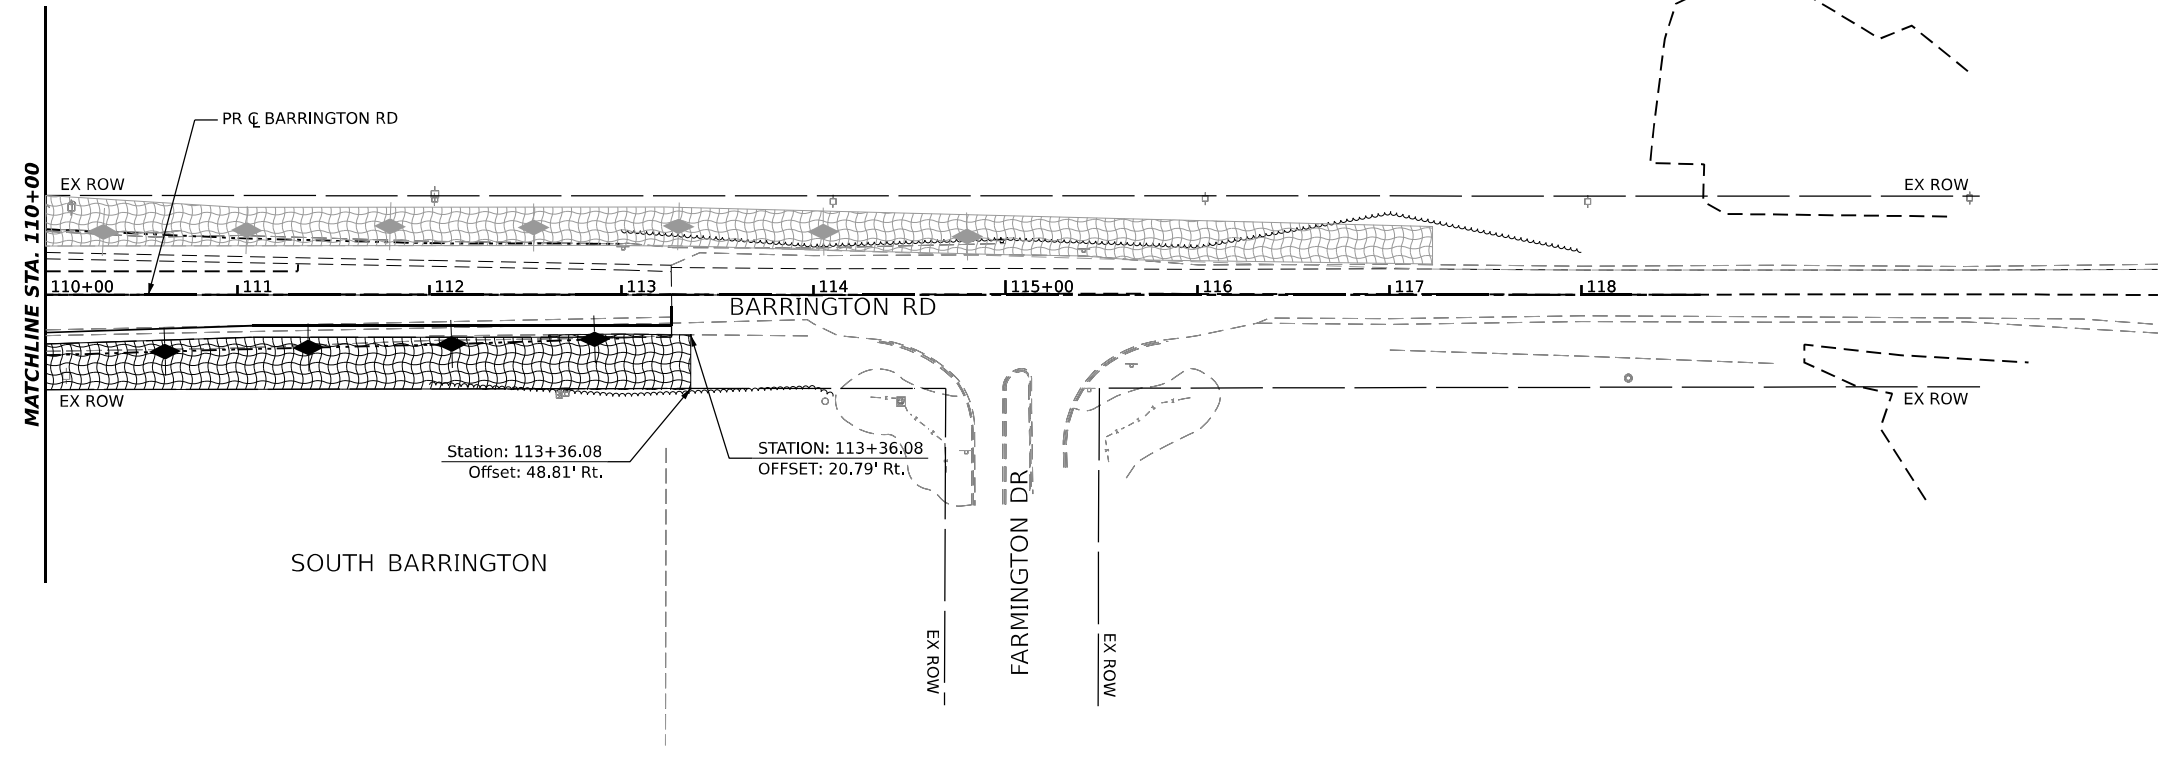

MODEL: Plan 0 (Sheet)
 FILE NAME: p:\projects\01-2020\01-2020\01-2020\18-CAD\02-Sheets\09-Temp Dm and Eros CND\18-03-54-Erosion Control Stage 1.dwg



USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/16"	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -



**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN - STAGE 1


SCALE: 1:50 SHEET 11 OF 16 SHEETS STA. 98+00 TO STA. 118+61.86

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	167
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

MODEL: Plan 1 (Sheet)
 FILE NAME: p:\projects\2019\2019-161-W\Documents\Projects_2020\CAD\01\0101200118\CAD\02_Street\09-Temp_Dim_and_Eros_CDD\162633-547-Erosion_Control_Stage_2.dwg

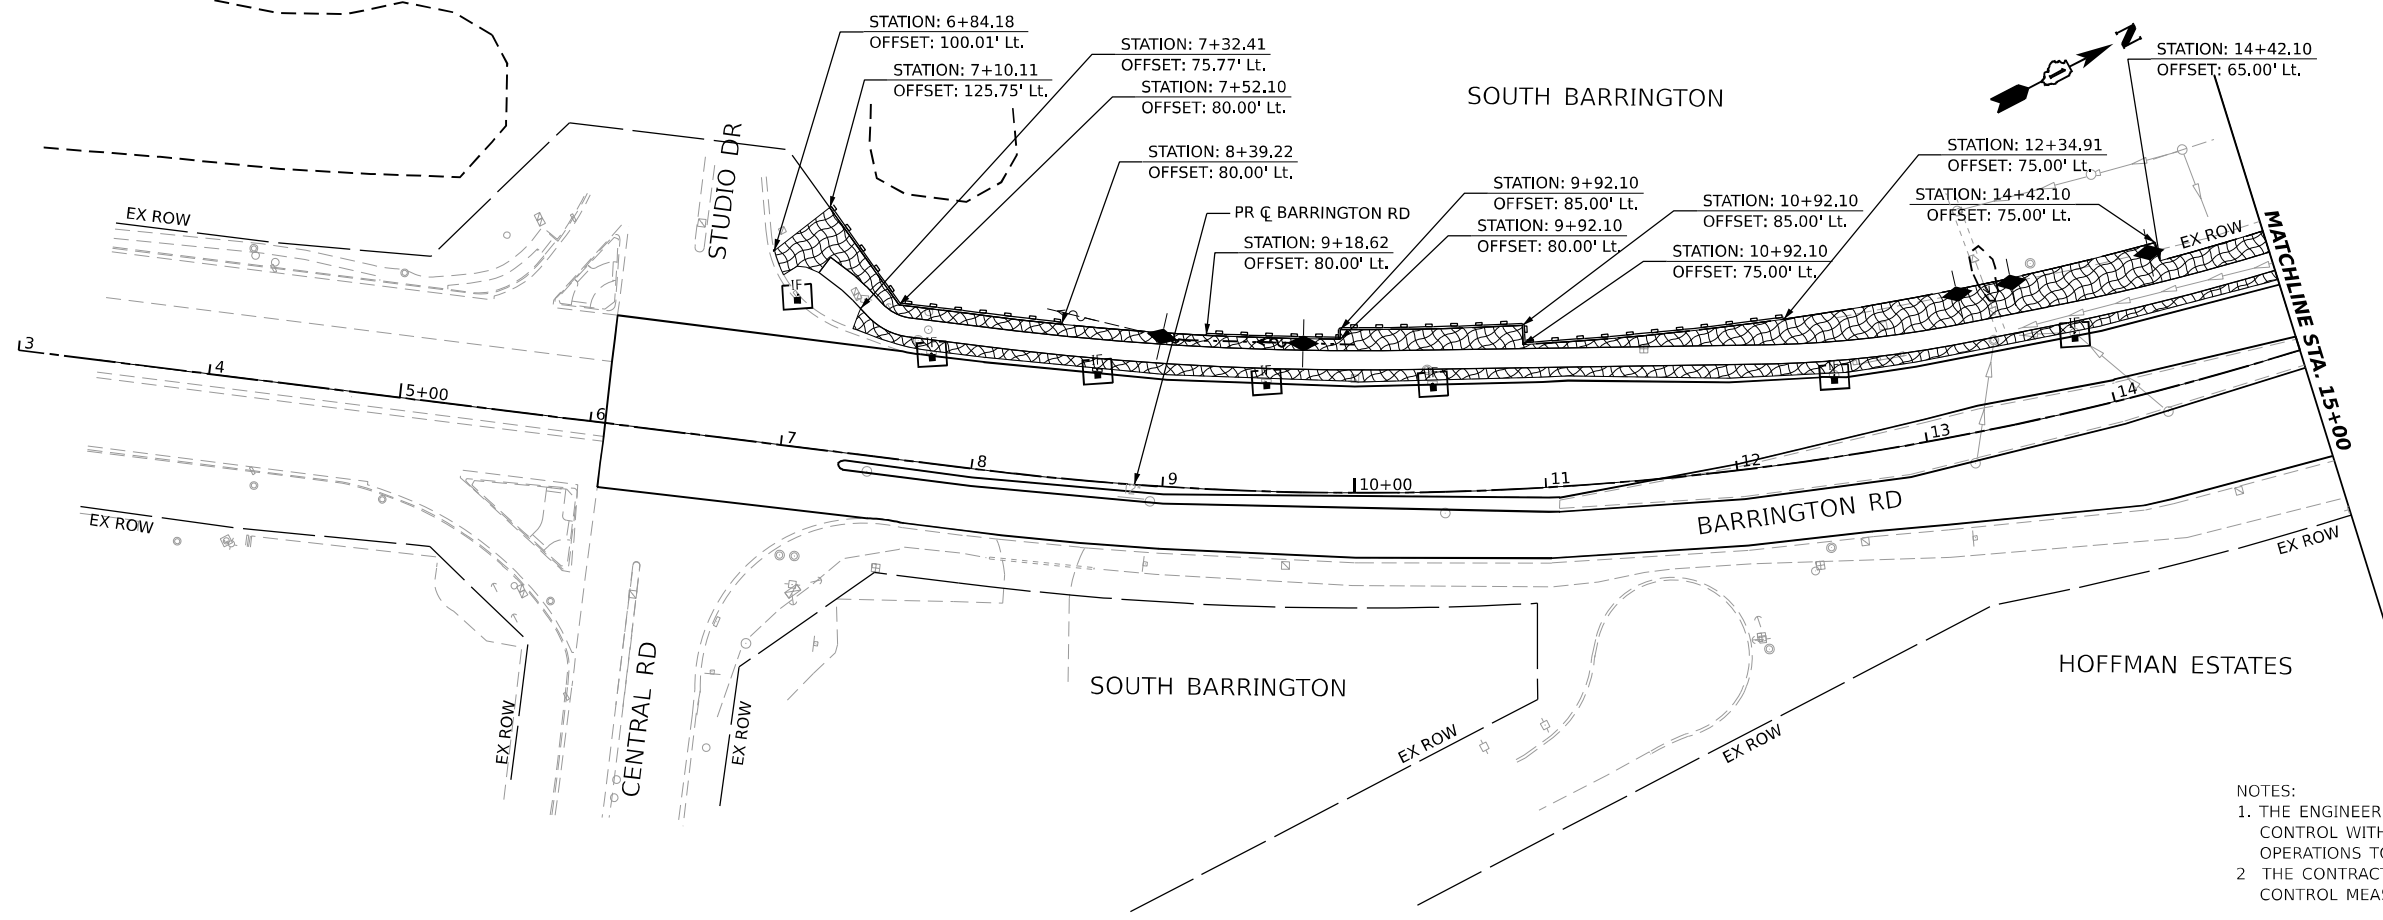

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

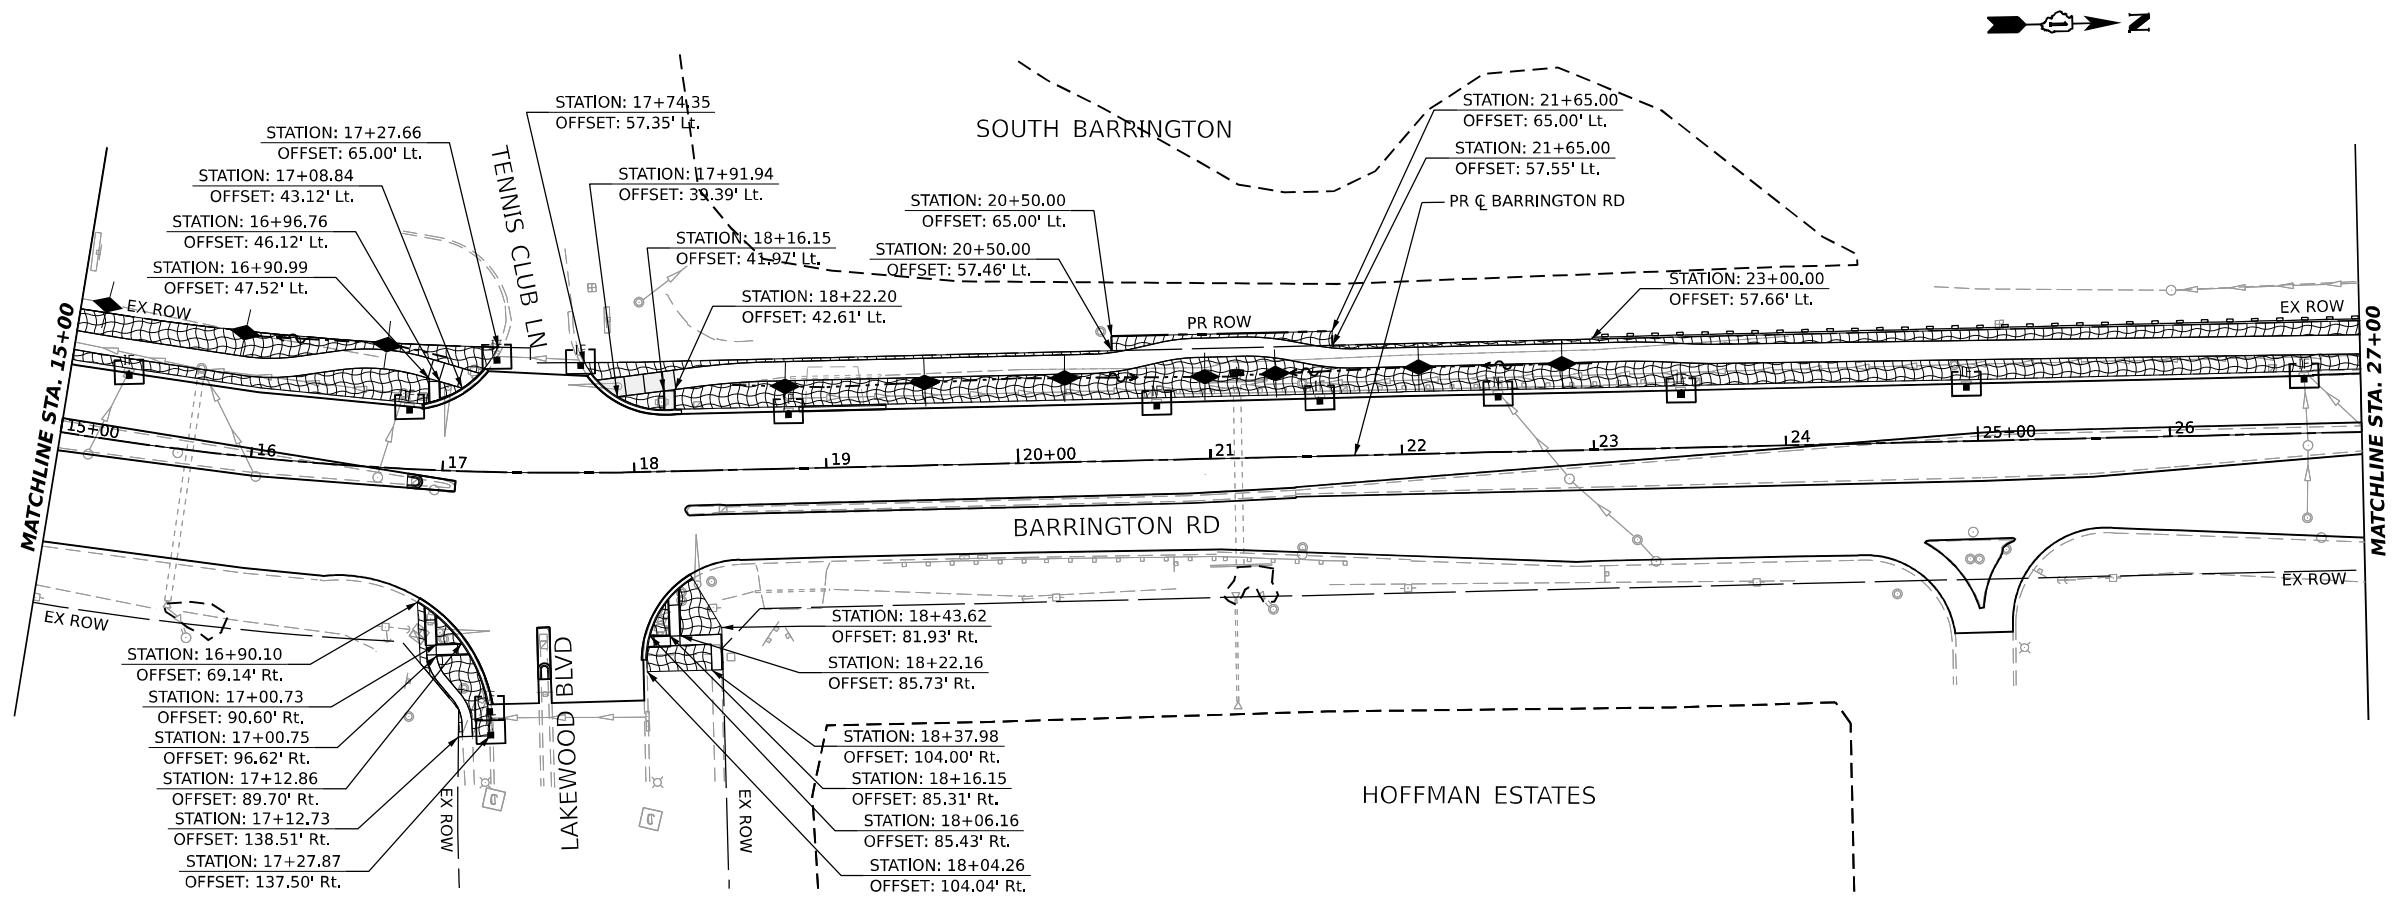

LEGEND

- TEMPORARY EROSION CONTROL SEEDING
- EROSION CONTROL BLANKET
- TEMPORARY DITCH CHECK
- TEMPORARY FENCE
- PERIMETER EROSION BARRIER
- INLET AND PIPE PROTECTION
- INLET FILTER
- WETLAND / W.O.U.S. IMPACTS
- WETLAND / W.O.U.S. BOUNDARY
- RIPRAP




USER NAME = Matthew Toussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/16"	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


EROSION AND SEDIMENT CONTROL PLAN - STAGE 2

SCALE: 1:50 SHEET 12 OF 16 SHEETS STA. 3+00 TO STA. 27+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	168
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

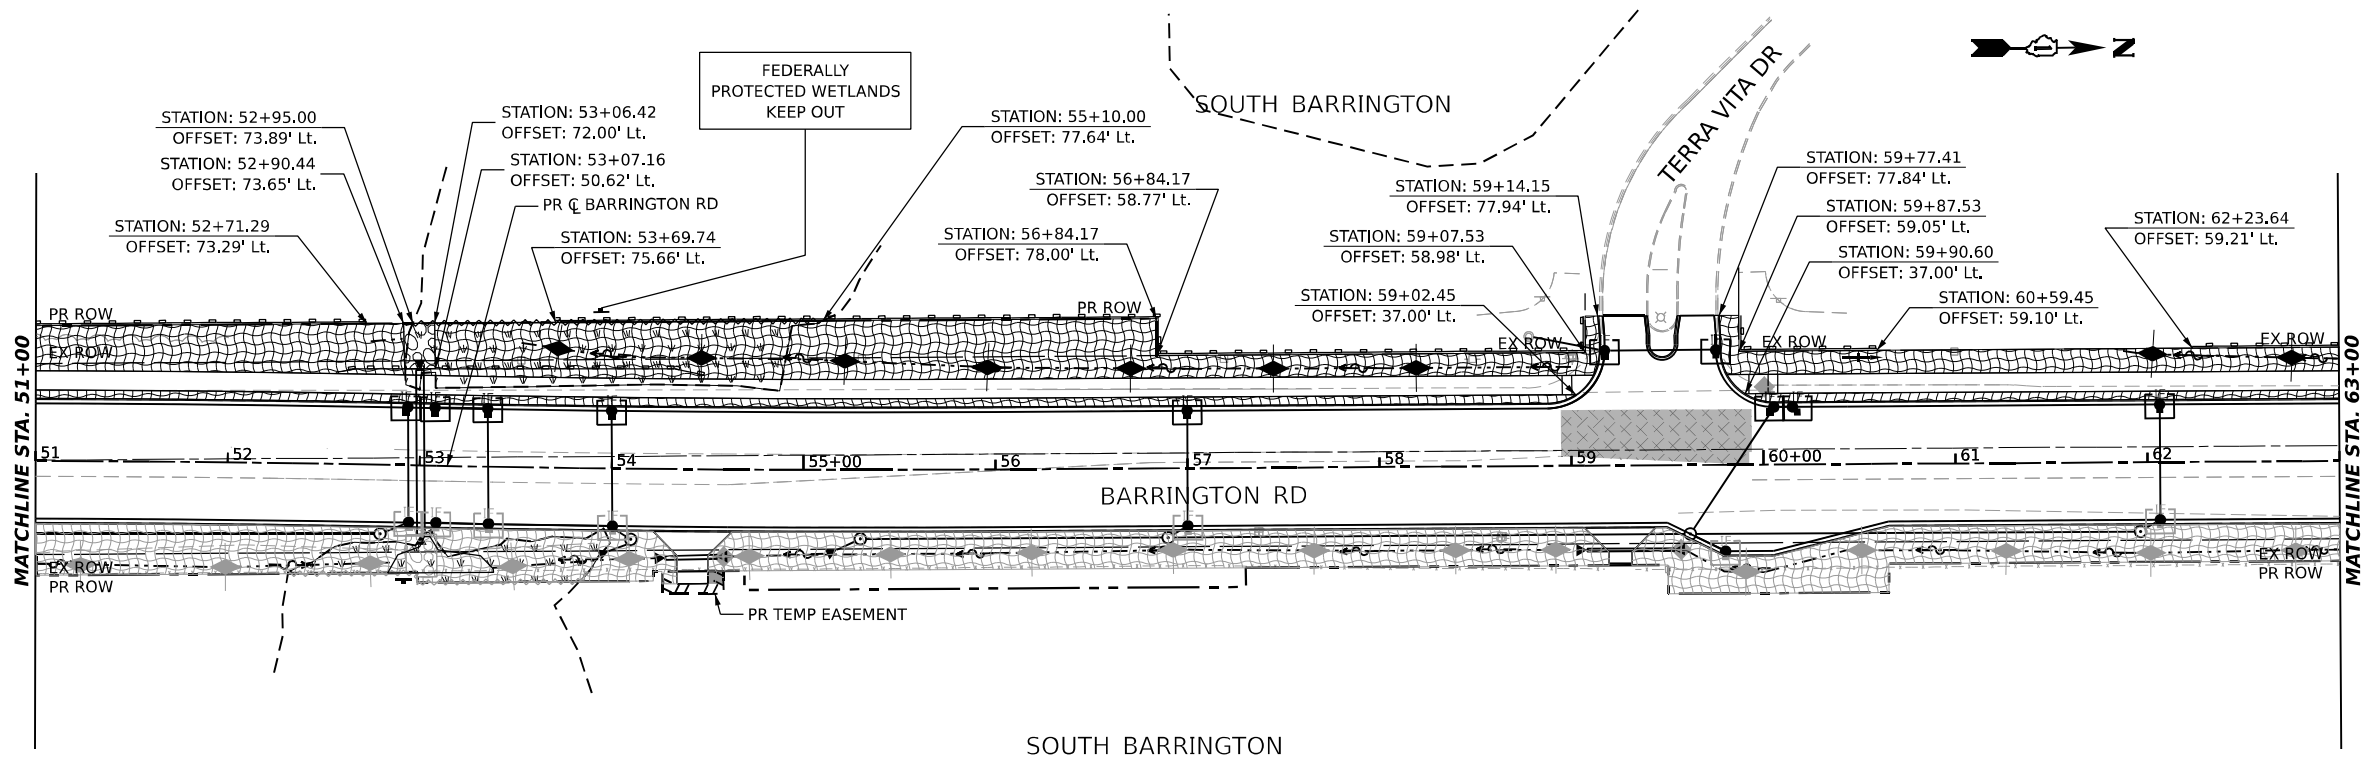

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

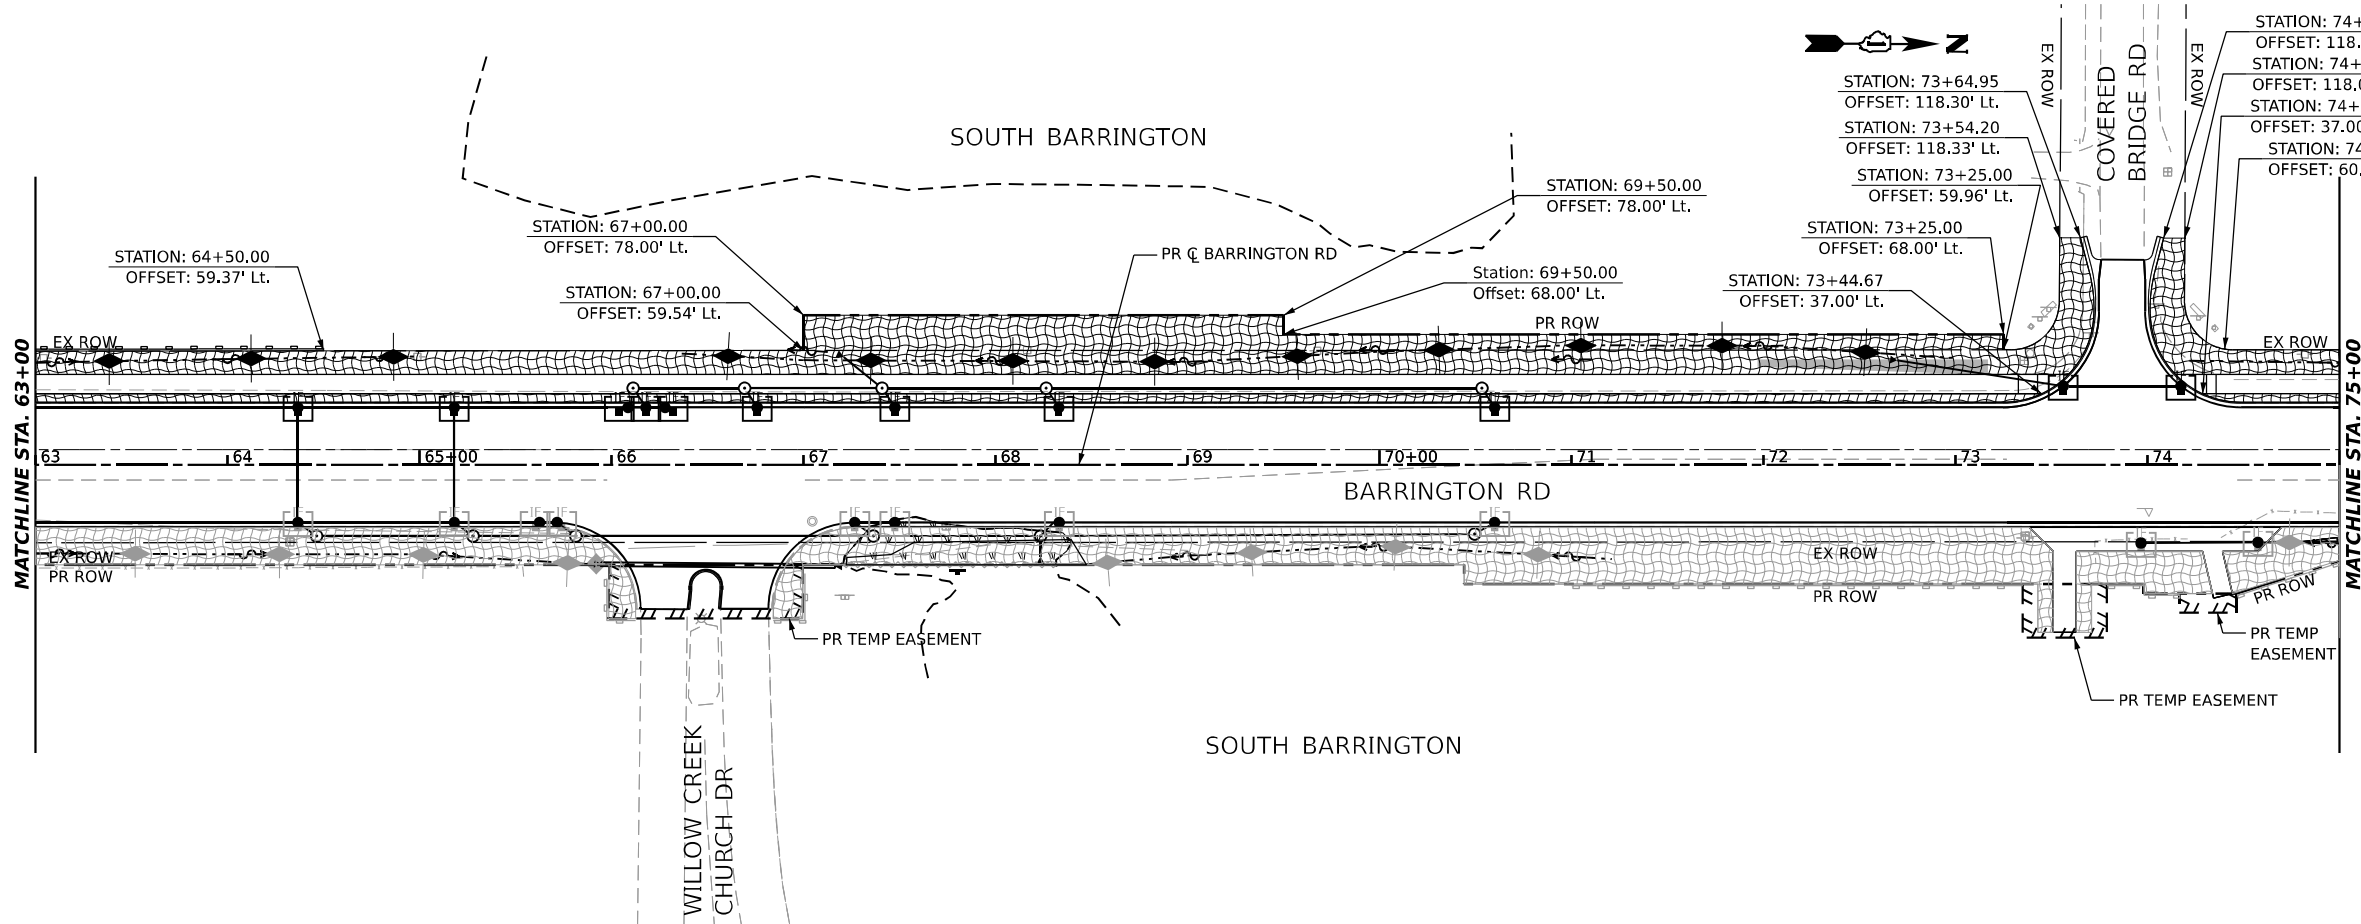

LEGEND

- TEMPORARY EROSION CONTROL SEEDING
- EROSION CONTROL BLANKET
- TEMPORARY DITCH CHECK
- TEMPORARY FENCE
- PERIMETER EROSION BARRIER
- INLET AND PIPE PROTECTION
- INLET FILTER
- WETLAND / W.O.U.S. IMPACTS
- WETLAND / W.O.U.S. BOUNDARY
- RIPRAP

MODEL: Plan 5 (Sheet) FILE NAME: P:\projects\100120018\CAD\02_Sheet\09-Temp Dim and Erosion Control\100120018-CAD\02_Sheet\09-Temp Dim and Erosion Control Stage 2.dwg



USER NAME = MatthewToussaint
 DESIGNED - BAB
 DRAWN - IAK
 PLOT SCALE = 0.16666633 1/16 in.
 CHECKED - CMW
 PLOT DATE = 2/3/2026
 DATE - 02/02/2026


REVISED -
 REVISED -
 REVISED -
 REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


EROSION AND SEDIMENT CONTROL PLAN - STAGE 2

SCALE: 1:50 SHEET 14 OF 16 SHEETS STA. 51+00 TO STA. 75+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	170
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

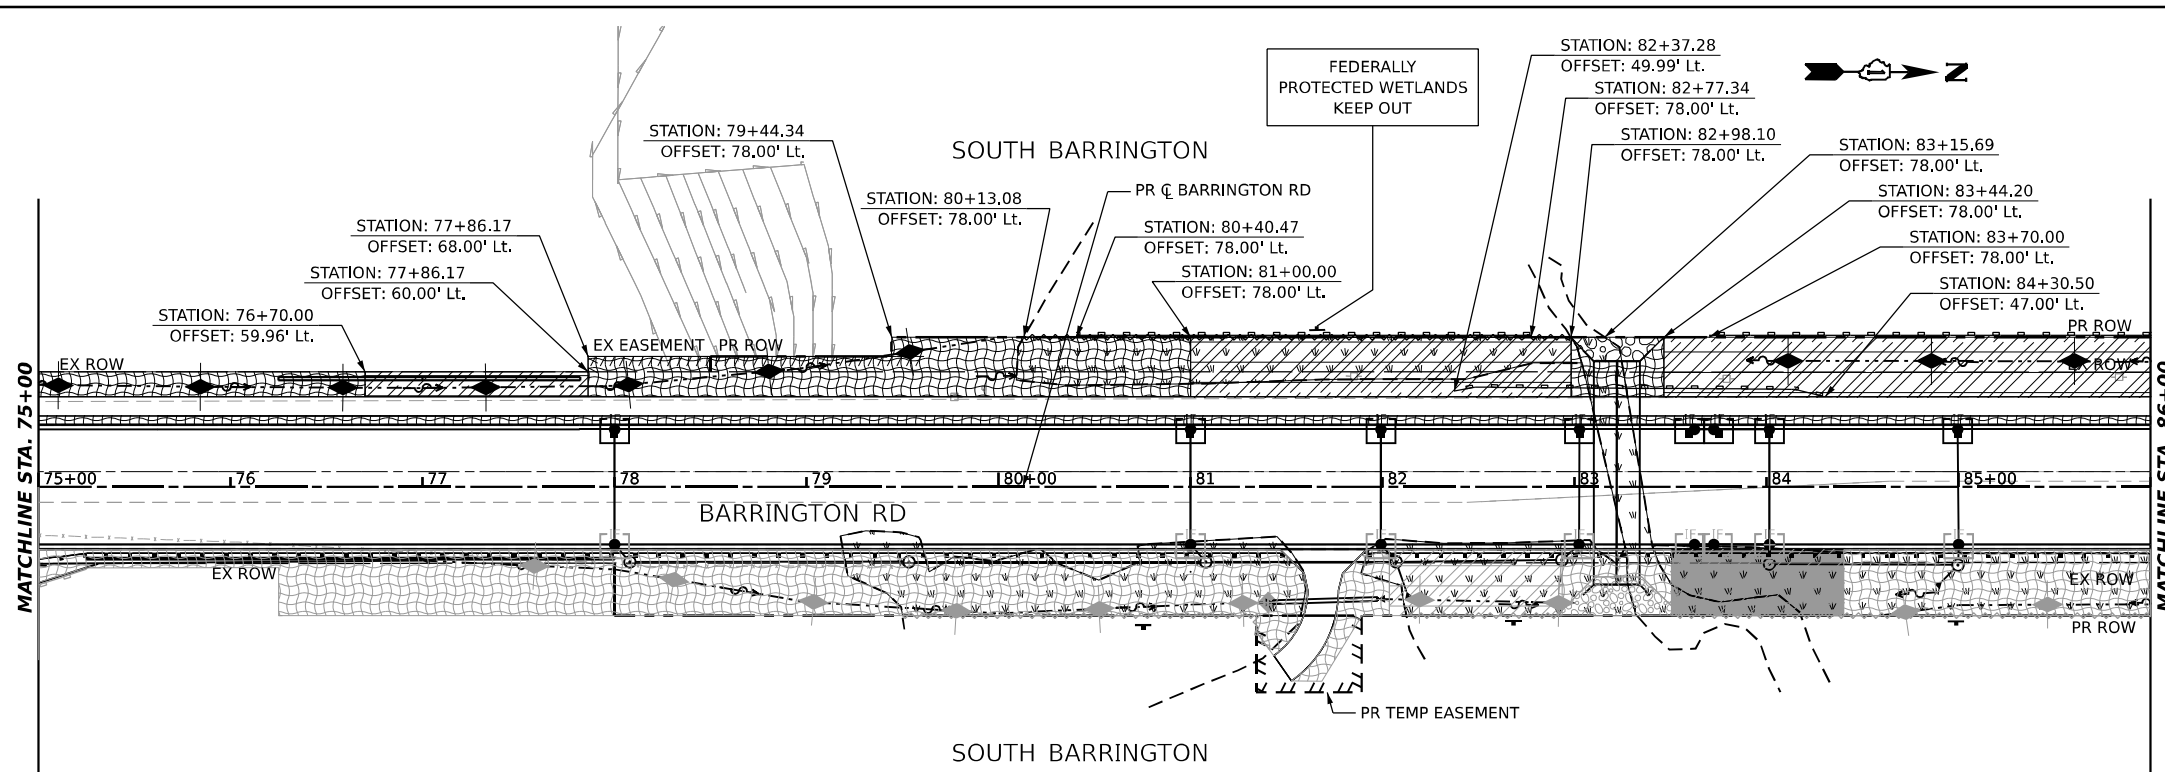

- NOTES:
1. THE ENGINEER SHALL CONDUCT A FIELD REVIEW FOR EROSION AND SEDIMENT CONTROL WITH THE PRIME AND SUBCONTRACTORS PRIOR TO ANY EARTHWORK OPERATIONS TO DETERMINE TIMING OF CONTROL MEASURES.
 2. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.

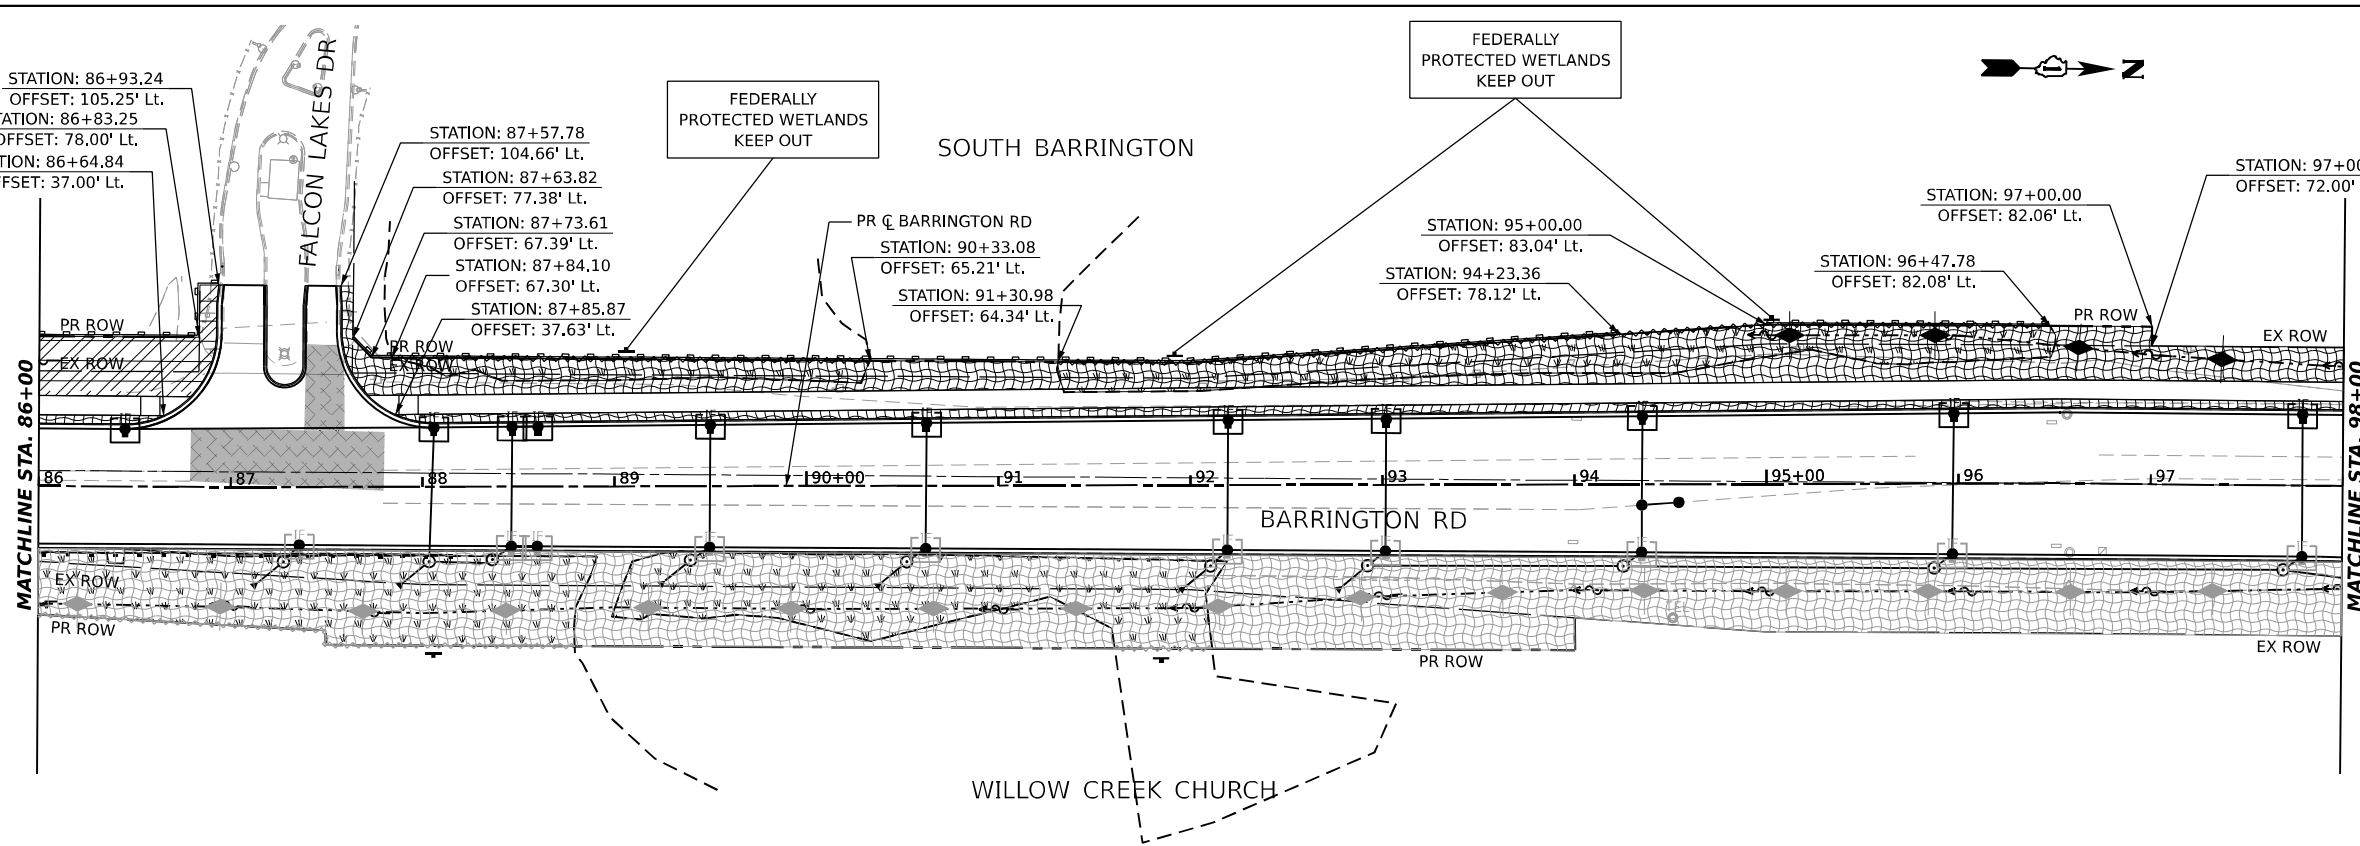

LEGEND

- TEMPORARY EROSION CONTROL SEEDING
- EROSION CONTROL BLANKET
- TEMPORARY DITCH CHECK
- TEMPORARY FENCE
- PERIMETER EROSION BARRIER
- INLET AND PIPE PROTECTION
- INLET FILTER
- WETLAND / W.O.U.S. IMPACTS
- WETLAND / W.O.U.S. BOUNDARY
- RIPRAP

MODEL: Plan 7 (Sheet)
 FILE NAME: p:\projects\2019-161-W\Documents\Projects_2020\CH401\01\20200118\CA\02 - Street\09-Temp Dm and Eros CH401\ER3354-Erosion Control Stage 2.dgn






USER NAME = MatthewToussaint	DESIGNED - BAB	REVISED -
PLOT SCALE = 0.16666633 1/ in.	DRAWN - IAK	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN - STAGE 2			
SCALE: 1:50	SHEET 15 OF 16 SHEETS	STA. 75+00	TO STA. 98+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 171
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

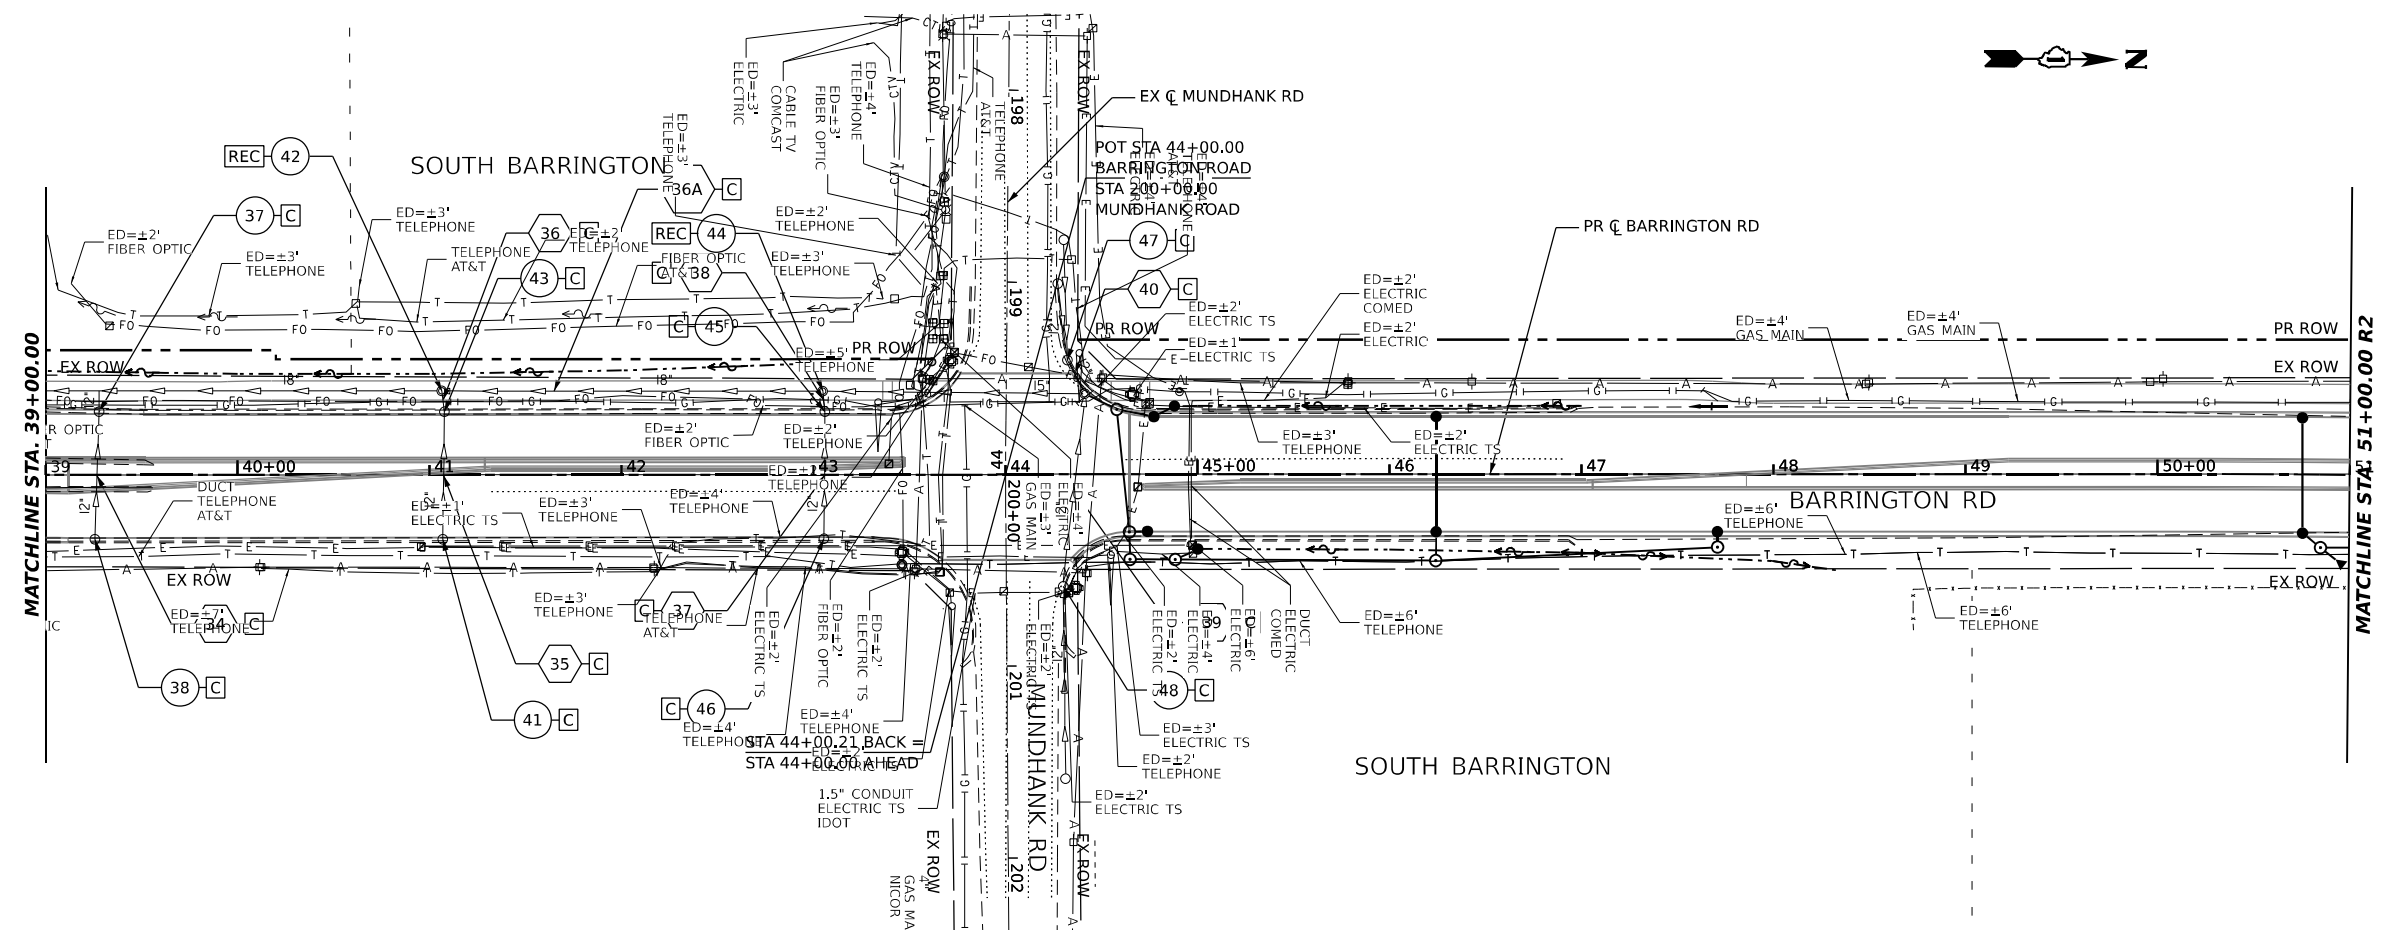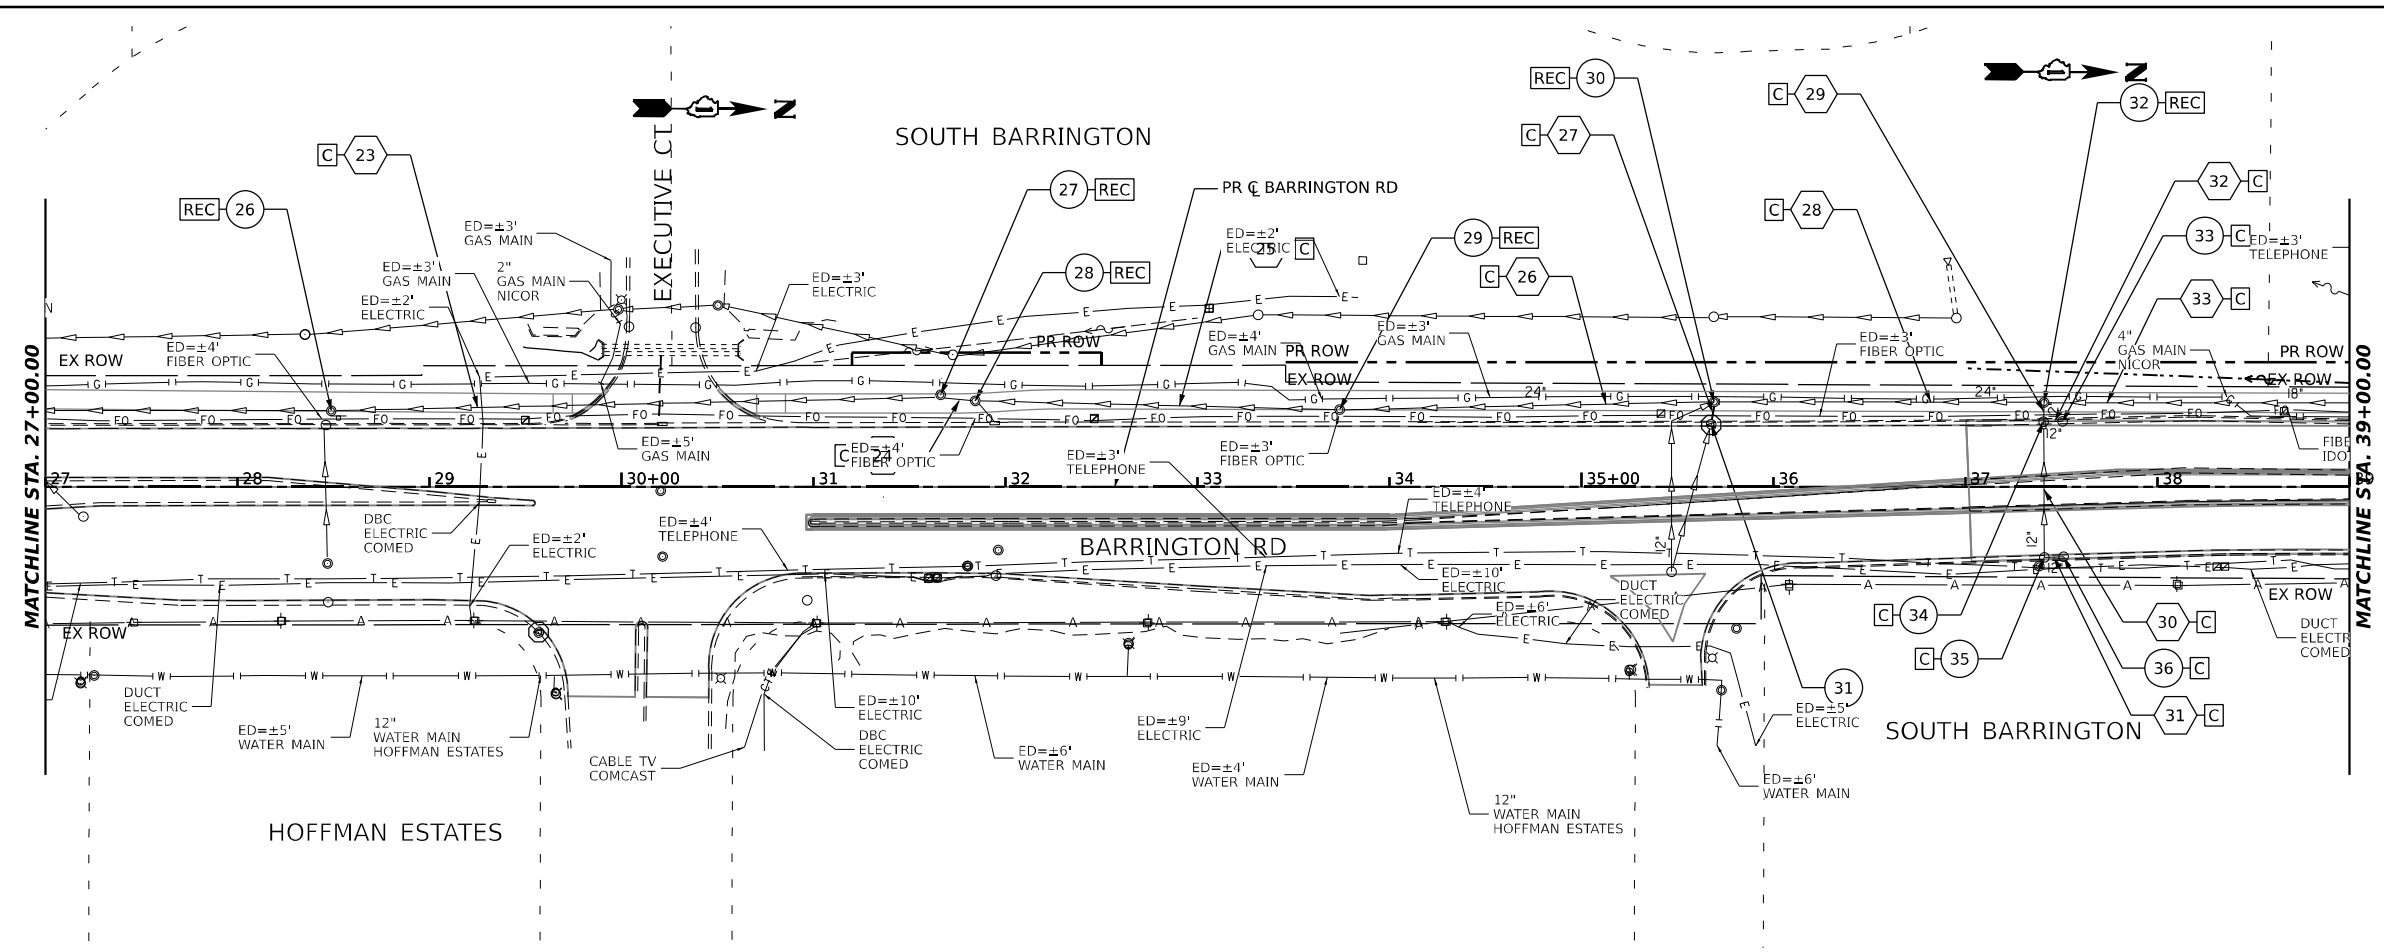

LEGEND

- (X) PIPE NUMBER
- (X) STRUCTURE NUMBER
- (A) STRUCTURE TO BE ADJUSTED
- (C) PIPE TO BE CLEANED
- (REC) STRUCTURE TO BE RECONSTRUCTED
- (X) STRUCTURE TO BE REMOVED
- (---) STORM SEWER REMOVAL AND PIPE CULVERT REMOVAL

MODEL: Plan 3 (Sheet)
 FILE NAME: p:\projects\03-2019-161-W\Drawings\Projects_2020\CH4401.001\20018\CAD\02_Sheet\01.dwg
 User: MatthewToussaint






USER NAME = MatthewToussaint	DESIGNED - MRH	REVISED -
PLOT SCALE = 0.16666633 1/16"	DRAWN - MRH	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DRAINAGE REMOVAL PLAN			
SCALE: 1:50	SHEET 2	OF 5 SHEETS	STA. 27+00.00 TO STA. 51+00.00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	174
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

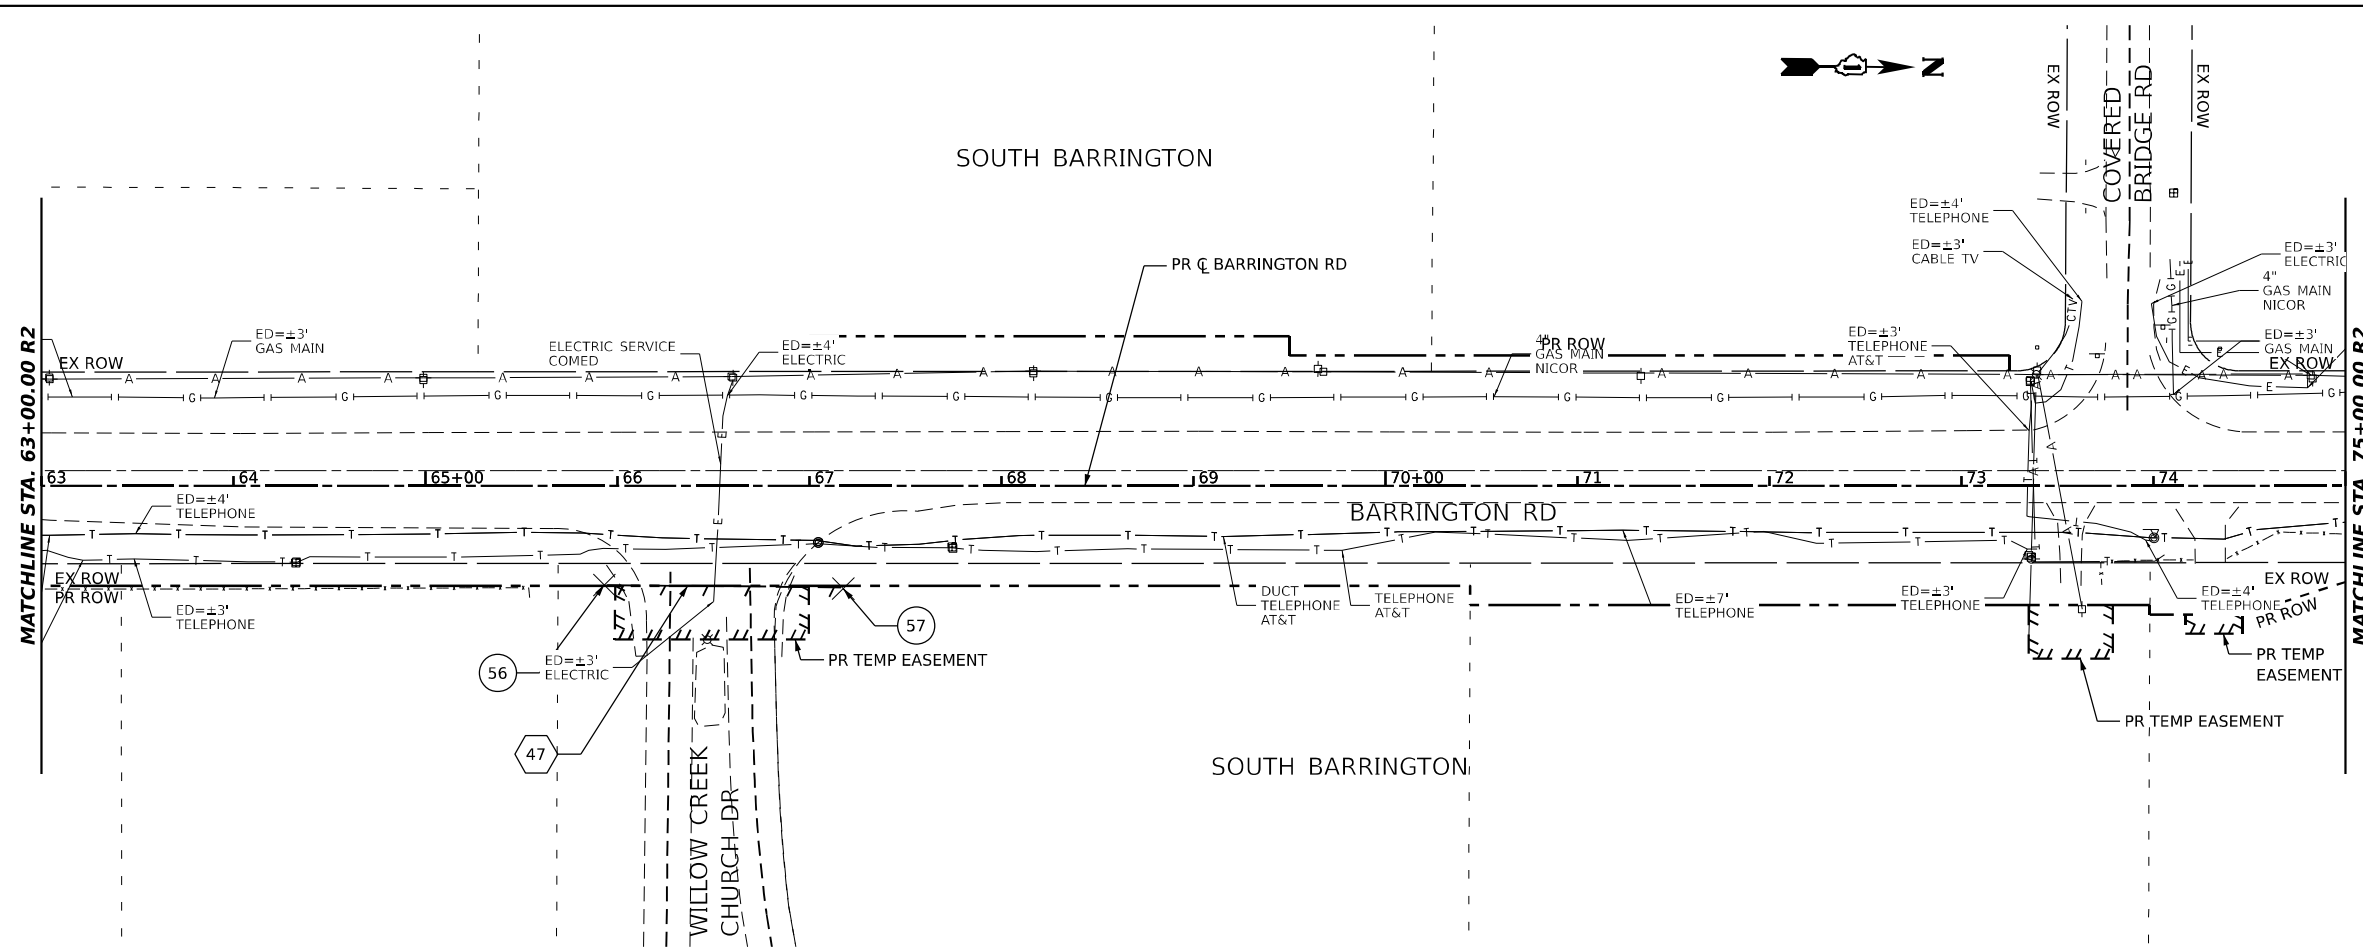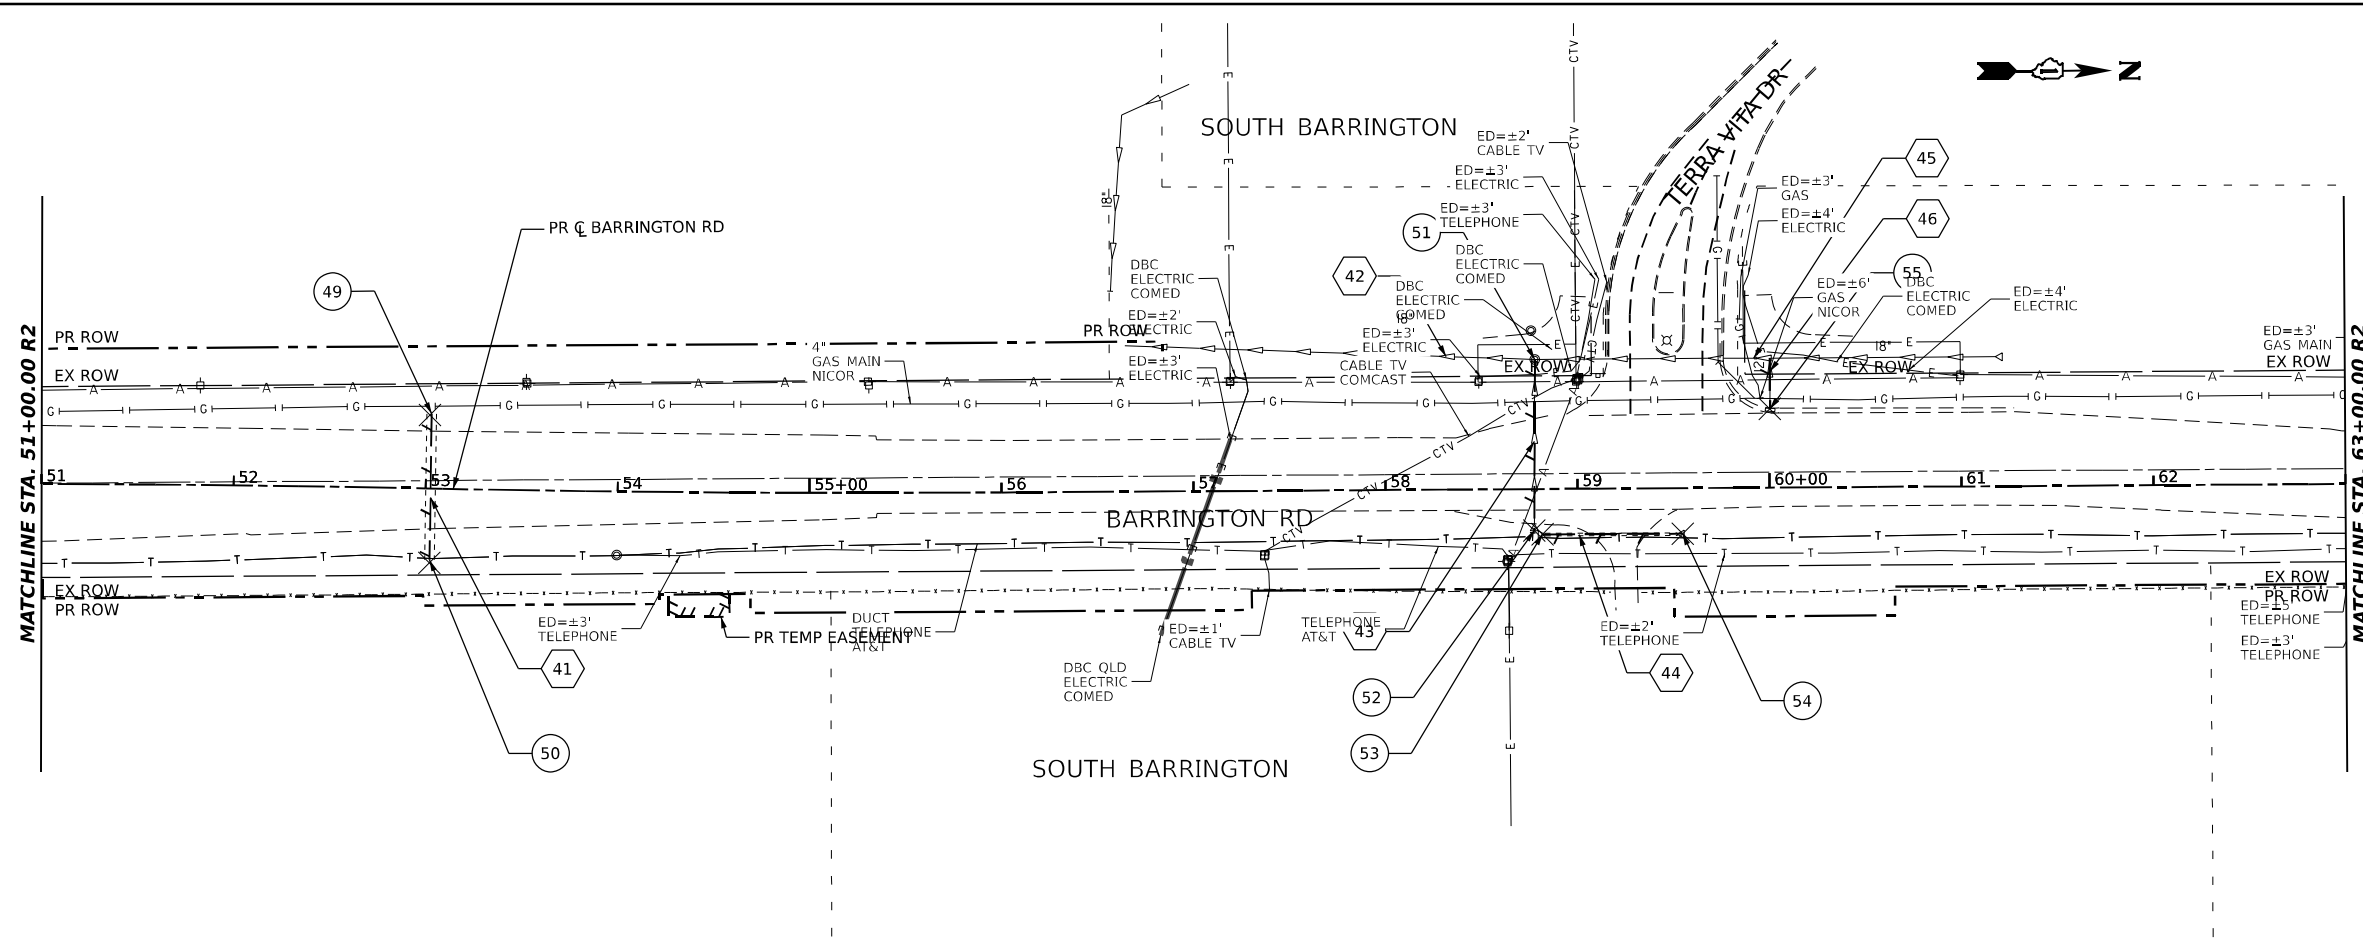

- LEGEND**
- (X) PIPE NUMBER
 - (X) STRUCTURE NUMBER
 - (A) STRUCTURE TO BE ADJUSTED
 - (C) PIPE TO BE CLEANED
 - (REC) STRUCTURE TO BE RECONSTRUCTED
 - (X) STRUCTURE TO BE REMOVED
 - STORM SEWER REMOVAL AND PIPE CULVERT REMOVAL

MODEL: Plan 5 (Sheet)
 FILE NAME: p:\projects\2020\2019-161-W\Drawings\2020\2019-161-W\20200118\CAD\02_Sheet\01-Drain\Rem\012K33-SHT-Drainage_Removal.dgn






USER NAME = MatthewToussaint	DESIGNED - MRH	REVISED -
	DRAWN - MRH	REVISED -
PLOT SCALE = 0.16666633 1/ in.	CHECKED - CMW	REVISED -
PLOT DATE = 2/3/2026	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

DRAINAGE REMOVAL PLAN

SCALE: 1:50 SHEET 3 OF 5 SHEETS STA. 51+00.00 TO STA. 75+00.00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	175
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

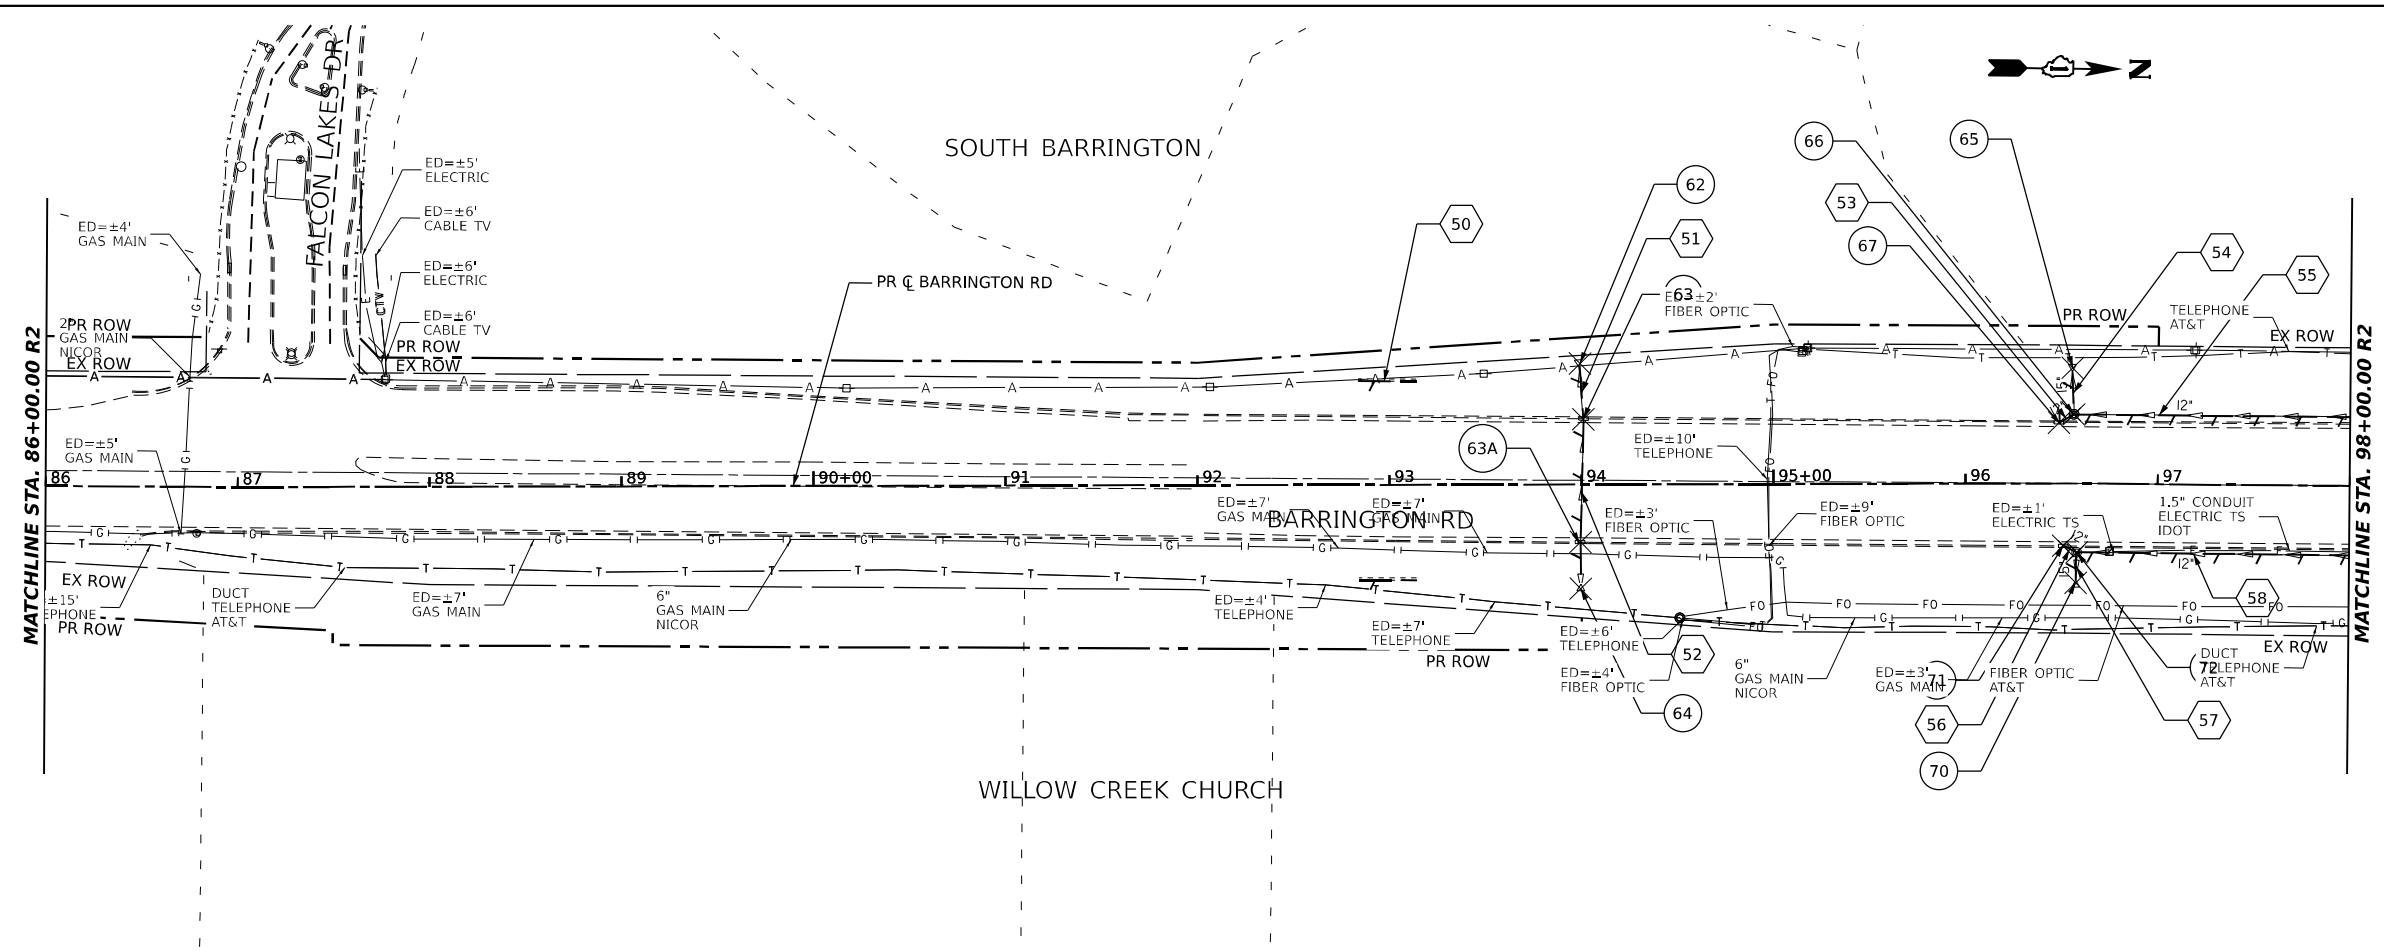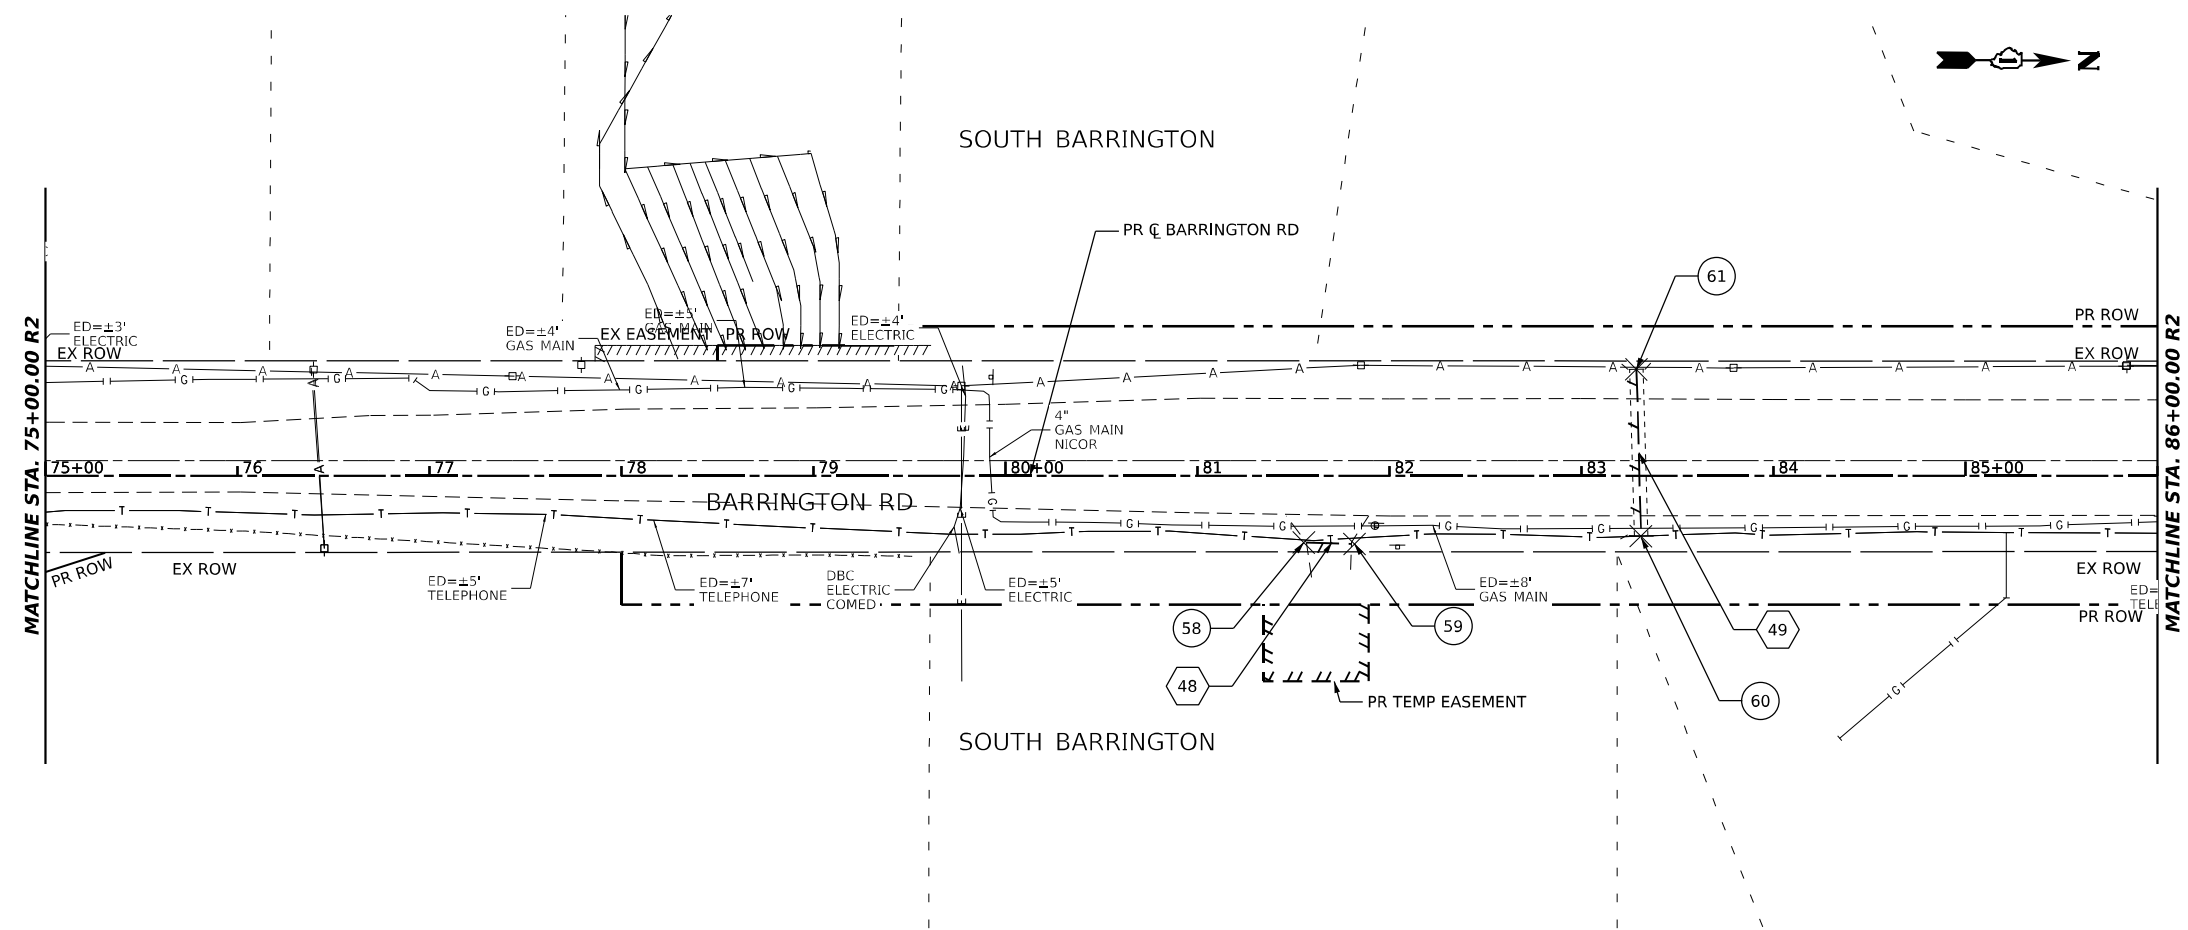

LEGEND

- (X) PIPE NUMBER
- (X) STRUCTURE NUMBER
- (A) STRUCTURE TO BE ADJUSTED
- (C) PIPE TO BE CLEANED
- (REC) STRUCTURE TO BE RECONSTRUCTED
- (X) STRUCTURE TO BE REMOVED
- STORM SEWER REMOVAL AND PIPE CULVERT REMOVAL

MODEL: Plan 7 (Sheet)
 FILE NAME: p:\projects\point01\ae-trans\scorp.com\trans\scorp\p01\Documents\Projects_2020\CH4401\001\2001\B\CAD\02_Sheet\01-10m_Rem\01\2K33-SHT-Drainage_Removal.dgn





USER NAME = MatthewToussaint	DESIGNED - MRH	REVISED -
PLOT SCALE = 0.16666633 1/ in.	DRAWN - MRH	REVISED -
PLOT DATE = 2/3/2026	CHECKED - CMW	REVISED -
	DATE - 02/02/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

DRAINAGE REMOVAL PLAN


SCALE: 1:50 SHEET 4 OF 5 SHEETS STA. 75+00.00 TO STA. 98+00.00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	176
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

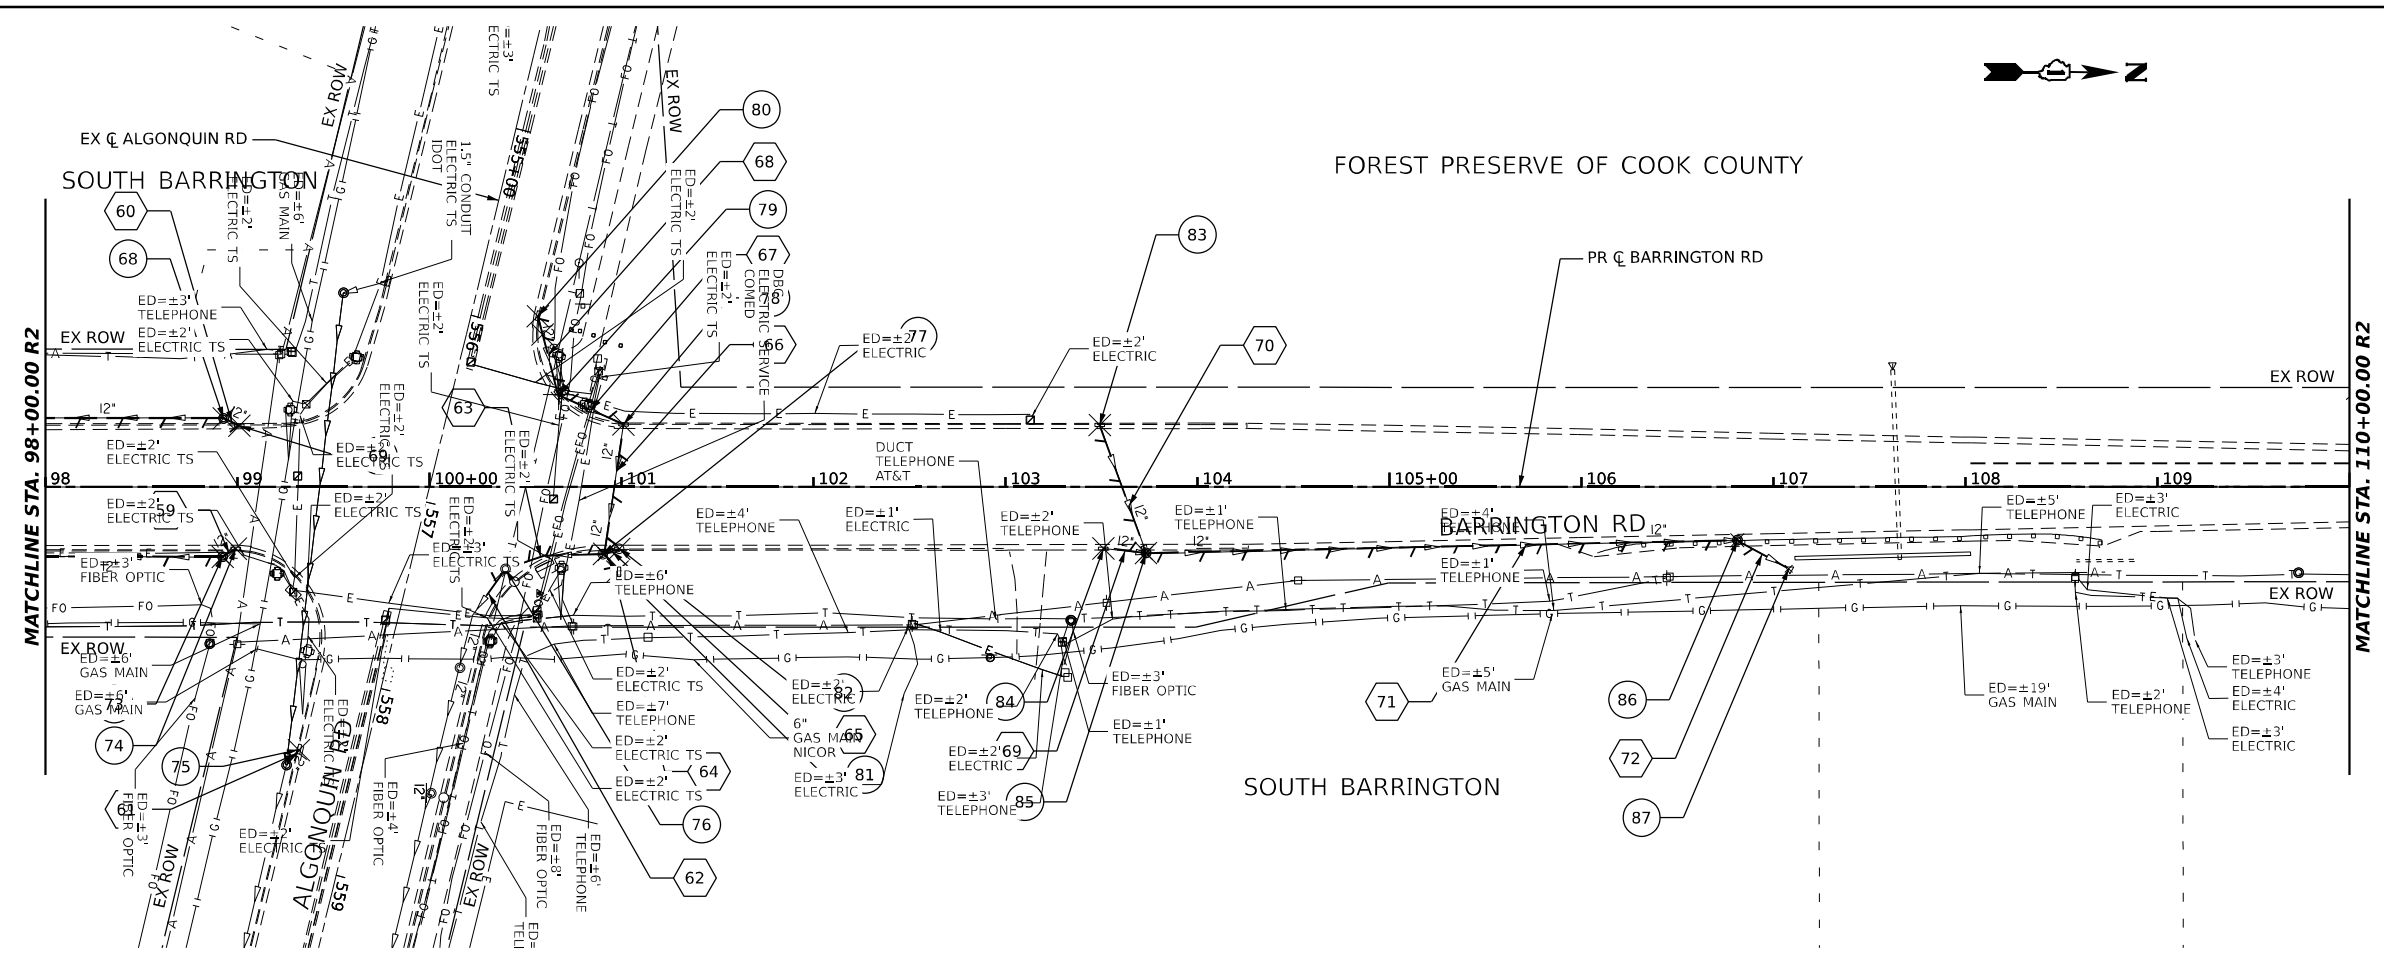

LEGEND

- X PIPE NUMBER
- X STRUCTURE NUMBER
- A STRUCTURE TO BE ADJUSTED
- C PIPE TO BE CLEANED
- REC STRUCTURE TO BE RECONSTRUCTED
- X STRUCTURE TO BE REMOVED
- STORM SEWER REMOVAL AND PIPE CULVERT REMOVAL

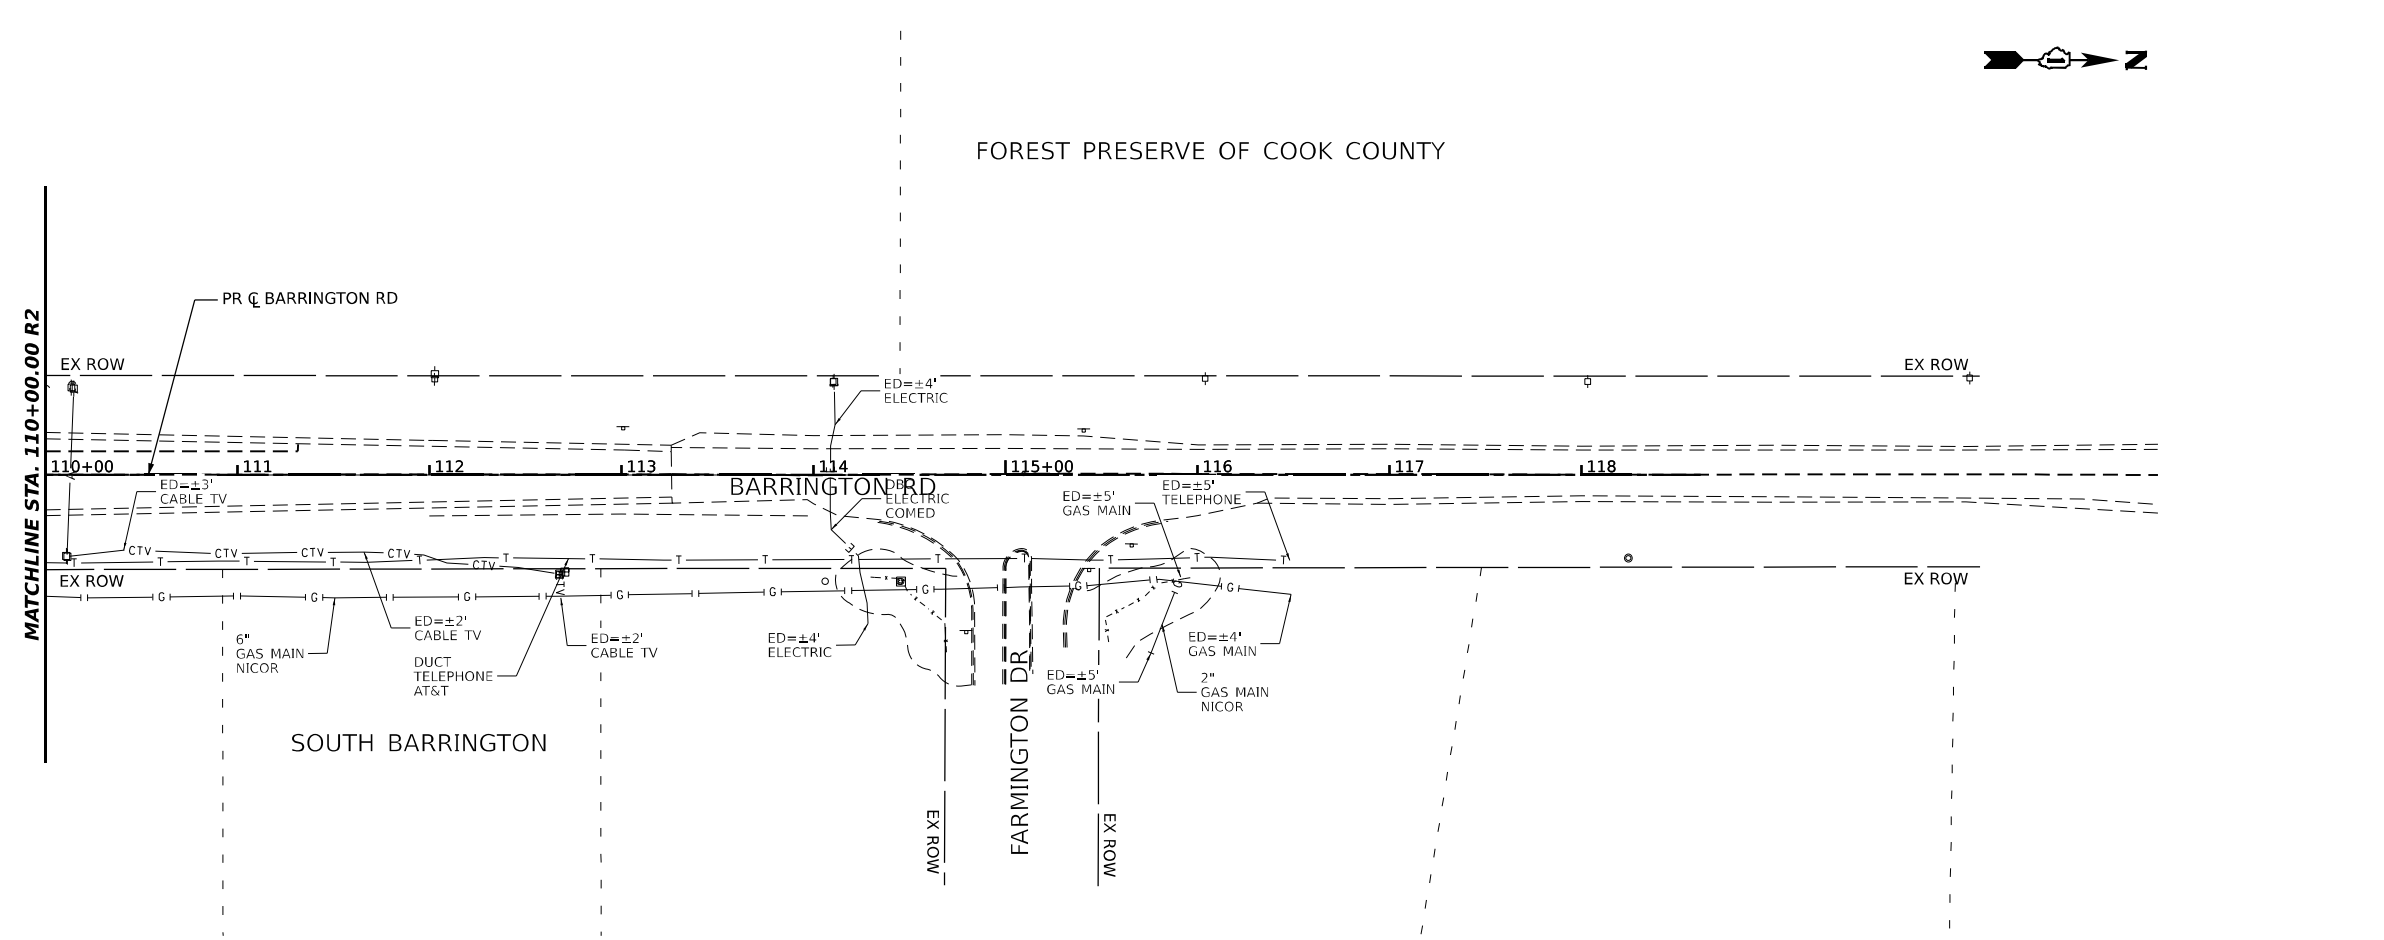

MODEL: Plan 0 (Sheet)
 FILE NAME: p:\projects\2019\2019-161-W\Documents\Projects_2020\CAD\401.101.20018\CAD\02_Sheet\01-Dm Rem\01\K33-SHT-Drainage Removal.dgn



USER NAME	= MatthewToussaint	DESIGNED	- MRH	REVISED	-
DRAWN	- MRH	REVISIONS	-	REVISIONS	-
PLOT SCALE	= 0.16666633 1/16"	CHECKED	- CMW	REVISIONS	-
PLOT DATE	= 2/3/2026	DATE	- 02/02/2026	REVISIONS	-



**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

DRAINAGE REMOVAL PLAN

SCALE: 1:50 SHEET 5 OF 5 SHEETS STA. 98+00.00 TO STA. 118+00.00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	177
				CONTRACT NO. 62K33
ILLINOIS FED. AID PROJECT				

SOUTH BARRINGTON

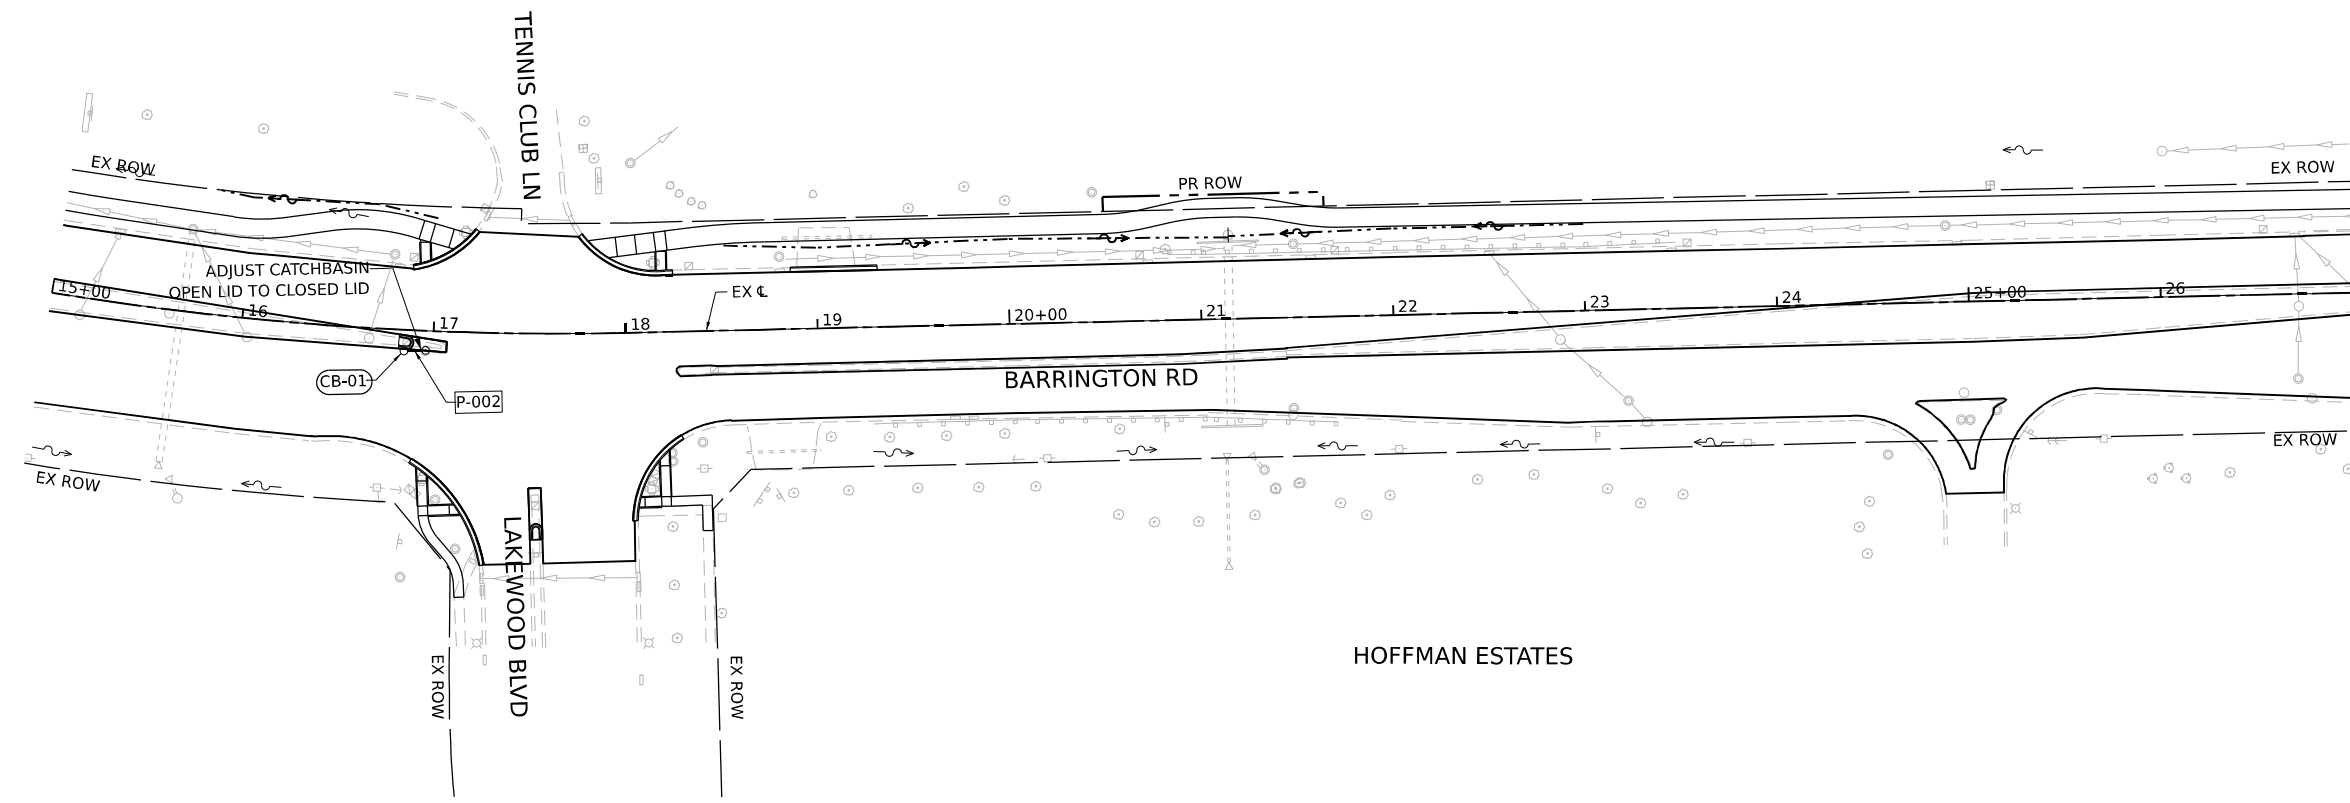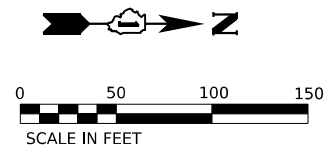

DRAINAGE LEGEND

- P-### PROPOSED STORM SEWER PIPE LABEL
- S-### PROPOSED DRAINAGE STRUCTURE LABEL
- UD-### PROPOSED PIPE UNDERDRAIN LABEL
- EXISTING SWALE
- EXISTING DITCH FLOW
- PROPOSED DITCH FLOW
- PROPOSED SUMMIT
- EXISTING SEWER
- PROPOSED SEWER
- EXISTING CULVERT
- PROPOSED PIPE CULVERT
- PROPOSED UNDERDRAIN
- EXISTING DRAINAGE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED MANHOLE
- PROPOSED END SECTION / FLARED END SECTION
- PERMANENT DITCH CHECK

NOTES

1. ROADWAY AND DITCH PROFILES ARE SHOWN ON THE DRAINAGE PLAN & PROFILE SHEET NO. #9.

MODEL: PR_BARR_11.dwg, Plot: 21/01/2026 10:01:00, Plot Scale: 0.166666666666667, Plot Date: 01/21/2026, File Name: C:\Users\aduran\OneDrive\Documents\Projects_2020\CAD\02_Sheet12-Dm_Plan_Profile\02K33-SHT-DrainPlan_Profile_V3.dwg





USER NAME = vpelegrimas	DESIGNED - TSHINEZORIG	REVISED -
PLOT SCALE = 0.166666666666667 in.	DRAWN - ADURAN	REVISED -
PLOT DATE =	CHECKED - VPELEGRIMAS	REVISED -
	DATE - 01/21/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BARRINGTON ROAD
DRAINAGE PLAN AND PROFILE**


SCALE: 1" = 50' SHEET 1 OF 13 SHEETS STA. 15+00 TO STA. 27+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 178
ILLINOIS FED. AID PROJECT			CONTRACT NO. 62K33	

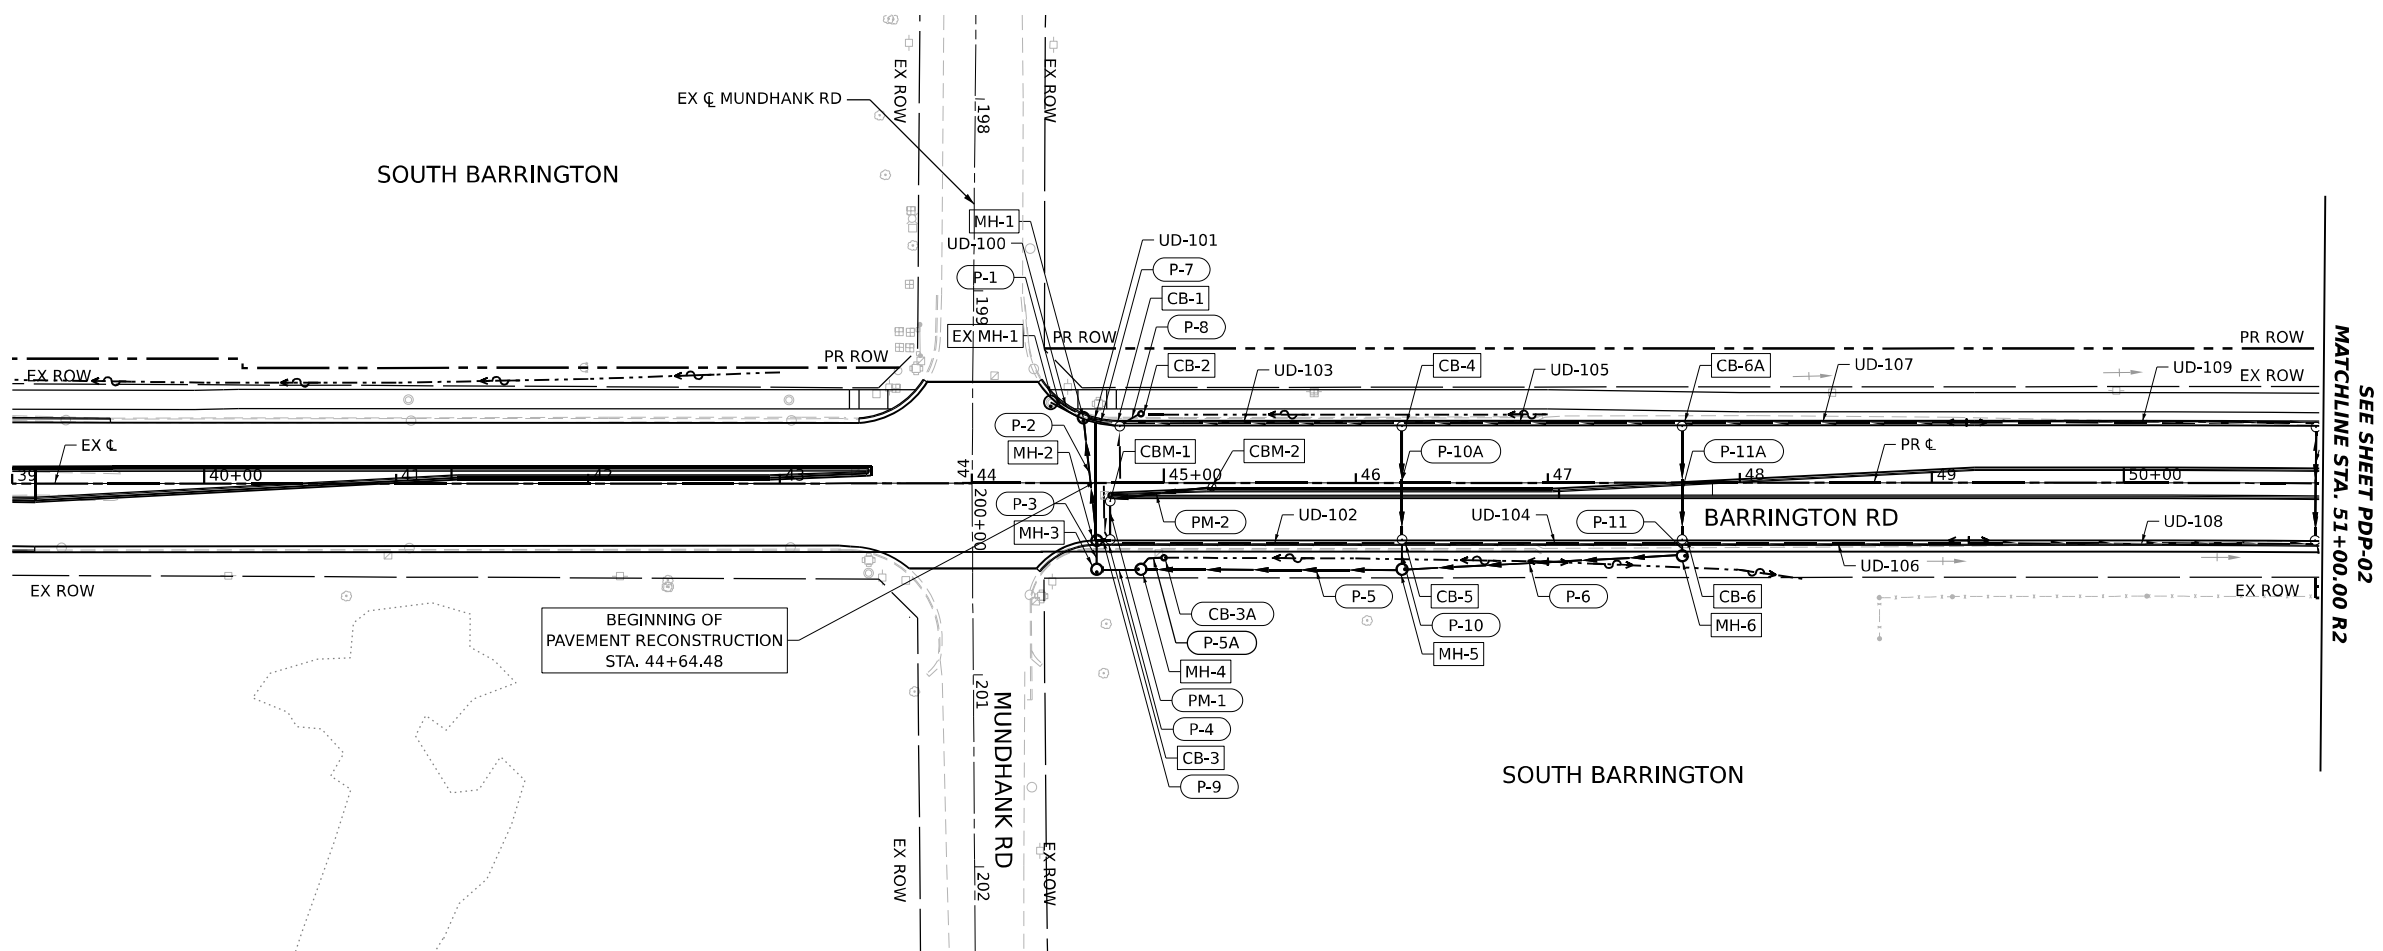

DRAINAGE LEGEND

- PROPOSED STORM SEWER PIPE LABEL
- PROPOSED DRAINAGE STRUCTURE LABEL
- PROPOSED PIPE UNDERDRAIN LABEL
- EXISTING SWALE
- EXISTING DITCH FLOW
- PROPOSED DITCH FLOW
- PROPOSED SUMMIT
- EXISTING SEWER
- PROPOSED SEWER
- EXISTING CULVERT
- PROPOSED PIPE CULVERT
- PROPOSED UNDERDRAIN
- EXISTING DRAINAGE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED MANHOLE
- PROPOSED END SECTION / FLARED END SECTION
- PERMANENT DITCH CHECK

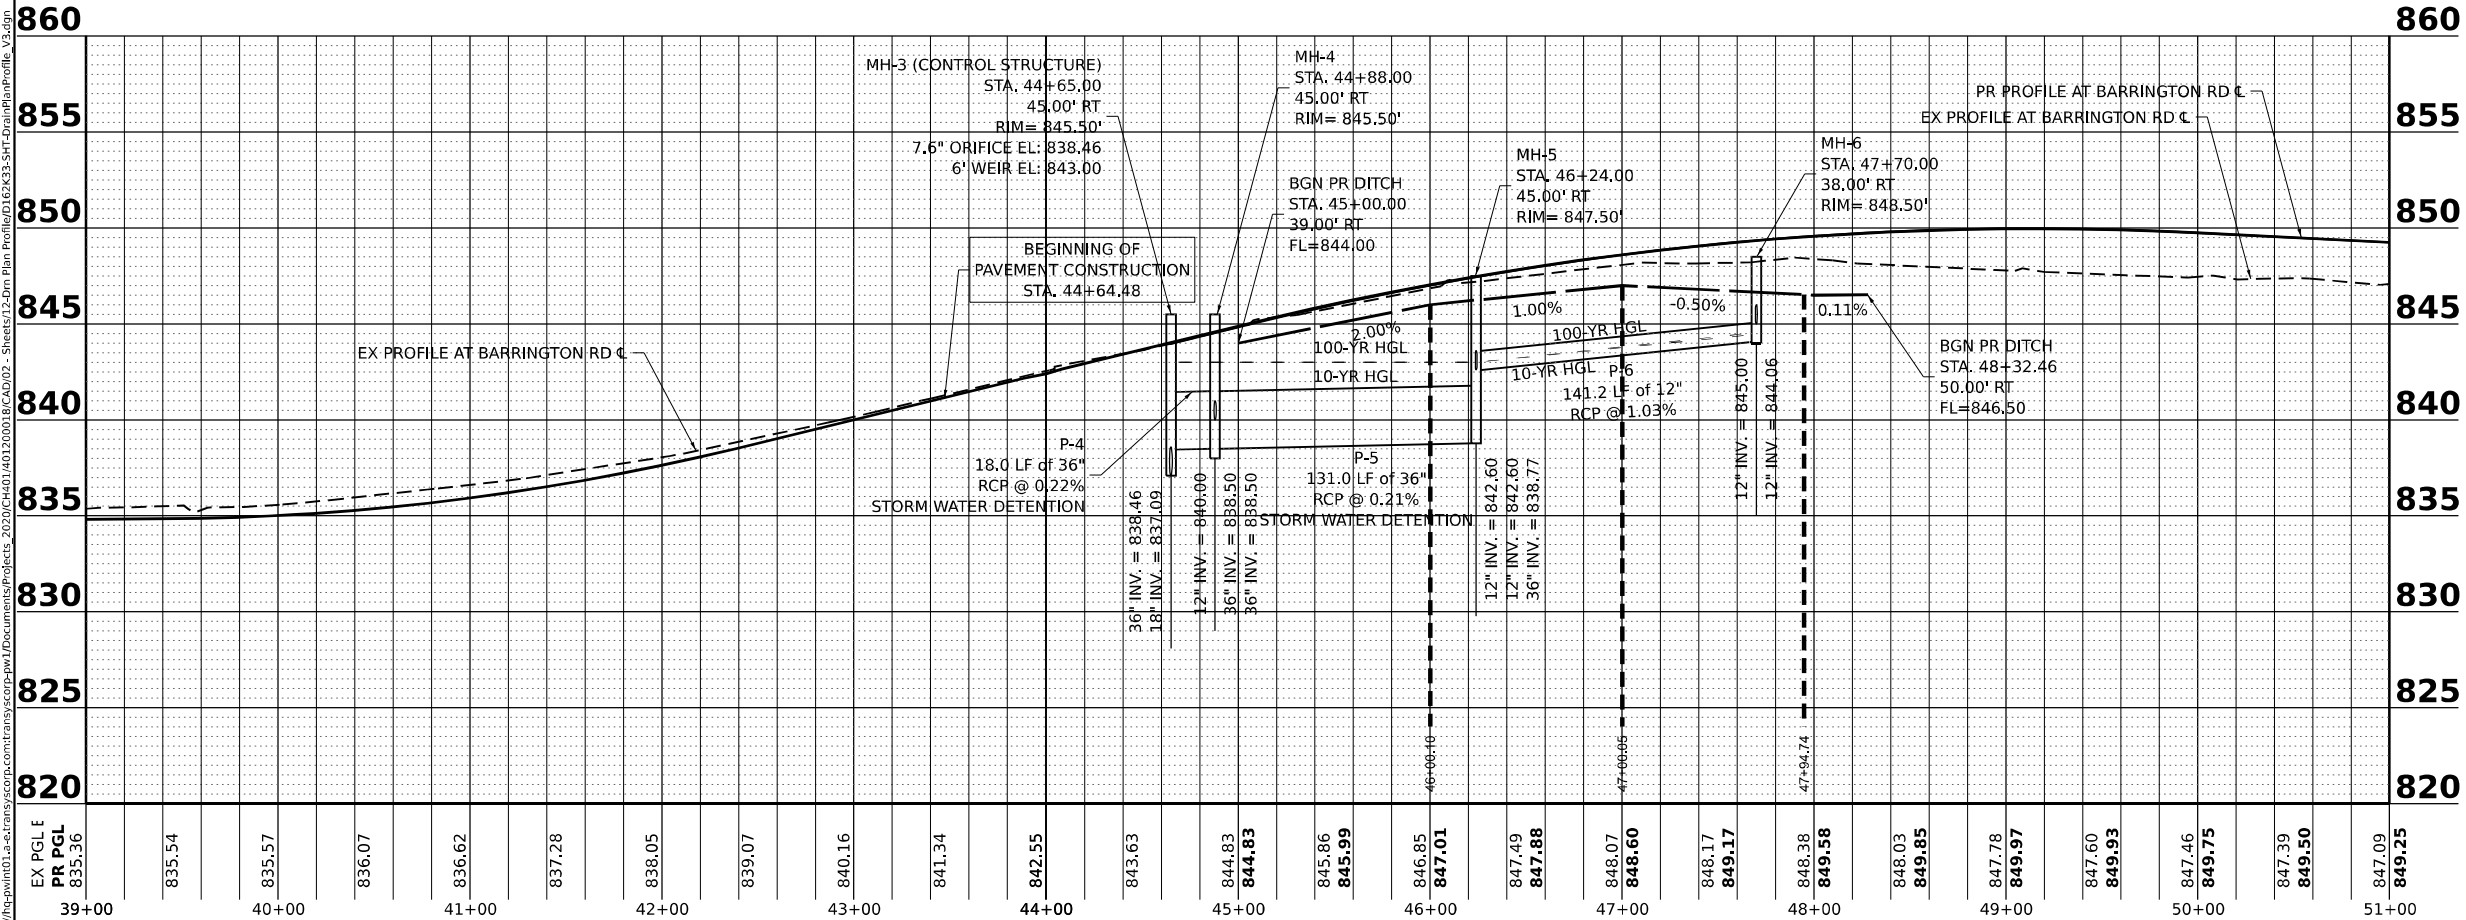

MOC: \\PR_BAS_Rin_4 (Sheet) FILE NAME: \\pr\pdm\2019-161-w\trans\scop\p1\Documents\Projects_2020\CAD\01\001\20200118\CAD\02_Sheet\02.Dwg Plan Profile\01EX33-SHT-DrainPlanProfile_V2.dwg



USER NAME = vpelegrimas	DESIGNED - TSHINEZORIG	REVISED -
DRAWN - ADURAN	REVISIONS -	
PLOT SCALE = 0.16666685 1/ in.	CHECKED - VPELEGRIMAS	REVISIONS -
PLOT DATE = 1/13/2026	DATE - 01/21/2026	REVISIONS -

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION



BARRINGTON ROAD DRAINAGE PLAN AND PROFILE	
SCALE: 1"=50'	SHEET 2 OF 13 SHEETS
STA. 39+00	TO STA. 51+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	179
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

SOUTH BARRINGTON


TERRA VITA DR

SOUTH BARRINGTON

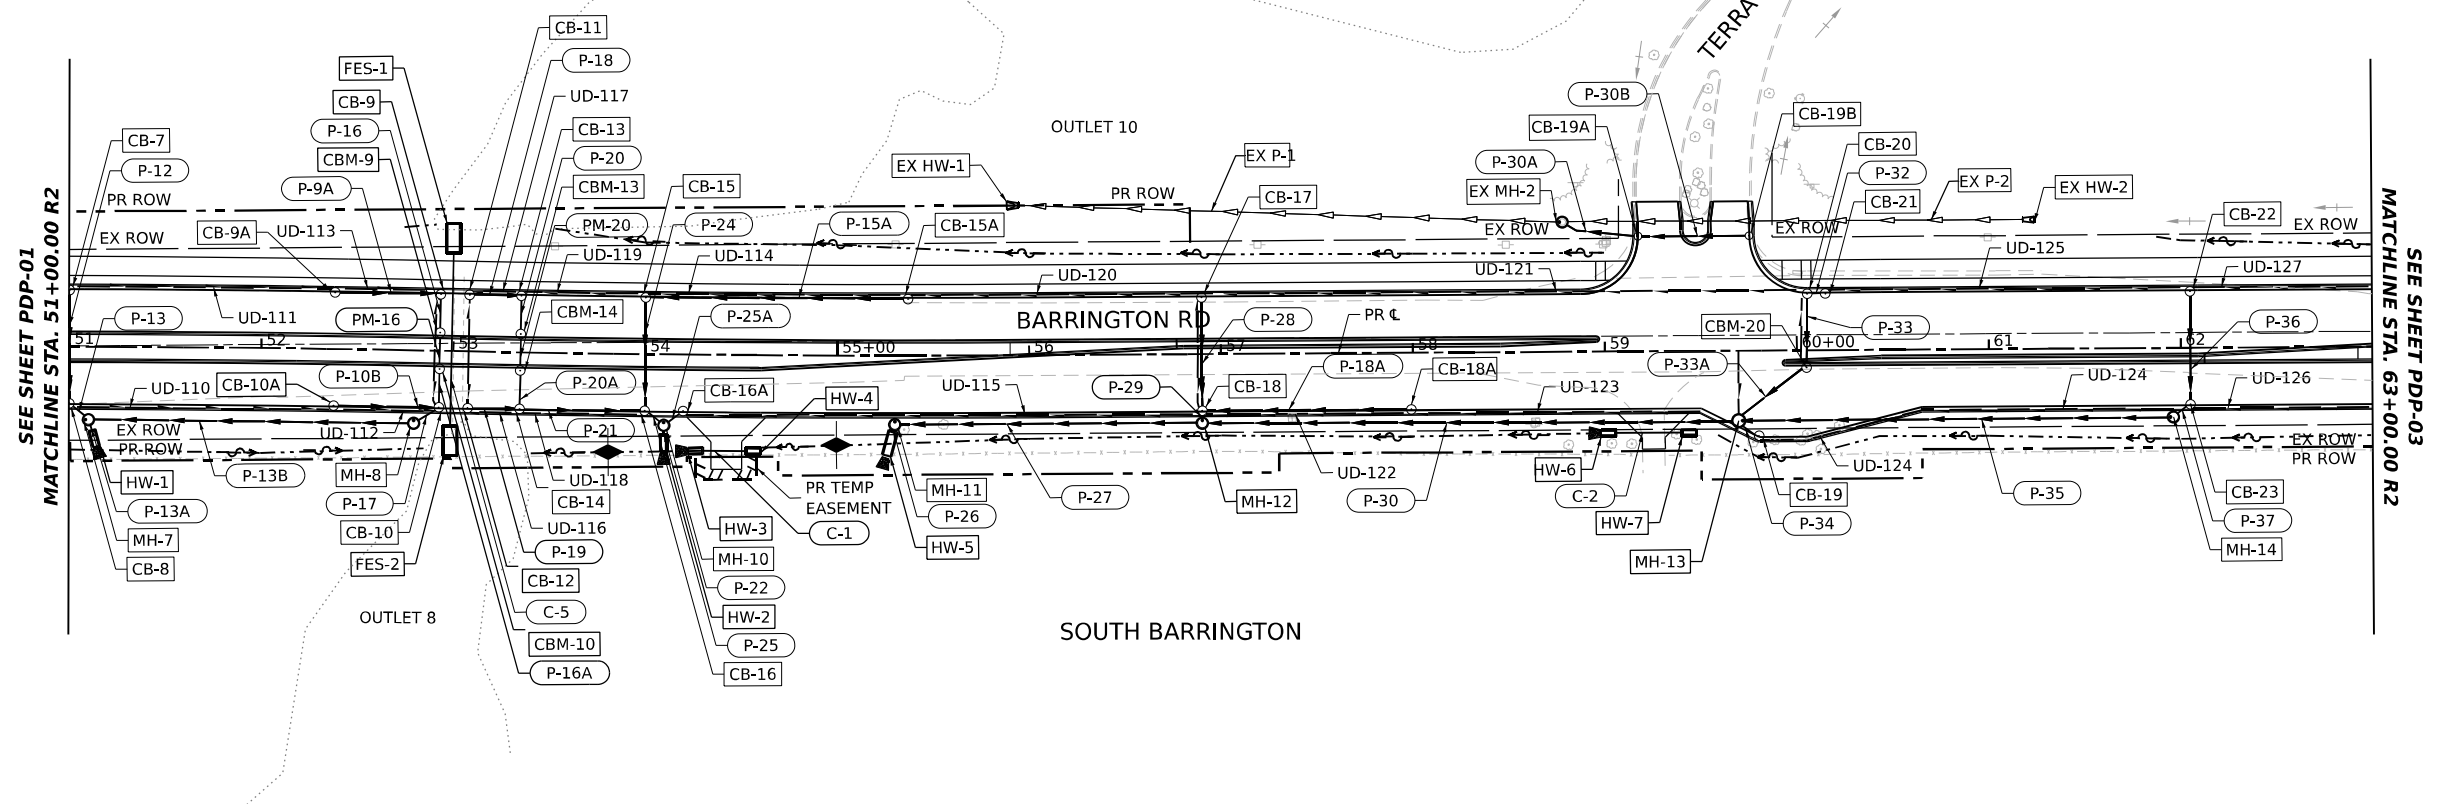

DRAINAGE LEGEND

- PROPOSED STORM SEWER PIPE LABEL
- PROPOSED DRAINAGE STRUCTURE LABEL
- PROPOSED PIPE UNDERDRAIN LABEL
- EXISTING SWALE
- EXISTING DITCH FLOW
- PROPOSED DITCH FLOW
- PROPOSED SUMMIT
- EXISTING SEWER
- PROPOSED SEWER
- EXISTING CULVERT
- PROPOSED PIPE CULVERT
- PROPOSED UNDERDRAIN
- EXISTING DRAINAGE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED MANHOLE
- PROPOSED END SECTION / FLARED END SECTION
- PERMANENT DITCH CHECK

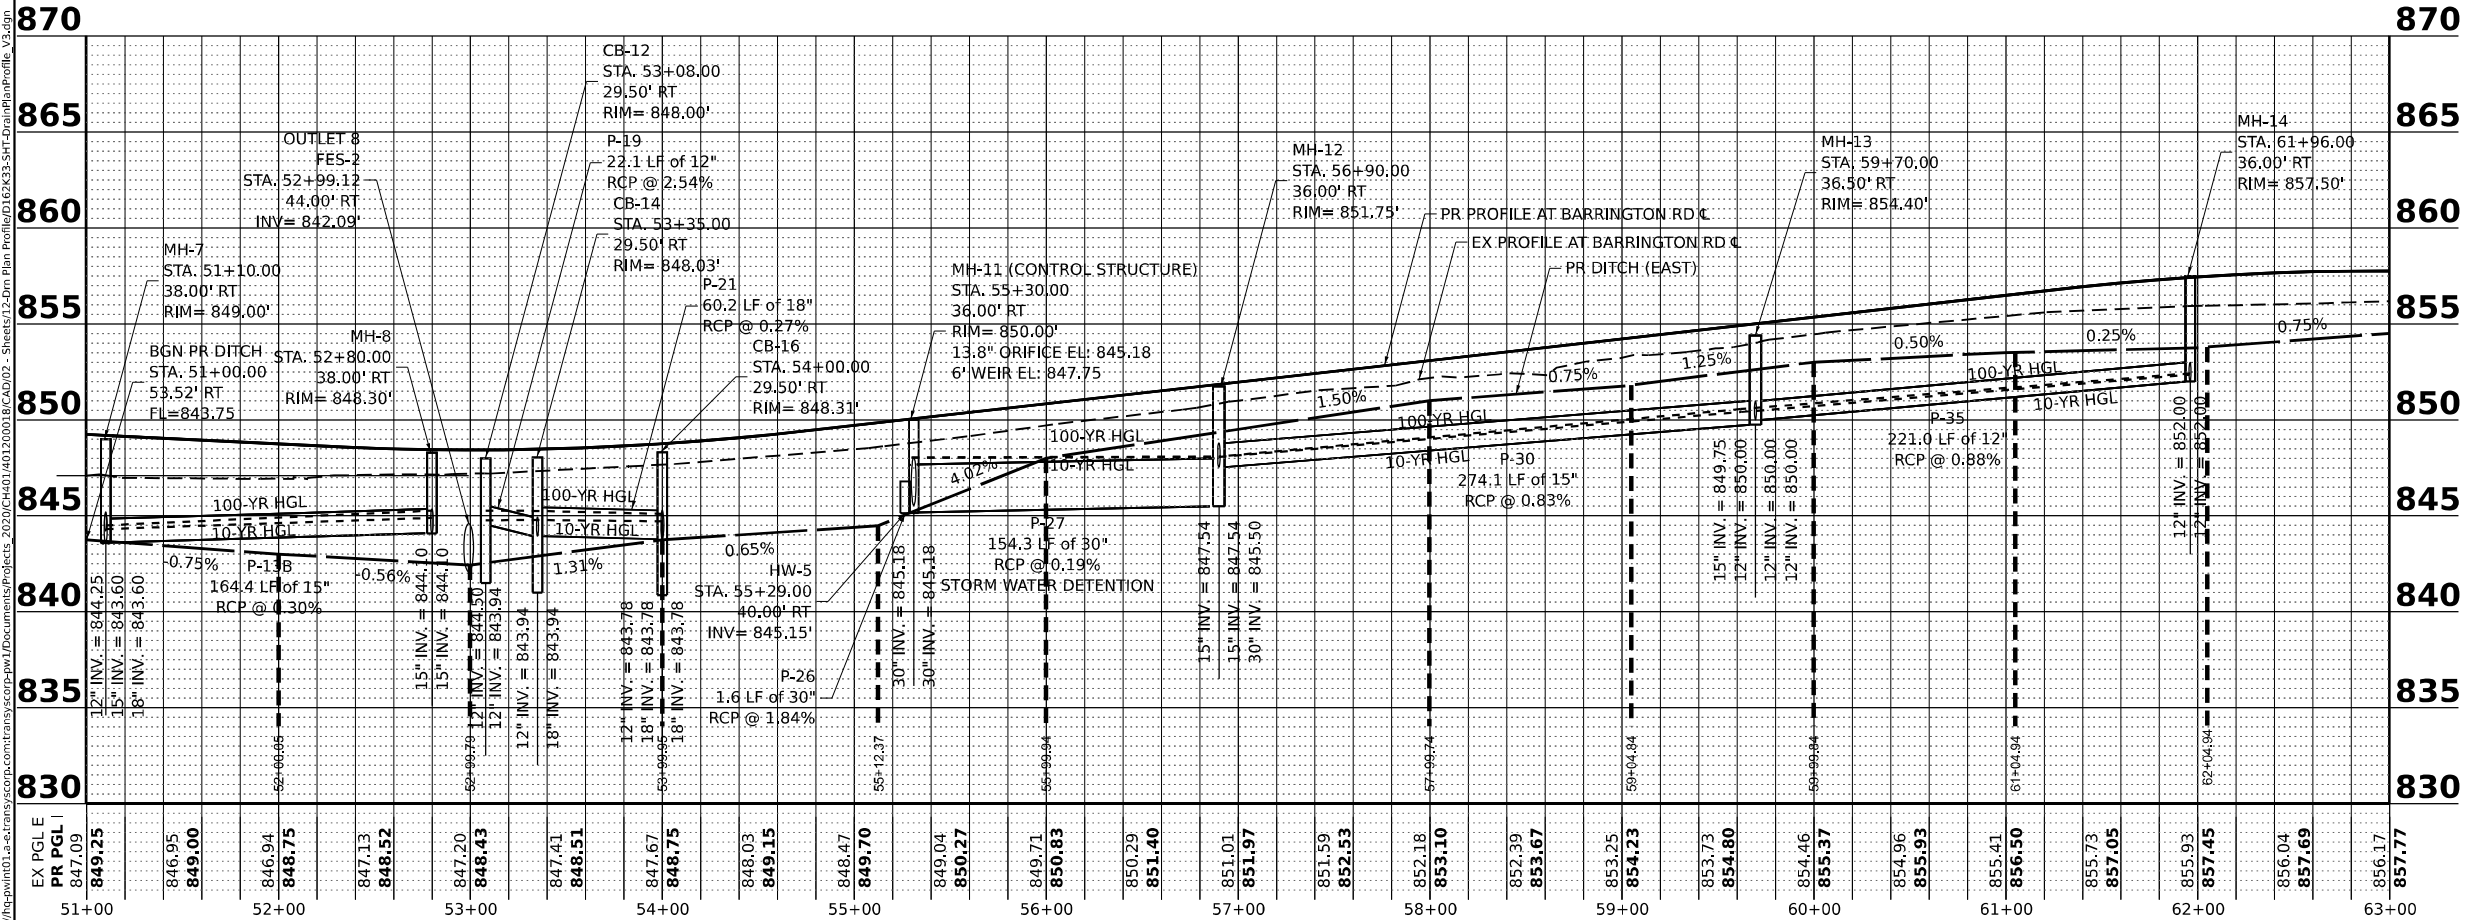

MODEL: PR_BARR_R15 (Sheet) FILE NAME: P:\projects\2019-161-W\Servers\prp\1\Documents\Projects_2020\CAD\01\001200018\CAD\02_Sheet\02.Dwg Plan Profile\01EX33-SHT-DrainPlanProfile_V2.dwg





USER NAME = vpelegrimas	DESIGNED - TSHINEZORIG	REVISED -
PLOT SCALE = 0.16666685"/in.	DRAWN - ADURAN	REVISED -
PLOT DATE = 1/13/2026	CHECKED - VPELEGRIMAS	REVISED -
	DATE - 01/21/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


**BARRINGTON ROAD
DRAINAGE PLAN AND PROFILE**

SCALE: 1"=50' SHEET 3 OF 13 SHEETS STA. 51+00 TO STA. 63+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 180
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

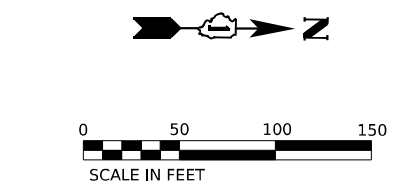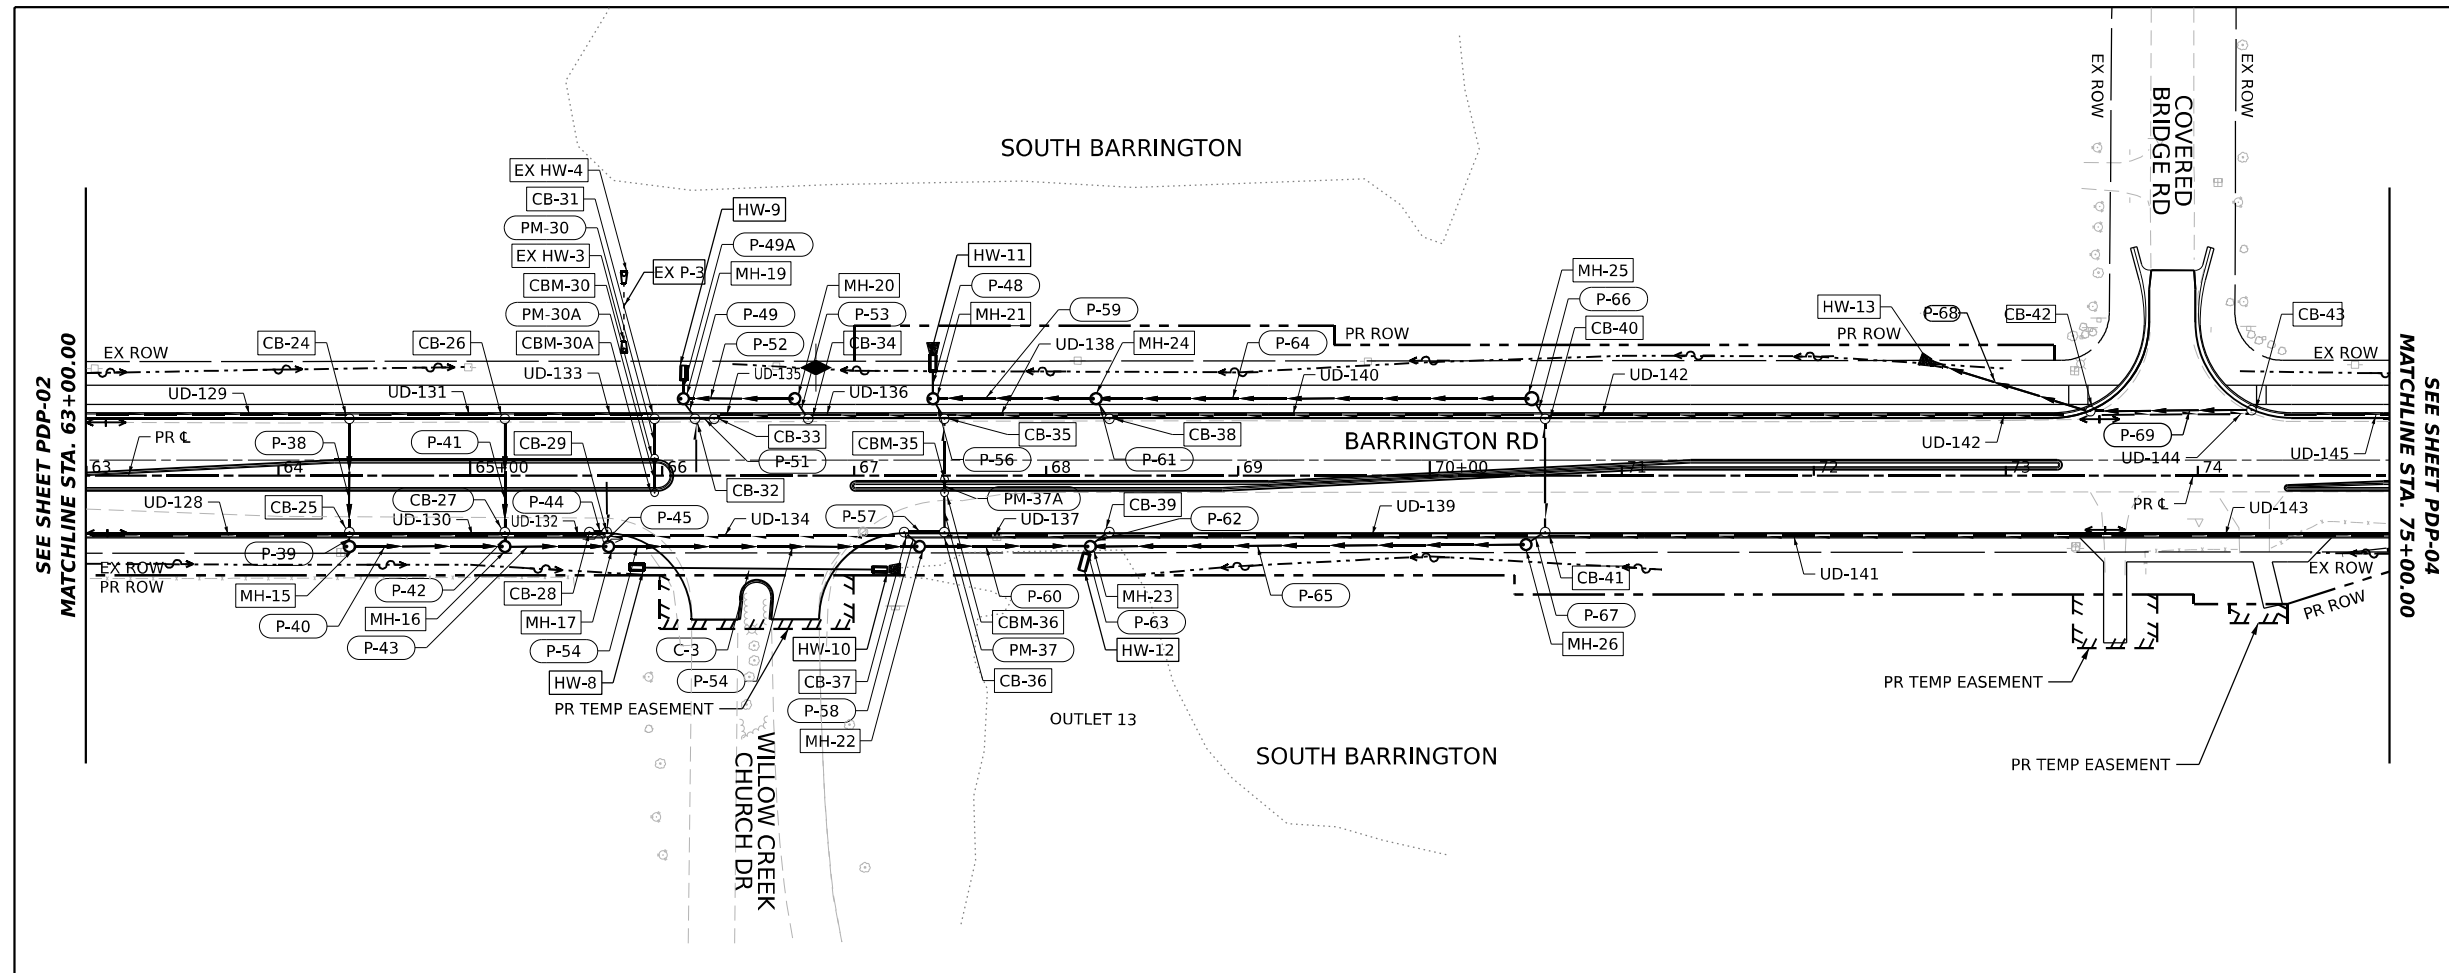

- ### DRAINAGE LEGEND
- P-### PROPOSED STORM SEWER PIPE LABEL
 - S-### PROPOSED DRAINAGE STRUCTURE LABEL
 - UD-### PROPOSED PIPE UNDERDRAIN LABEL
 - EXISTING SWALE
 - EXISTING DITCH FLOW
 - PROPOSED DITCH FLOW
 - PROPOSED SUMMIT
 - EXISTING SEWER
 - PROPOSED SEWER
 - EXISTING CULVERT
 - PROPOSED PIPE CULVERT
 - PROPOSED UNDERDRAIN
 - EXISTING DRAINAGE STRUCTURE
 - PROPOSED CATCHBASIN
 - PROPOSED MANHOLE
 - PROPOSED END SECTION / FLARED END SECTION
 - PERMANENT DITCH CHECK

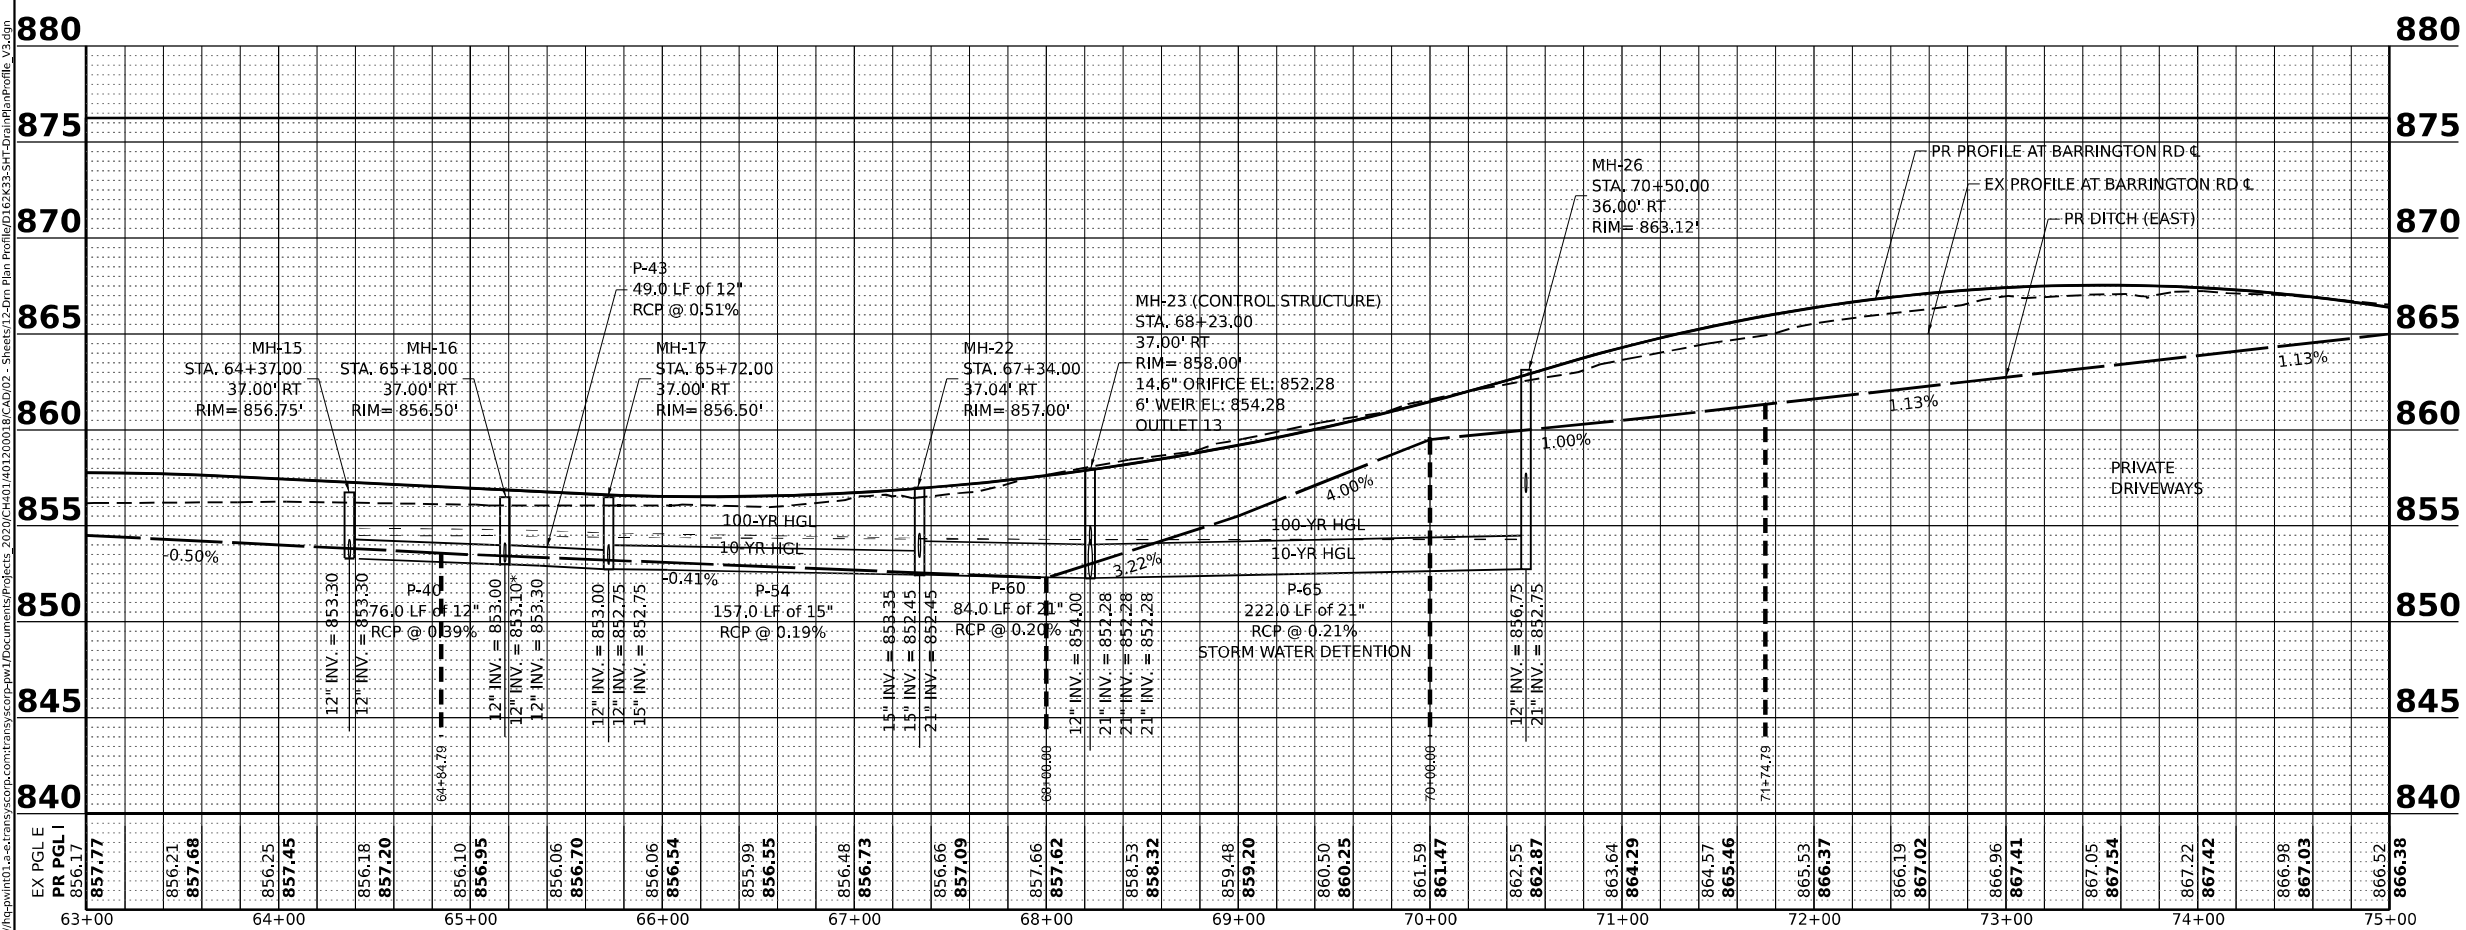

EX PGL E PR PGL I	856.17 857.77	856.21 857.68	856.25 857.45	856.18 857.20	856.10 856.95	856.06 856.70	856.06 856.54	855.99 856.55	856.48 856.73	856.66 857.09	857.66 857.62	858.53 858.32	859.48 859.20	860.50 860.25	861.59 861.47	862.55 862.87	863.64 864.29	864.57 865.46	865.53 866.37	866.19 867.02	866.96 867.41	867.05 867.54	867.22 867.42	866.98 867.03	866.52 866.38
63+00	64+00	65+00	66+00	67+00	68+00	69+00	70+00	71+00	72+00	73+00	74+00	75+00													

MODEL: PR_BARR_Ran 6 (Sheet)
 FILE NAME: P:\Projects\2019-161-W\Servers\corporate\paw1\Documents\Projects_2019\CH01\01012001\BARR_02_Sheet02.dwg
 Project: 2019-161-W\Servers\corporate\paw1\Documents\Projects_2019\CH01\01012001\BARR_02_Sheet02.dwg
 User: vpelegrimas





USER NAME = vpelegrimas	DESIGNED - TSHINEZORIG	REVISED -
PLOT SCALE = 0.16666685"/in.	DRAWN - ADURAN	REVISED -
PLOT DATE = 1/13/2026	CHECKED - VPELEGRIMAS	REVISED -
	DATE - 01/21/2026	REVISED -


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BARRINGTON ROAD	
DRAINAGE PLAN AND PROFILE	
SCALE: 1"=50'	TO STA. 75+00
SHEET 4	OF 13 SHEETS

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 181
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				


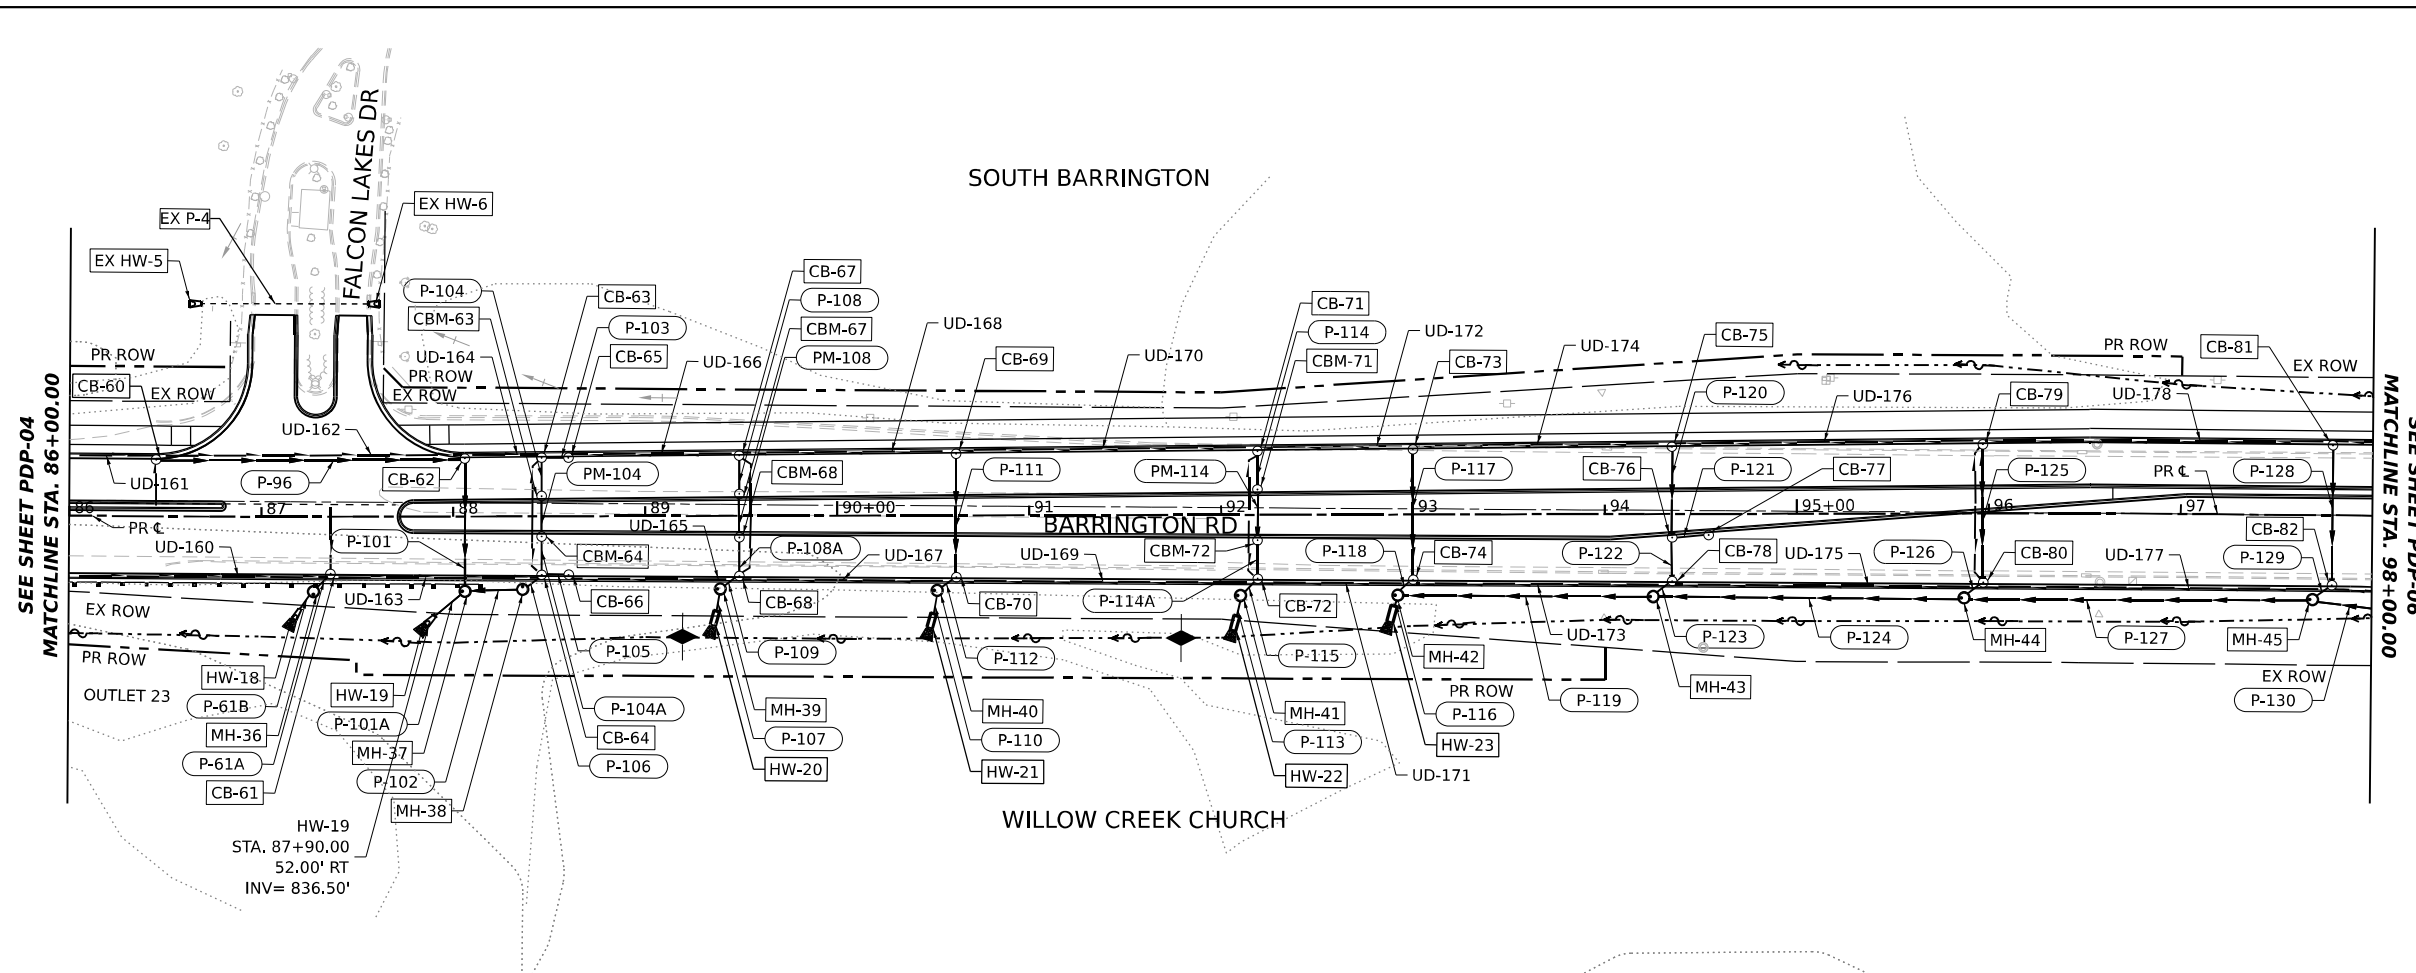
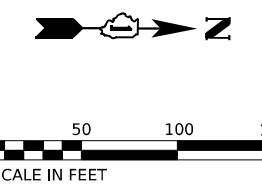


- ### DRAINAGE LEGEND
- P-### PROPOSED STORM SEWER PIPE LABEL
 - S-### PROPOSED DRAINAGE STRUCTURE LABEL
 - UD-### PROPOSED PIPE UNDERDRAIN LABEL
 - EXISTING SWALE
 - EXISTING DITCH FLOW
 - PROPOSED DITCH FLOW
 - PROPOSED SUMMIT
 - EXISTING SEWER
 - PROPOSED SEWER
 - EXISTING CULVERT
 - PROPOSED PIPE CULVERT
 - PROPOSED UNDERDRAIN
 - EXISTING DRAINAGE STRUCTURE
 - PROPOSED CATCHBASIN
 - PROPOSED MANHOLE
 - PROPOSED END SECTION / FLARED END SECTION
 - PERMANENT DITCH CHECK

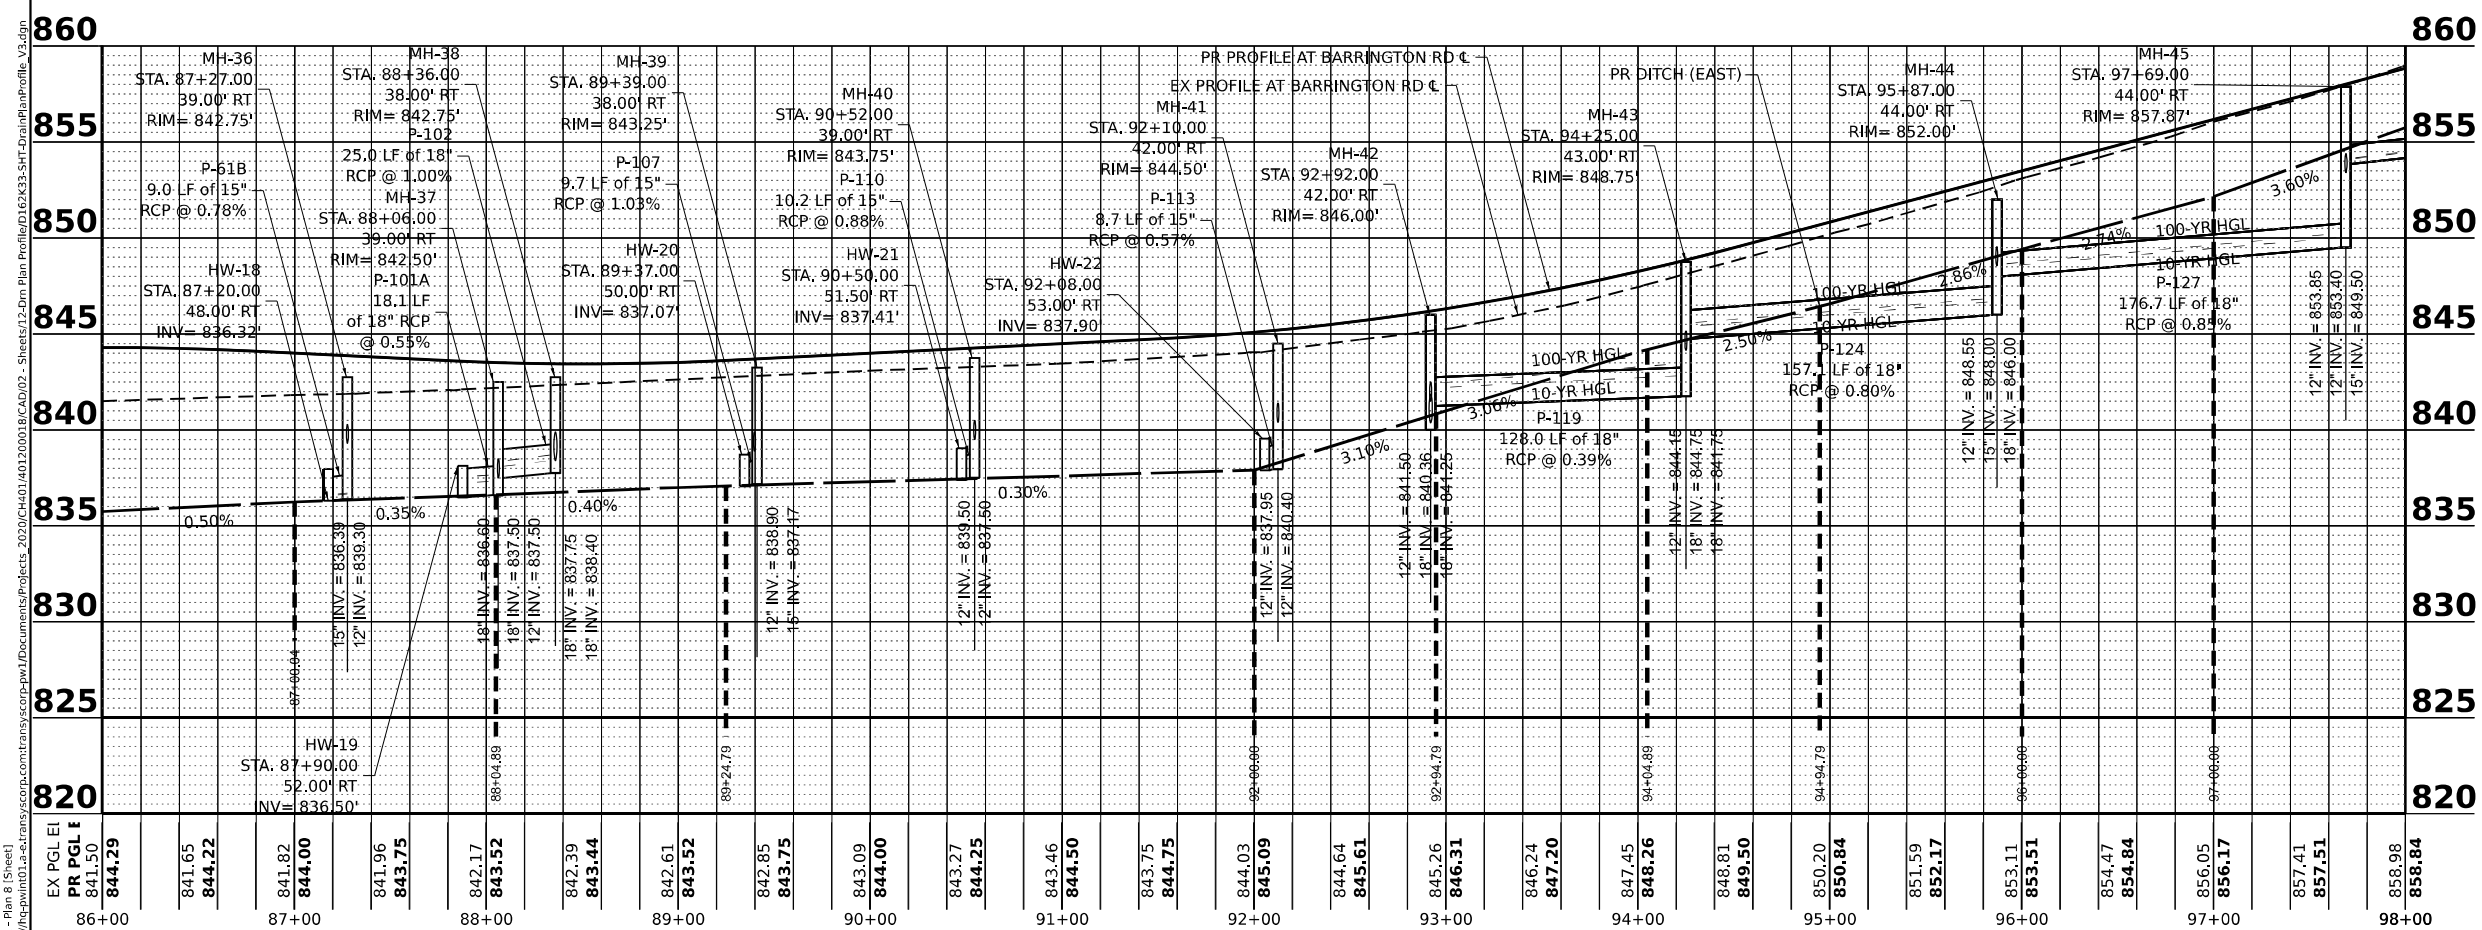


MODEL: PR_BARR - Plan 8 (Sheet)
 FILE NAME: P:\Projects\2019-161-W\Drawings\DWG\2019-161-W-DRN-01-2020\18-CAD\03_Sheet\18-CAD\03_Sheet.dwg
 PROJECT: 2019-161-W-DRN-01-2020\18-CAD\03_Sheet\18-CAD\03_Sheet.dwg
 SHEET: 18-CAD\03_Sheet\18-CAD\03_Sheet.dwg
 DATE: 01/21/2026

	USER NAME = vpelegrimas	DESIGNED - TSHINEZORIG	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BARRINGTON RD DRAINAGE PLAN AND PROFILE	F.A.P. RTE. = 362	SECTION = 2019-161-W	COUNTY = COOK	TOTAL SHEETS = 666	SHEET NO. = 183
	PLOT SCALE = 0.16666667 / in.	CHECKED - VPELEGRIMAS	REVISIED -			SCALE: 1"=50'	SHEET 6 OF 13 SHEETS	STA. 86+00	TO STA. 98+00	CONTRACT NO. 62K33
	PLOT DATE = 1/13/2026	DATE = 01/21/2026	REVISIED -							ILLINOIS FED. AID PROJECT

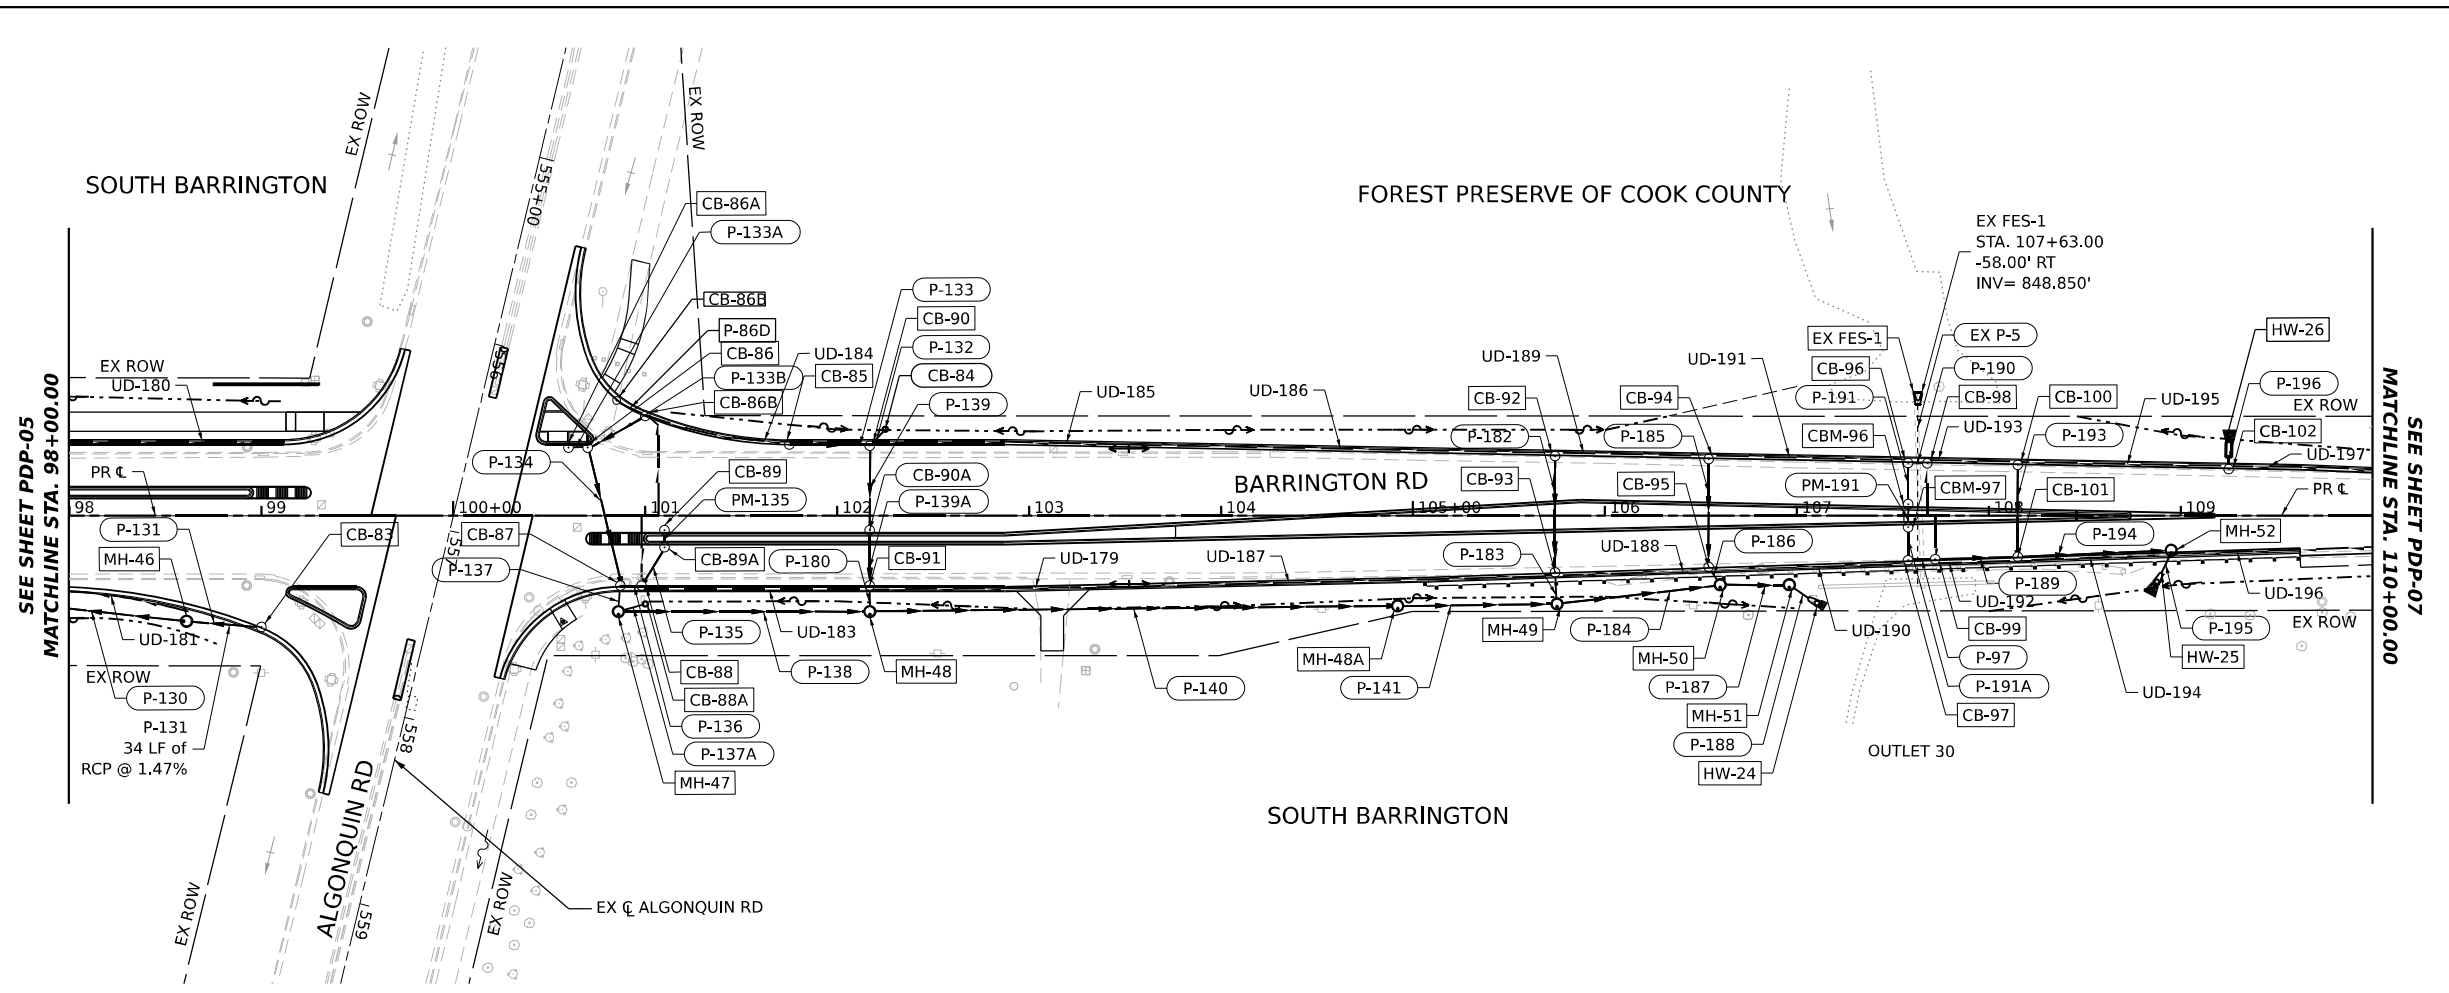

DRAINAGE LEGEND

- P-### PROPOSED STORM SEWER PIPE LABEL
- S-### PROPOSED DRAINAGE STRUCTURE LABEL
- UD-### PROPOSED PIPE UNDERDRAIN LABEL
- EXISTING SWALE
- EXISTING DITCH FLOW
- PROPOSED DITCH FLOW
- PROPOSED SUMMIT
- EXISTING SEWER
- PROPOSED SEWER
- EXISTING CULVERT
- PROPOSED PIPE CULVERT
- PROPOSED UNDERDRAIN
- EXISTING DRAINAGE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED MANHOLE
- PROPOSED END SECTION / FLARED END SECTION
- PERMANENT DITCH CHECK

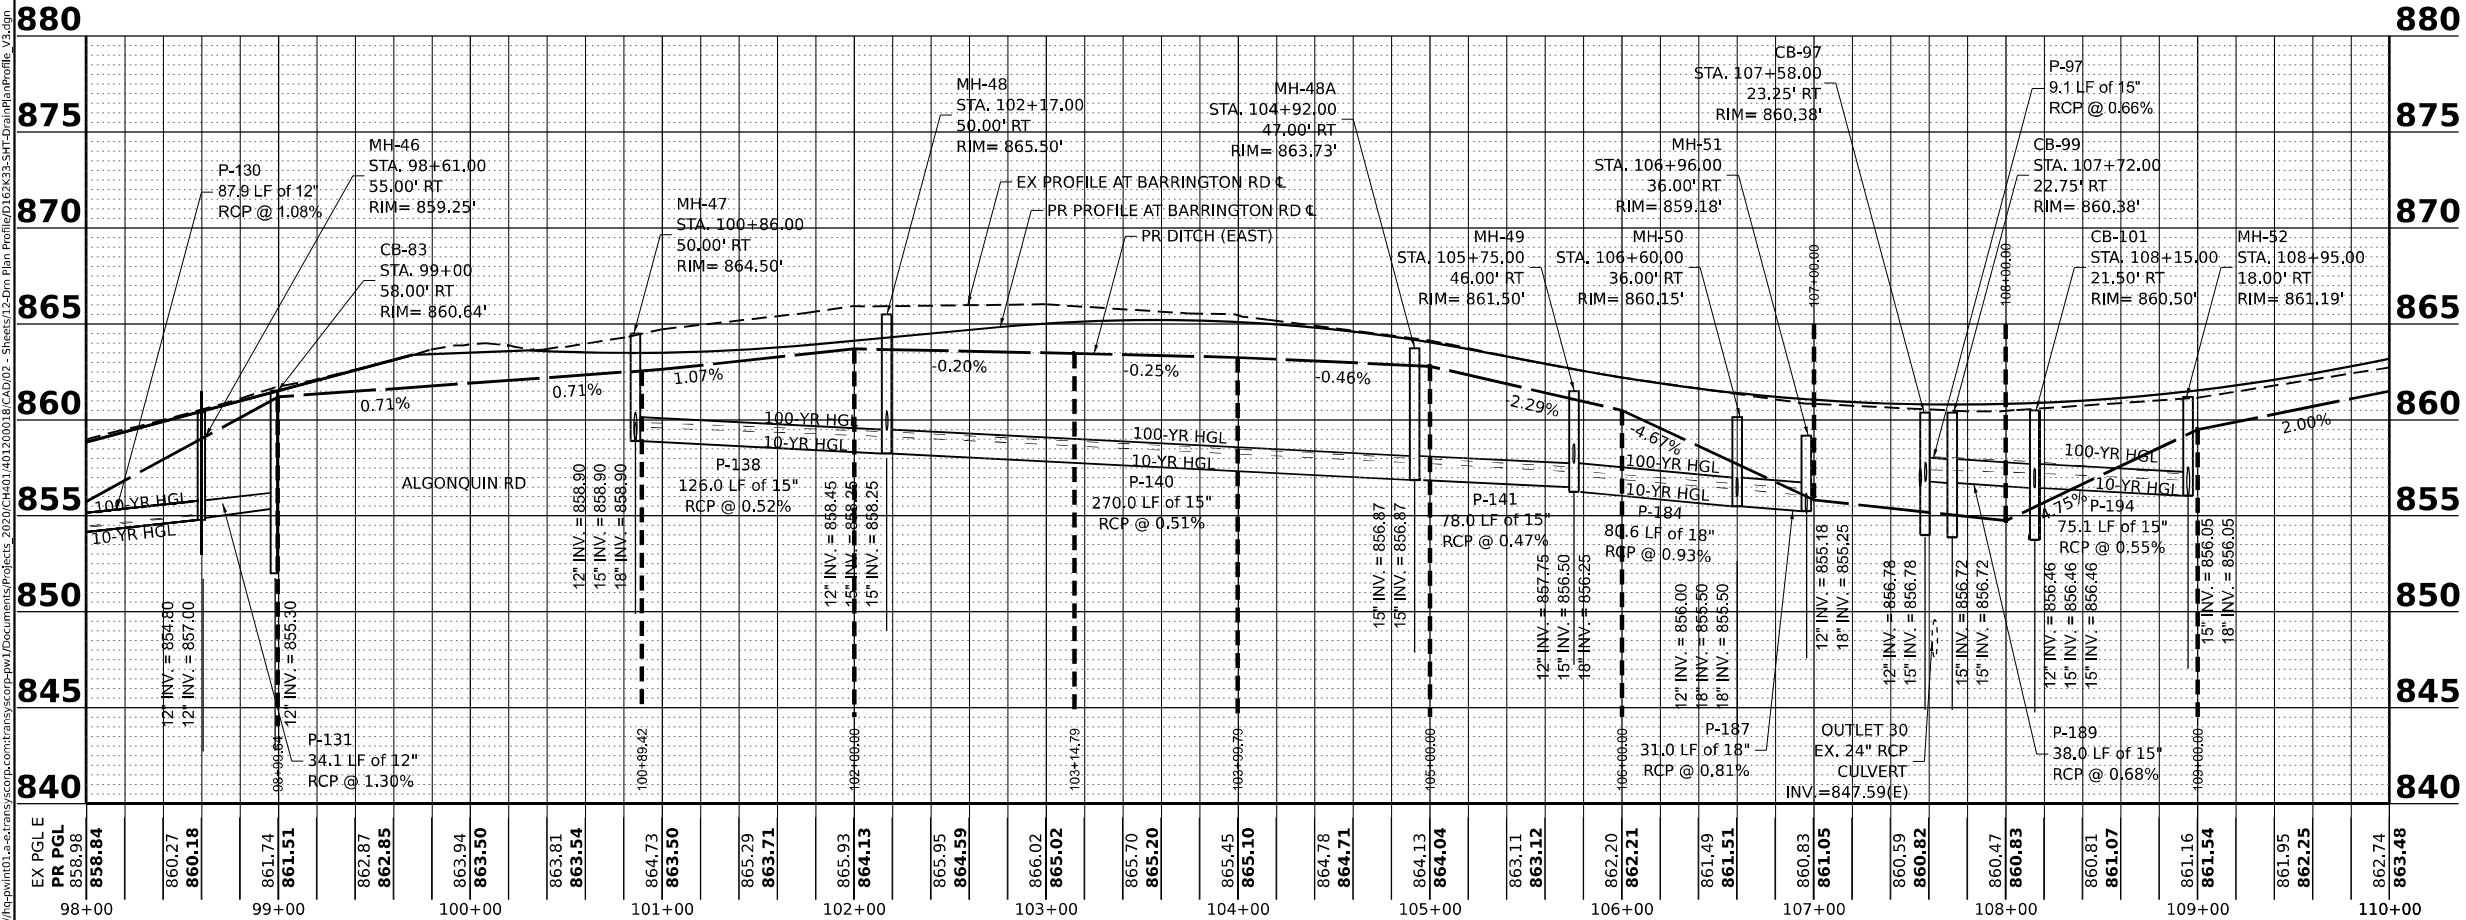

MODEL: PR_BAR_Rin_9 (Sheet)
 FILE NAME: P:\Projects\2019-161-W\Drawings\DWG\2019-161-W-DRAINAGE\2019-161-W-DRAINAGE-PR-DRAINAGE-PROFILE_V2.dwg
 PROJECT: 2019-161-W-DRAINAGE\2019-161-W-DRAINAGE-PR-DRAINAGE-PROFILE_V2.dwg
 SHEET: 7 OF 13 SHEETS
 DATE: 01/21/2026




USER NAME = vpelegrimas	DESIGNED - TSHINEZORIG	REVISED -
PLOT SCALE = 0.16666667 / in.	DRAWN - ADURAN	REVISED -
PLOT DATE = 1/13/2026	CHECKED - VPELEGRIMAS	REVISED -
	DATE - 01/21/2026	REVISED -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BARRINGTON ROAD DRAINAGE PLAN AND PROFILE	
SCALE: 1"=50'	STA. 98+00 TO STA. 110+00
SHEET 7 OF 13 SHEETS	CONTRACT NO. 62K33

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	184
ILLINOIS FED. AID PROJECT				




FOREST PRESERVE OF COOK COUNTY

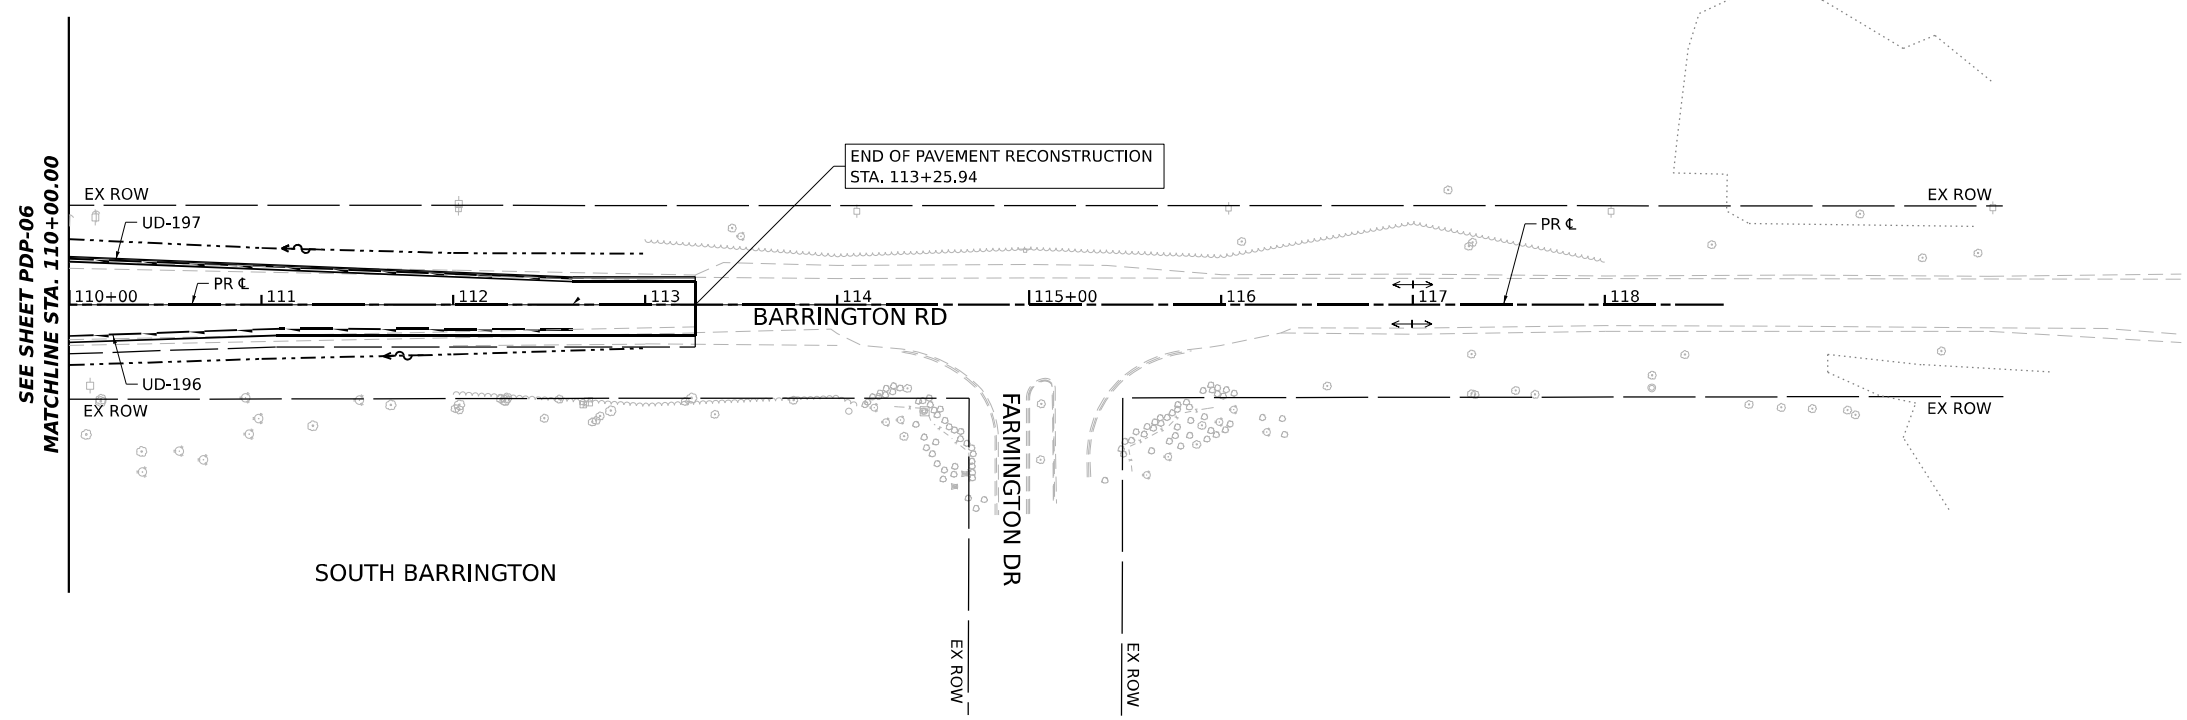

DRAINAGE LEGEND

- P-### PROPOSED STORM SEWER PIPE LABEL
- S-### PROPOSED DRAINAGE STRUCTURE LABEL
- UD-### PROPOSED PIPE UNDERDRAIN LABEL
- EXISTING SWALE
- EXISTING DITCH FLOW
- PROPOSED DITCH FLOW
- PROPOSED SUMMIT
- EXISTING SEWER
- PROPOSED SEWER
- EXISTING CULVERT
- PROPOSED PIPE CULVERT
- PROPOSED UNDERDRAIN
- EXISTING DRAINAGE STRUCTURE
- PROPOSED CATCHBASIN
- PROPOSED MANHOLE
- PROPOSED END SECTION / FLARED END SECTION
- PERMANENT DITCH CHECK

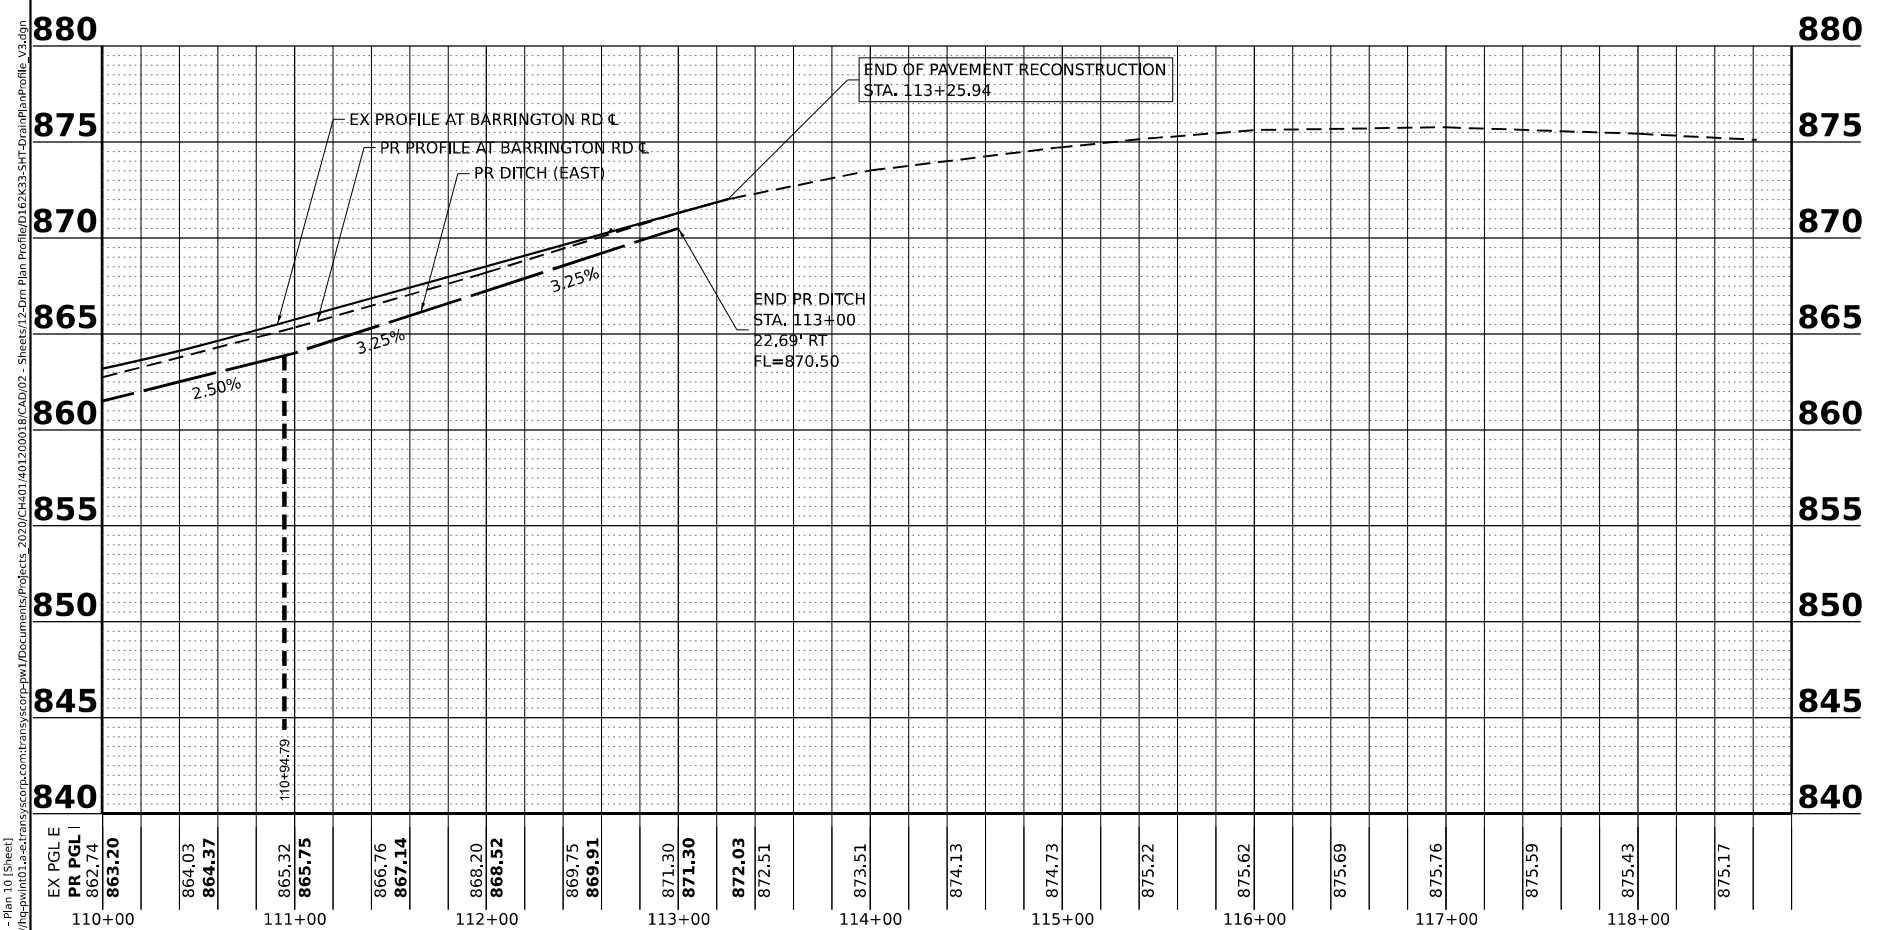

EX PGL E PR PGL I 862.74	863.20	864.03	864.37	865.32	865.75	866.76	867.14	868.20	868.52	869.75	869.91	871.30	871.30	872.03	872.51	873.51	874.13	874.73	875.22	875.62	875.69	875.76	875.59	875.43	875.17
110+00	111+00			112+00				113+00				114+00				115+00				116+00			117+00		118+00

MODEL: PR_BAR - Plan 10 (Sheet)
 FILE NAME: P:\Projects\2019-161-W\Servers\scor\p1\Documents\Projects_2020\CAD\01-1401200118\CAD\02 - Sheet\02.Dwg
 Project: Barrington Road Drainage Plan and Profile_V2.dwg





USER NAME = vpelegrimas	DESIGNED - TSHINEZORIG	REVISED -
PLOT SCALE = 0.166666685 1/ in.	DRAWN - ADURAN	REVISED -
PLOT DATE = 1/13/2026	CHECKED - VPELEGRIMAS	REVISED -
	DATE - 01/21/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BARRINGTON ROAD
DRAINAGE PLAN AND PROFILE**

SCALE: 1"=50' SHEET 8 OF 13 SHEETS STA. 110+00 TO STA. 119+00

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 185
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	

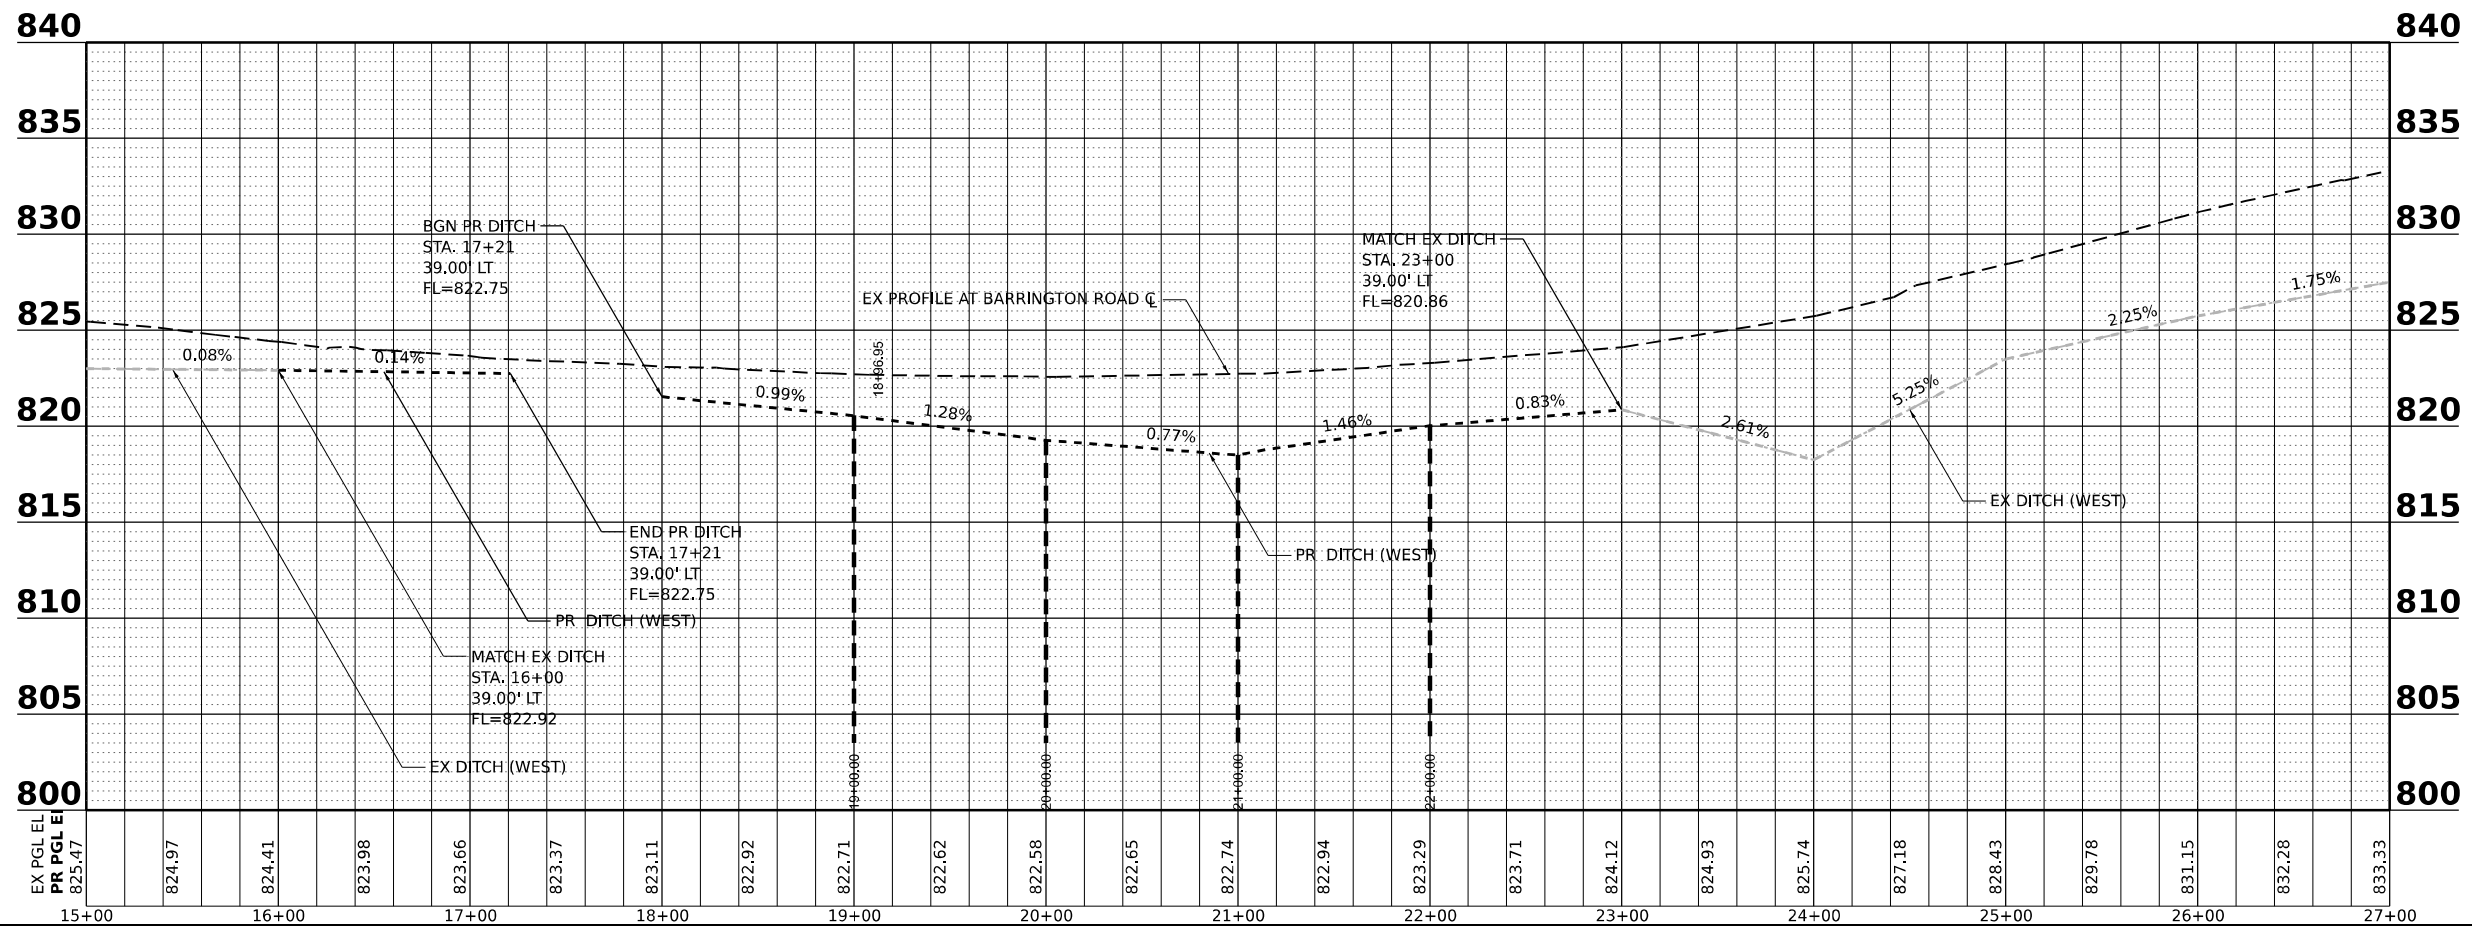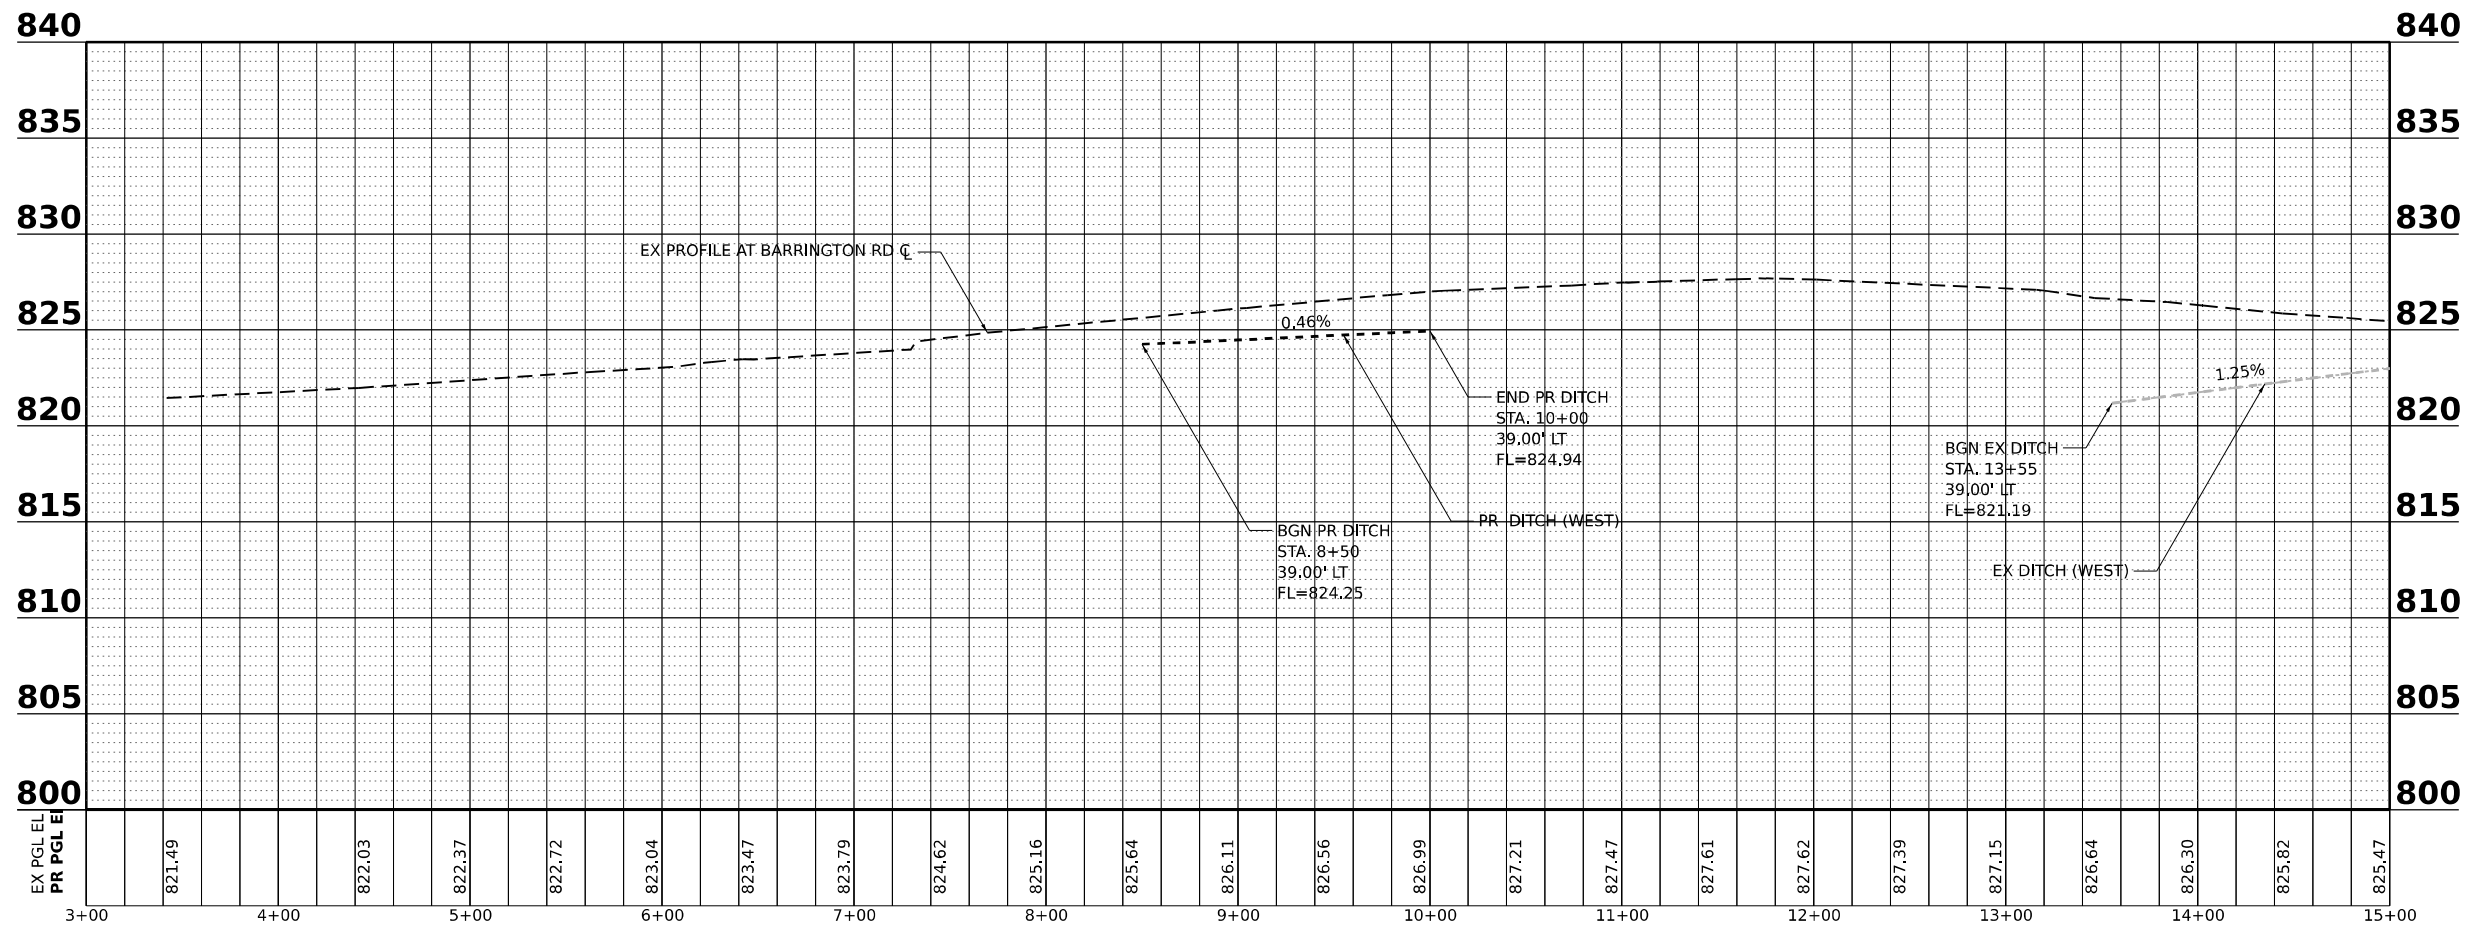

MODEL: Left Profile - Left Profile - 1 (Sheet)
 FILE NAME: p:\projects\2019-161-w\2019-161-w\2019-161-w\2019-161-w\CAD\02 - Sheets\12-Dm Plan Profile\12EX33-SHT-DRAIN2Profile



USER NAME	= vpelegrimas
PLOT SCALE	= 0.16666000 "/in.
PLOT DATE	= 1/13/2026

DESIGNED	- TSHINEZORIG	REVISED	-
DRAWN	- ADURAN	REVISED	-
CHECKED	- VPELEGRIMAS	REVISED	-
DATE	- 01/21/2026	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BARRINGTON ROAD
DRAINAGE PLAN AND PROFILE

SCALE: 1"=50'

SHEET 9 OF 13 SHEETS STA. 3+00 TO STA. 27+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	186
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				



USER NAME = mshgphms
 DRAWN = ADURAN
 CHECKED = VPLEGIMAS
 DATE = 01/21/2026



DESIGNED = TSINZONG
 REVISIONS

REVISIONS

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

BARRINGTON ROAD
 DRAINAGE PLAN AND PROFILE

SCALE: 1"=50'
 SHEET 12 OF 13 SHEETS STA. 75+00 TO STA. 98+00

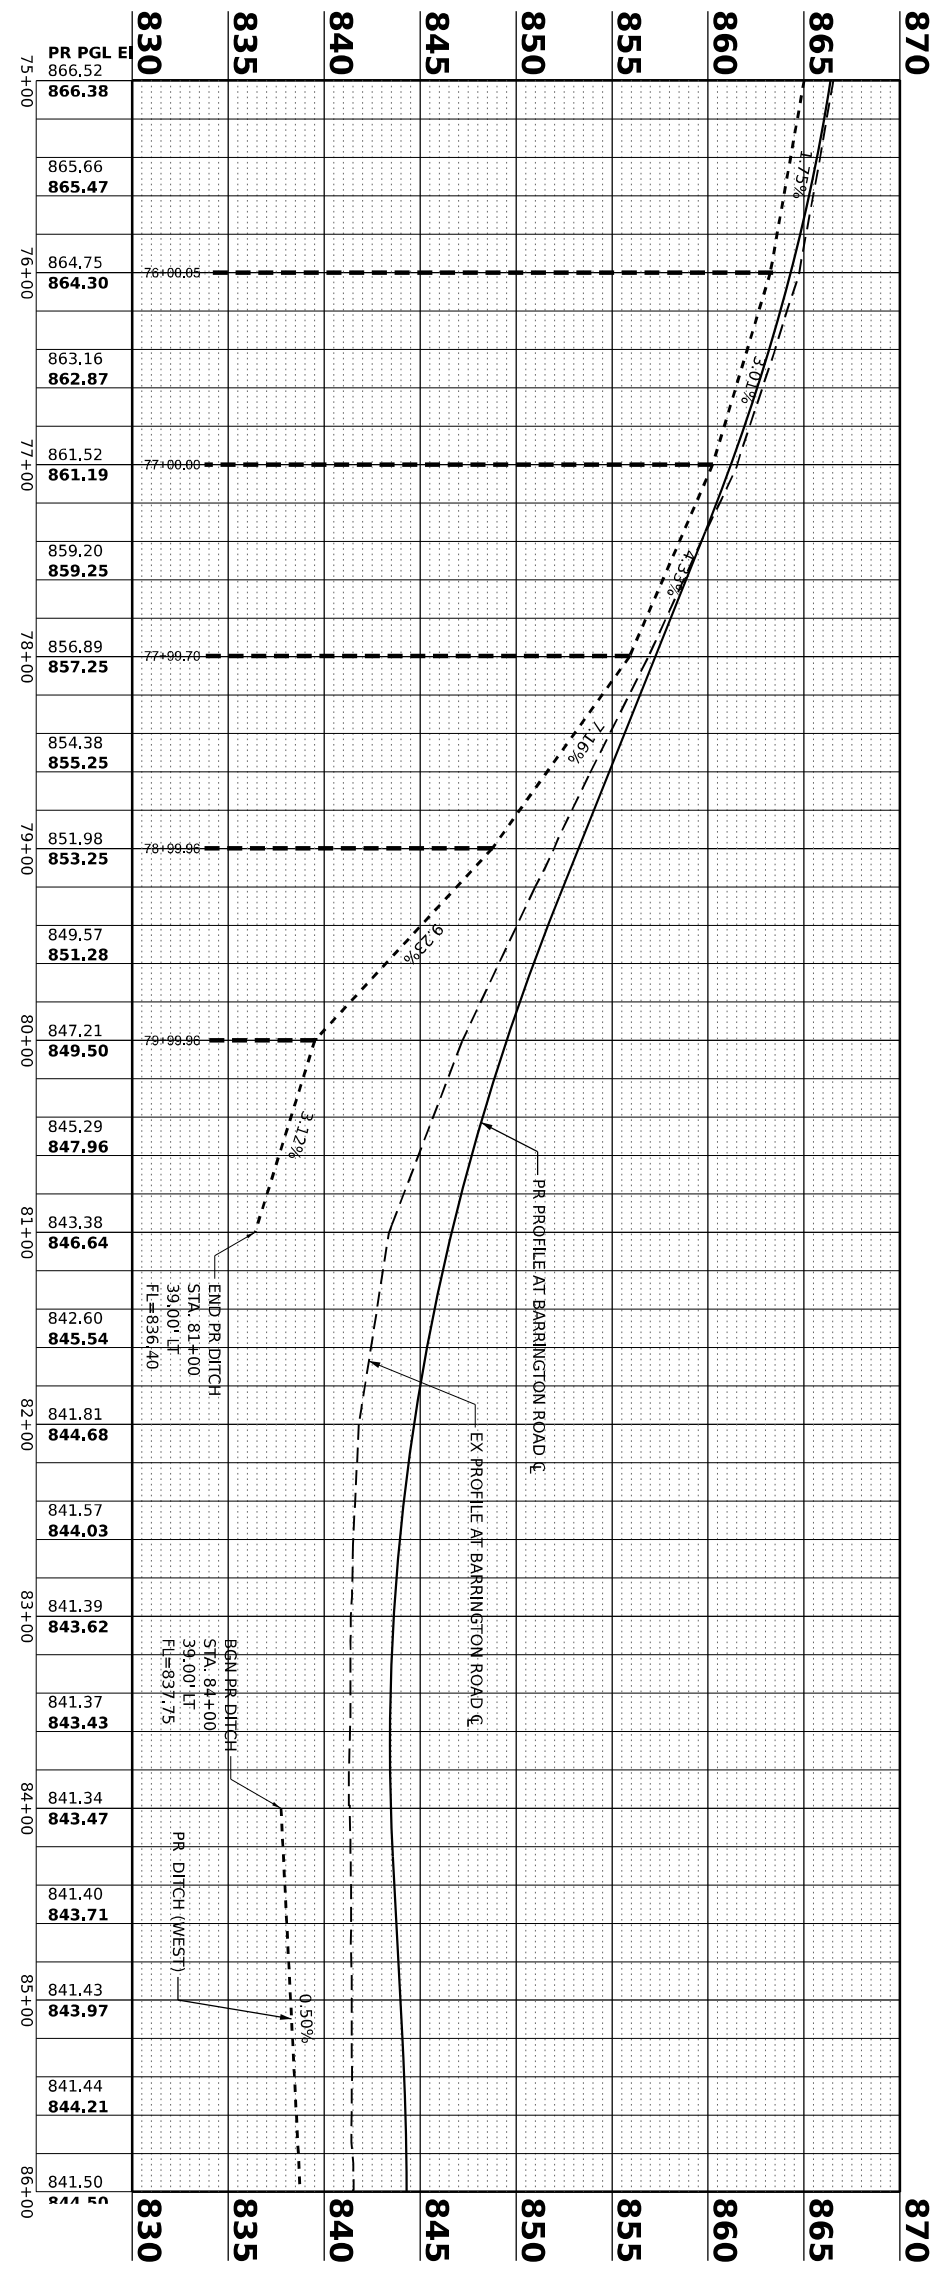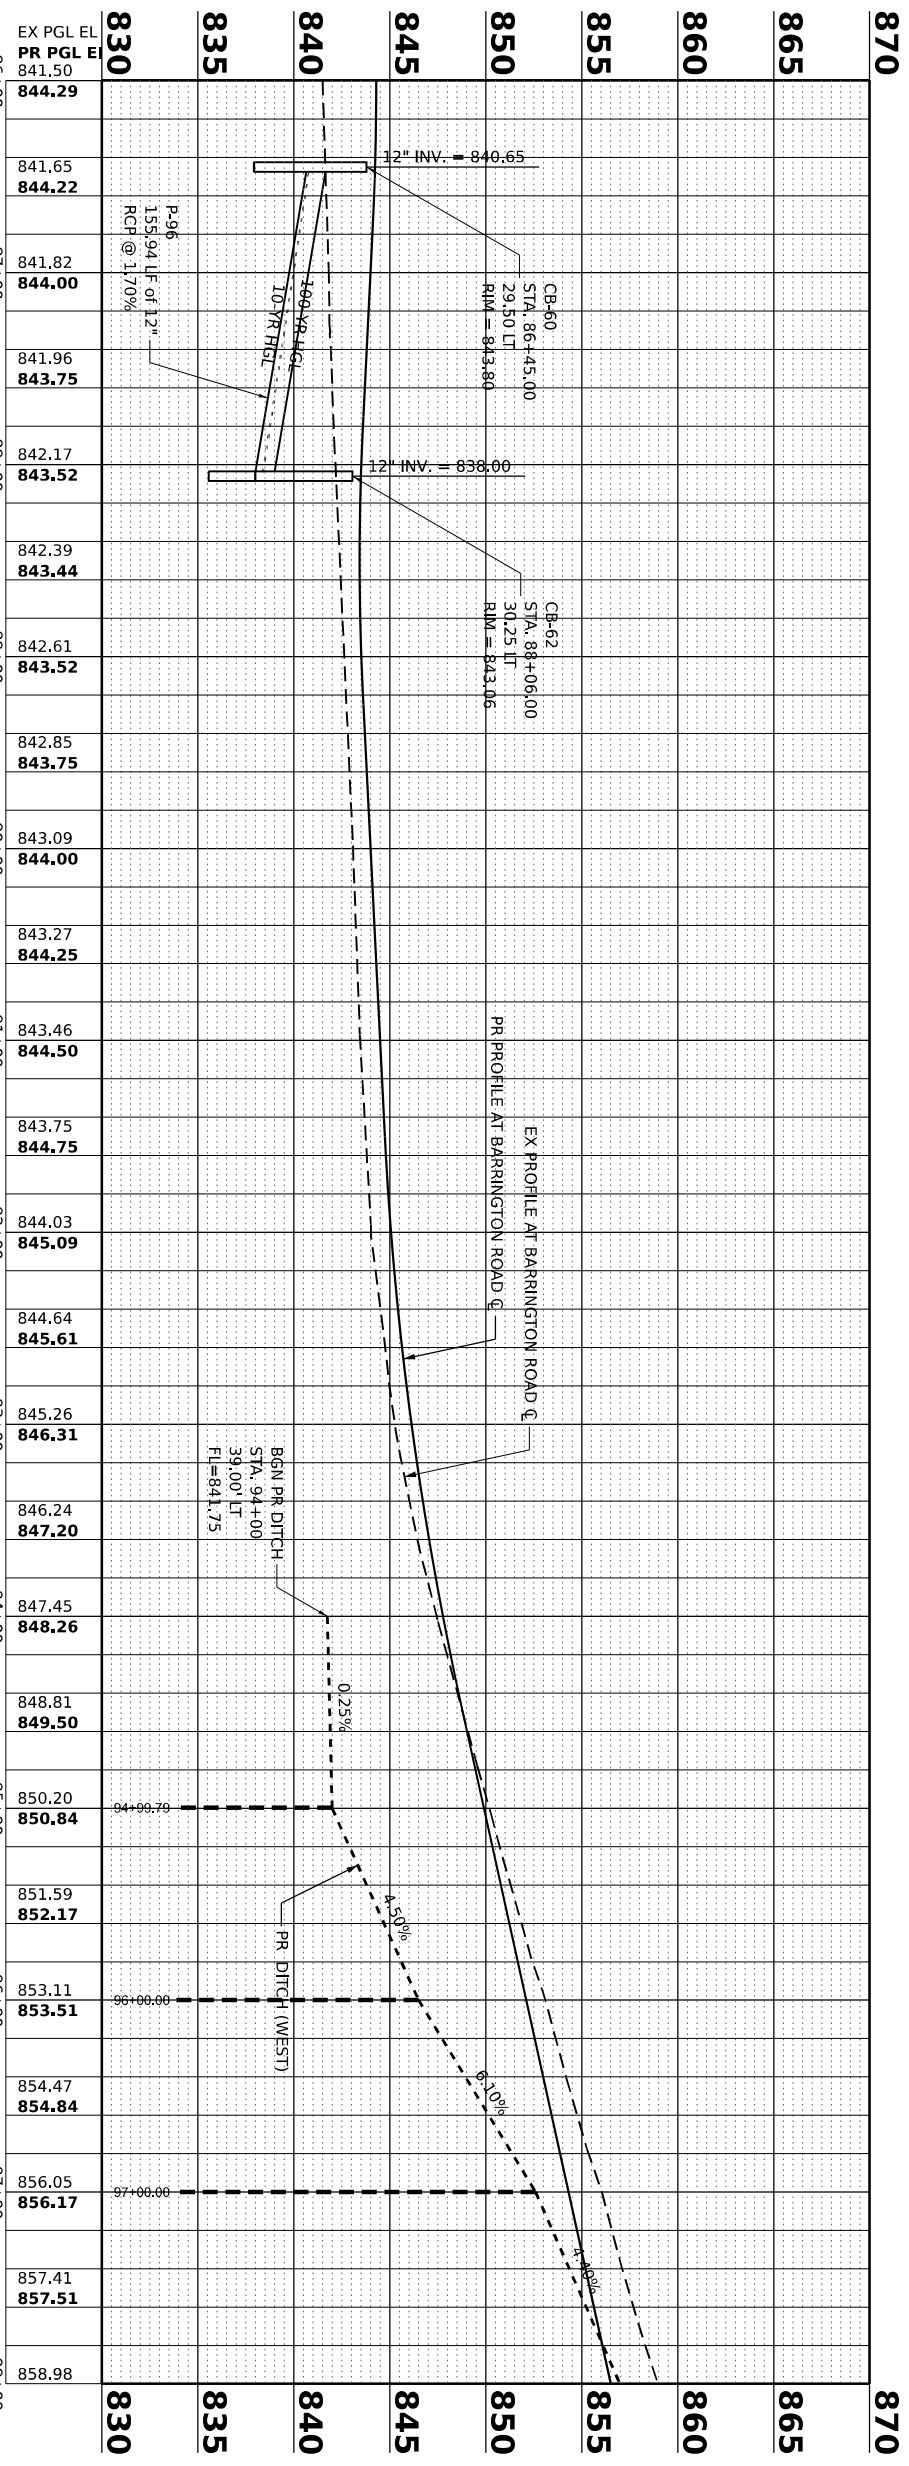

STA.	PR PGL EL	EX PGL EL	STA.	PR PGL EL	EX PGL EL
86+00	841.50	844.29	86+00	866.52	866.38
87+00	841.65	844.22	87+00	864.75	864.30
88+00	841.82	844.00	88+00	863.16	862.87
89+00	841.96	843.75	89+00	861.52	861.19
90+00	842.17	843.52	90+00	859.20	859.25
91+00	842.39	843.44	91+00	856.89	857.25
92+00	842.61	843.52	92+00	854.38	855.25
93+00	842.85	843.75	93+00	851.98	853.25
94+00	843.09	844.00	94+00	849.57	851.28
95+00	843.27	844.25	95+00	847.21	849.50
96+00	843.46	844.50	96+00	845.29	847.96
97+00	843.75	844.75	97+00	843.38	846.64
98+00	844.03	845.09	98+00	842.60	845.54
	844.64	845.61		841.81	844.68
	845.26	846.31		841.57	844.03
	846.24	847.20		841.39	843.62
	847.45	848.26		841.37	843.43
	848.81	849.50		841.34	843.47
	850.20	850.84		841.40	843.71
	851.59	852.17		841.43	843.97
	853.11	853.51		841.44	844.21
	854.47	854.84		841.50	844.50
	856.05	856.17			
	857.41	857.51			
	858.98				

SHEET NO.	STRUCTURE NO.	STATION	OFFSET (-) LT/(+) RT	RIM ELEV.	STRUCTURE DIA. (FT)	INCOMING PIPE (1) NO.	PIPE (1) SIZE (IN)	PIPE (1) INV. ELEV.	INCOMING PIPE (2) NO.	PIPE (2) SIZE (IN)	PIPE (2) INV. ELEV.	INCOMING PIPE (3) NO.	PIPE (3) SIZE (IN)	PIPE (3) INV. ELEV.	OUTGOING PIPE NO.	OUTGOING PIPE SIZE (IN)	OUTGOING PIPE INV. ELEV.	PAY ITEM NUMBER	PAY ITEM DESCRIPTION	NOTES
DPP-6	MH-43	94+25	43	848.75	60	P-123	12	844.15	P-124	18	844.75				P-119	18	841.75	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-6	CB-75	94+35	-35	848.67	60										P-120	12	844.7	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-6	CB-76	94+35	12.3	849.13	60	P-120	12	844.4	P-121	12	844.4				P-122	12	844.4	60204805	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 11 FRAME AND GRATE	
DPP-6	CB-78	94+35	35	848.66	60	P-122	12	844.25							P-123	12	844.25	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-6	CB-77	94+54	11	849.61	60										P-121	12	844.5	60204805	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 11 FRAME AND GRATE	
DPP-6	MH-44	95+87	44	852	60	P-127	15	848	P-126	12	848.55				P-124	18	846	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-6	CB-79	95+97	-36	852.99	60										P-125	12	849.25	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-6	CB-80	95+97	36	852.97	60	P-125	12	848.6							P-126	12	848.6	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-6	MH-45	97+69	44	857.87	60	P-130	12	853.85	P-129	12	853.4				P-127	15	849.5	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-6	CB-81	97+79	-36.5	857.84	60										P-128	12	854	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-6	CB-82	97+79	36.5	857.84	60	P-128	12	853.5							P-129	12	853.5	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	MH-46	98+61	55	859.25	60	P-131	12	854.8							P-130	12	854.8	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-7	CB-83	99+00	58	860.64	60										P-131	12	855.3	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-86A	100+60	-35.5	863.09	60										P-133A	12	859.6	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-86	100+70	-35.5	863.07	60	P-133A	12	859.43	P-133B	12	859.43	P-133C	12	859.43	P-134	12	859.43	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-86D	100+85	-60	823.7	48										P-86D	12	813.84	60201340	CATCH BASINS, TYPE A, 4'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	MH-47	100+86	50	864.5	60	P-137A	12	858.9	P-137	18	858.9				P-138	15	858.9	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-7	CB-87	100+87	36.5	863.06	60	P-134	12	858.95	P-136	12	858.95				P-137	18	858.95	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-88	100+98	36.5	863.07	60	P-135	12	859							P-136	12	859	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-88A	101+00	46	862.63	24										P-137A	12	858.97	60207605	CATCH BASINS, TYPE C, TYPE 8 GRATE	
DPP-7	CB-88R	101+00	-52	862.77	60	P-86D	12	852.92							P-133R	12	859.7	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-89	101+10	7.5	863.53	60										PM-135	12	859.25	60204805	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 11 FRAME AND GRATE	
DPP-7	CB-89A	101+10	16.5	863.53	60	PM-135	12	859.2							P-135	12	859.2	60204805	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 11 FRAME AND GRATE	
DPP-7	CB-85	101+75	-37	863.47	60										P-133	12	859.85	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	MH-48	102+17	50	865.5	60	P-138	15	858.25	P-180	12	858.9				P-140	15	858.25	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-7	CB-90	102+17	-36.5	863.89	60	P-132	12	859.6	P-133	12	859.6				P-139	12	859.6	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-91	102+17	36.5	863.89	60	P-139A	12	859							P-180	12	859	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-90A	102+17	7.5	864.29	60	P-139	12	859.15							P-139A	12	859.15	60204805	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 11 FRAME AND GRATE	
DPP-7	CB-84	102+25	-45	863.83	24										P-132	12	860	60207605	CATCH BASINS, TYPE C, TYPE 8 GRATE	
DPP-7	MH-48A	104+92	47	863.73	60	P-140	15	856.87							P-141	15	856.87	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-7	CB-92	105+74	-31	862.21	60										P-182	12	858.25	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-93	105+74	29.5	862.21	60	P-182	12	857.8							P-183	12	857.8	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	MH-49	105+75	46	861.5	60	P-183	12	857.75	P-141	15	856.5				P-184	18	856.25	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-7	CB-94	106+54	-29.5	861	60										P-185	12	857	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-95	106+54	26.8	861	60	P-185	12	856.25							P-186	12	856.25	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	MH-50	106+60	36	860.15	60	P-186	12	856	P-184	18	855.5				P-187	18	855.5	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-7	MH-51	106+96	36	859.18	60	P-187	18	855.25							P-188	12	855.18	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-7	HW-24	107+06	43	855		P-188	18	854.98										54213663	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 18"	
DPP-7	CD-96	107+50	-27.5	860.38	60	P-190	12	857							P-191	12	857	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-97	107+58	23.3	860.38	60	P-191A	12	856.78							P-97	15	856.78	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CBM-96	107+58	-6	860.81	60	P-191	12	856.89							PM-191	12	856.89	60204805	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 11 FRAME AND GRATE	
DPP-7	CBM-97	107+58	6	860.81	60	PM-191	12	856.86							P-191A	12	856.86	60204805	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 11 FRAME AND GRATE	
DPP-7	EX FES-1	107+63	-58												EX P-5	24	848.85			EXISTING HEADWALL TO REMAIN
DPP-7	CB-98	107+68	-27.3	860.38	60										P-190	12	857.05	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-99	107+72	22.8	860.38	60	P-97	15	856.72							P-189	15	856.72	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-100	108+15	-26.5	860.5	60										P-193	12	856.85	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	CB-101	108+15	21.5	860.5	60	P-193	12	856.46	P-189	15	856.46				P-194	15	856.46	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	HW-25	108+90	30	856		P-195	18	856										54213663	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 18"	
DPP-7	MH-52	108+95	18	861.19	60	P-194	15	856.05							P-195	18	856.05	60221100	MANHOLES, TYPE A, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	
DPP-7	CB-102	109+25	-24.3	861.53	60										P-196	15	858.55	60205040	CATCH BASINS, TYPE A, 5'-DIAMETER, TYPE 24 FRAME AND GRATE	
DPP-7	I/W-26	109+25	-31			P-196	15	858.5										54261315	CONCRETE END SECTION, STANDARD 542001, 15", 1:3	

MODEL: Drainage Structure Schedules 3
FILE NAME: P:\Projects\2019\2019-2020\2019-2020\018_CAD\02_Schedule\04-Dm_Schedule\02-33-33-SHT-DrainSchedules.dgn



USER NAME = vpelegrimas	DESIGNED - TSHINEZORIG	REVISED -
	DRAWN - ADURAN	REVISED -
PLOT SCALE = 0.16666633 1/ in.	CHECKED - VPELEGRIMAS	REVISED -
PLOT DATE = 1/13/2026	DATE - 01/21/2026	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BARRINGTON ROAD DRAINAGE SCHEDULES			
SCALE:	SHEET 3	OF 8	SHEETS
	STA.		TO STA.

F.A.P. RTE. 362	SECTION 2019-161-W	COUNTY COOK	TOTAL SHEETS 666	SHEET NO. 193
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				


Model - Drainage Pipe Schedule 2
FILE NAME: P:\Projects\2019\2019-01\2019-01-01\2019-01-01-001\B-CAD\02 - SHEETS\02-01-DRAIN SCHEDULES\02-01-DRAIN SCHEDULES.dwg

SHEET NO.	PIPE NO.	FROM STRUCTURE	STATION	OFFSET (-) LT/(+) RT	RIM ELEV	INVERT (FT)	TO STRUCTURE	STATION	OFFSET (-) LT/(+) RT	RIM ELEV (FT)	INVERT (FT)	PIPE SIZE (IN)	PIPE LENGTH (FT)	SLOPE (%)	TRENCH BACKFILL (20800150) (CY)	PAY ITEM NO.	PAY ITEM DESCRIPTION
DDP-4	P-50	CB-31	65+96	-29.5	856.12	852.35	CB-32	65+96	-29.5	856.12	852.1	12	16	1.20%	1.9	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	PM-30	CBM-30	65+96	-9	856.5	852.5	CB-31	65+96	-9	856.5	852.35	12	16	0.70%	2.3	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	PM-30A	CBM-30A	65+96	9	856.54	852.75	CBM-30	65+96	9	856.54	852.5	12	14	1.40%	1.7	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-49A	MH-19	66+11	-40	856.24	852	HW-9	66+11	-40	856.24	851.95	15	7.5	0.50%		550A0070	STORM SEWERS, CLASS A, TYPE 1 15"
DDP-4	P-49	CB-32	66+17	-29.5	856.08	852.1	MH-19	66+17	-29.5	856.08	852	15	7.3	0.80%	0.9	550A0070	STORM SEWERS, CLASS A, TYPE 1 15"
DDP-4	P-51	CB-33	66+27	-29.5	856.08	852.3	CB-32	66+27	-29.5	856.08	852.1	12	5	2.00%	0.6	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-52	MH-20	66+69	-40	856.4	852.5	MH-19	66+69	-40	856.4	852	12	53	0.90%		550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-53	CB-34	66+76	-29.5	856.18	852.6	MH-20	66+76	-29.5	856.18	852.5	12	7.6	0.80%	0.7	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-58	CB-37	67+26	29.5	856.46	853.4	MH-22	67+26	29.5	856.46	853.35	15	6.1	0.50%	0.02	550A0070	STORM SEWERS, CLASS A, TYPE 1 15"
DDP-4	P-60	MH-22	67+34	37	857	852.45	MH-23	67+34	37	857	852.28	21	84	0.20%		550A0110	STORM SEWERS, CLASS A, TYPE 1 21"
DDP-4	P-48	MH-21	67+41	-40	856.9	852.1	HW-11	67+41	-40	856.9	852	18	12	0.70%		550A0380	STORM SEWERS, CLASS A, TYPE 2 18"
DDP-4	P-56	CB-35	67+47	-29.5	856.62	853.62	MH-21	67+47	-29.5	856.62	853.55	12	7.1	0.60%	0.1	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-57	CB-36	67+47	29.5	856.63	853.5	CB-37	67+47	29.5	856.63	853.4	15	16	0.50%	0.2	550A0070	STORM SEWERS, CLASS A, TYPE 1 15"
DDP-4	PM-37	CBM-36	67+47	9	857.06	853.79	CB-36	67+47	9	857.06	853.5	12	16	1.40%	1.0	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	PM-37A	CBM-35	67+47	2	857.23	853.9	CBM-36	67+47	2	857.23	853.79	12	3	1.60%	0.2	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-63	MH-23	68+23	37	858	852.28	HW-12	68+23	37	858	852.2	24	2	1.80%	0.7	550A0410	STORM SEWERS, CLASS A, TYPE 2 24"
DDP-4	P-59	MH-24	68+26	-40	857.9	852.5	MH-21	68+26	-40	857.9	852.1	18	80	0.50%		550A0380	STORM SEWERS, CLASS A, TYPE 2 18"
DDP-4	P-61	CB-38	68+33	-29.5	857.62	853.65	MH-24	68+33	-29.5	857.62	853.56	12	7.7	0.70%	1.0	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-62	CB-39	68+33	29.5	857.62	854.1	MH-23	68+33	29.5	857.62	854	12	7.6	0.80%	0.6	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-65	MH-26	70+50	36	863.12	852.75	MH-23	70+50	36	863.12	852.28	21	222	0.20%		550A0400	STORM SEWERS, CLASS A, TYPE 2 21"
DDP-4	P-64	MH-25	70+53	-40	862.55	853.75	MH-24	70+53	-40	862.55	852.5	12	221.5	0.60%		550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-4	P-66	CB-40	70+60	-29.5	862.73	857.5	MH-25	70+60	-29.5	862.73	857.4	12	7.1	0.80%	2.0	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-4	P-67	CB-41	70+60	29.5	862.73	857	MH-26	70+60	29.5	862.73	856.75	12	6.9	2.10%	2.4	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-4	P-68	CB-42	73+44	-33.5	867.18	863.96	HW-13	73+44	-33.5	867.18	863.52	12	77.9	0.50%	3.4	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-4	P-69	CB-43	74+28	-34	867.15	864.24	CB-42	74+28	-34	867.15	863.96	12	79	0.30%	1.7	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	PW-1	CBW-1	77+50	39	860.4	852	MH-27	77+50	39	860.4	851.37	12	54.5	1.10%	57.7	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-70	CB-44	78+00	-29.5	856.81	852.11	CBM-44	78+00	-29.5	856.81	851.87	12	15	1.20%	3.4	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-70A	CBM-45	78+00	9.5	857.25	851.71	CB-45	78+00	9.5	857.25	851.47	12	15	1.20%	4.9	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-71	CB-45	78+00	29.5	856.81	851.47	MH-27	78+00	29.5	856.81	851.37	12	6.8	0.80%	2.0	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	PM-70	CBM-44	78+00	-9.5	857.25	851.87	CBM-45	78+00	-9.5	857.25	851.71	12	14	0.80%	4.3	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-72	MH-27	78+07	39	856	847.48	MH-28	78+07	39	856	846.02	15	141	1.00%		550A0360	STORM SEWERS, CLASS A, TYPE 2 15"
DDP-5	P-73	MH-28	79+53	39	850.25	842.68	MH-29	79+53	39	850.25	841	15	150	1.10%		550A0360	STORM SEWERS, CLASS A, TYPE 2 15"
DDP-5	P-74	CB-46	81+00	-29.5	846.2	842.2	CB-47	81+00	-29.5	846.2	841.88	12	54	0.50%	8.2	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-75	CB-47	81+00	29.5	846.2	841.88	MH-29	81+00	29.5	846.2	841.83	12	7.4	0.40%	1.3	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-76	MH-29	81+08	39	845	840	MH-30	81+08	39	845	839.02	18	94	1.00%		550A0380	STORM SEWERS, CLASS A, TYPE 2 18"
DDP-5	C-4	HW-14	81+46	59		836.8	HW-15	81+46	59		836.5	24	52	0.60%	2.7	542A0229	PIPE CULVERTS, CLASS A, TYPE 1 24"
DDP-5	P-78	CB-48	81+99	-29.5	844.25	840.5	CB-49	81+99	-29.5	844.25	840.17	12	54	0.60%	6.7	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-79	CB-49	81+99	29.5	844.25	840.17	MH-30	81+99	29.5	844.25	840.1	12	7.4	0.60%	1.1	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-83	MH-30	82+07	39	843	836.42	HW-16	82+07	39	843	836.39	24	8.7	0.30%		550A0410	STORM SEWERS, CLASS A, TYPE 2 24"
DDP-5	P-80	MH-31	82+93	38	842.5	839.33	MH-30	82+93	38	842.5	838.88	15	81	0.50%		550A0070	STORM SEWERS, CLASS A, TYPE 1 15"
DDP-5	P-81	CB-50	83+02	-29.5	843.16	839.75	CBM-50	83+02	-29.5	843.16	839.62	12	15	0.60%	1.1	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-81A	CBM-51	83+02	6.5	843.65	839.56	CB-51	83+02	6.5	843.65	839.43	12	18	0.60%	2.7	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-81B	CBW-2	83+02	-49	842.85	839.99	CBM-50	83+02	-49	842.85	839.75	12	16	1.56%	0.9	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-82	CB-51	83+02	29.5	843.16	839.43	MH-31	83+02	29.5	843.16	839.33	12	7.4	0.80%	0.8	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	PM-81	CBM-50	83+02	-9.5	843.61	839.62	CBM-51	83+02	-9.5	843.61	839.56	12	11	0.40%	1.5	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-84	CB-52	83+62	-29.5	842.98	838.98	CB-54	83+62	-29.5	842.98	838.93	12	5	0.50%	0.7	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-87	CB-53	83+62	29.5	842.98	839.35	CB-55	83+62	29.5	842.98	839.3	12	5	0.50%	0.5	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-85	CB-54	83+72	-29.5	842.98	838.93	CB-56	83+72	-29.5	842.98	838.75	12	24	0.60%	3.6	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-88	CB-55	83+72	29.5	842.98	839.3	CB-57	83+72	29.5	842.98	838.12	12	24	4.10%	4.0	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-86	CB-56	84+01	-29.5	843.04	838.75	CBM-56	84+01	-29.5	843.04	838.51	12	15	1.20%	2.7	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-86A	CBM-57	84+01	1.8	843.59	838.43	CB-57	84+01	1.8	843.59	838.12	12	22.8	1.10%	6.6	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-89	CB-57	84+01	29.5	843.04	838.12	MH-33	84+01	29.5	843.04	838	12	5.5	1.10%	1.4	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-92	MH-33	84+01	40	841.51	838	MH-34	84+01	40	841.51	837.51	18	94	0.50%		550A0090	STORM SEWERS, CLASS A, TYPE 1 18"
DDP-5	PM-86	CBM-56	84+01	-9.5	843.47	838.51	CBM-57	84+01	-9.5	843.47	838.43	12	6.3	0.70%	1.6	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-5	P-90	MH-34	85+00	40	842.18	835.13	HW-17	85+00	40	842.18	835.1	18	8.3	0.30%		550A0380	STORM SEWERS, CLASS A, TYPE 2 18"
DDP-5	P-93	CB-58	85+00	-29.5	843.44	839.9	CB-59	85+00	-29.5	843.44	839.1	12	54	1.40%	6.8	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-5	P-94	CB-59	85+00	29.5	843.44	839.1	MH-34	85+00	29.5	843.44	839.05	12	5.5	0.50%	1.0	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-6	P-96	CB-60	86+45	-29.5	843.8	840.65	CB-62	86+45	-29.5	843.8	838	12	155.9	1.60%	29.5	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-6	P-61B	MH-36	87+27	39	842.75	836.39	HW-18	87+27	39	842.75	836.32	15	9	0.60%		550A0360	STORM SEWERS, CLASS A, TYPE 2 15"
DDP-6	P-61A	CB-61	87+36	29.8	843.38	839.4	MH-36	87+36	29.8	843.38	839.3	12	7.9	0.80%	1.1	550A0050	STORM SEWERS, CLASS A, TYPE 1 12"
DDP-6	EX P-4	EX HW-6	87+56	-110.8		839.11	EX HW-5	87+56	-110.8		837.97	21	87				EXISTING SEWER TO REMAIN
DDP-6	P-101	CB-62	88+06	-30.3	843.06	838	MH-37	88+06	-30.3	843.06	837.5	12	64.3	0.70%	18.4	550A0340	STORM SEWERS, CLASS A, TYPE 2 12"
DDP-6	P-101A	MH-37	88+06	39	842.5	836.6	HW-19	88+06	39	842.5	836.5	18	18.1	0.50%		550A0380	STORM SEWERS, CLASS A, TYPE 2 18"
DDP-6	P-102	MH-38	88+36	38	842.75	837.75	MH-37	88+36	38	842.75	837.5	18	25	0.80%		550A0380	STORM SEWERS, CLASS A, TYPE 2 18"
DDP-6	P-104	CB-63	88+46	-30.5	843	838.9	CBM-63	88+46	-30.5	843	838.77	15	15	0.60%	2.1	550A0070	STORM SEWERS, CLASS A, TYPE 1 15"
DDP-6	P-104A	CBM-64	88+46	10.5	843.44	838.65	CB-64	88+46	10.5	843.44	838.5	15	15	0.70%	3.4	550A0360	STORM SEWERS, CLASS A, TYPE 2 15"
DDP-6	P-106	CB-64	88+46	30.5	843	838.5	MH-38	88+46	30.5	843	838.4	18	7.6	0.80%	1.3		

PIPE UNDERDRAIN SCHEDULE										(60108100) PIPE UNDERDRAIN S, 4" (SPECIAL)	NOTES
(60108204) PIPE UNDERDRAINS, TYPE 2, 4"											
SHEET NO.	PIPE NO.	FROM STRUCTURE	FROM STATION	OFFSET (-) LT/(+) RT	TO STRUCTURE	TO STATION	OFFSET (-) LT/(+) RT	PIPE SIZE (INCH)	LENGTH (FT)	LENGTH (FT)	
DPP-2	U-100	EX MH-1	44+41	-42.00	MH-1	44+58	-34.00	4	17	2	ALONG GUTTER
DPP-2	U-101	MH-1	44+58	-34.00	CB-1	44+77	-29.50	4	16	2	ALONG GUTTER
DPP-2	U-102	CB-3	44+72	29.50	CB-5	46+24	29.50	4	148	2	ALONG GUTTER
DPP-2	U-103	CB-1	44+77	-29.50	CB-4	46+24	-29.50	4	143	2	ALONG GUTTER
DPP-2	U-104	CB-5	46+24	29.50	CB-6	47+70	29.50	4	142	2	ALONG GUTTER
DPP-2	U-105	CB-4	46+24	-29.50	CB-6A	47+70	-29.50	4	142	2	ALONG GUTTER
DPP-2	U-106	CB-6	47+70	29.50	HIGH POINT	49+19	29.50	4	145	2	ALONG GUTTER
DPP-2	U-107	CB-6A	47+70	-29.50	HIGH POINT	49+19	-29.50	4	145	2	ALONG GUTTER
DPP-2	U-108	HIGH POINT	49+19	29.50	CB-8	51+00	29.50	4	177	2	ALONG GUTTER
DPP-2	U-109	HIGH POINT	49+19	-29.50	CB-7	51+00	-29.50	4	177	2	ALONG GUTTER
DPP-2	U-110	CB-8	51+00	29.50	CB-10A	52+38	29.50	4	134	2	ALONG GUTTER
DPP-2	U-111	CB-7	51+00	-29.50	CB-9A	52+38	-29.50	4	134	2	ALONG GUTTER
DPP-3	U-112	CB-10A	52+38	29.50	CB-10	52+93	29.50	4	51	2	ALONG GUTTER
DPP-3	U-113	CB-9A	52+38	29.50	CB-9	52+93	-29.50	4	51	2	ALONG GUTTER
DPP-3	U-114	CB-15A	55+37	-29.50	CB-15	54+00	-29.50	4	133	2	ALONG GUTTER
DPP-3	U-115	CB-18	56+90	29.50	CB-16A	54+20	29.50	4	266	2	ALONG GUTTER
DPP-3	U-116	CB-14	53+35	29.50	CB-12	53+08	29.50	4	23	2	ALONG GUTTER
DPP-3	U-117	CB-13	53+35	-29.50	CB-11	53+08	-29.50	4	23	2	ALONG GUTTER
DPP-3	U-118	CB-16	54+00	29.50	CB-14	53+35	29.50	4	61	2	ALONG GUTTER
DPP-3	U-119	CB-15	54+00	-29.50	CB-13	53+35	-29.50	4	61	2	ALONG GUTTER
DPP-3	U-120	CB-17	56+90	-29.50	CB-15A	55+37	-29.50	4	149	2	ALONG GUTTER
DPP-3	U-121	CB-20	60+06	-29.50	CB-17	56+90	-29.50	4	314	2	ALONG GUTTER
DPP-3	U-122	CB-18A	57+99	29.50	CB-18	56+90	29.50	4	107	2	ALONG GUTTER
DPP-3	U-123	MH-13	59+70	36.50	CB-18A	57+99	29.50	4	169	2	ALONG GUTTER
DPP-3	U-124	CB-23	62+05	29.50	MH-13	59+70	36.50	4	233	2	ALONG GUTTER
DPP-3	U-125	CB-22	62+05	-29.50	CB-21	60+15	-29.50	4	188	2	ALONG GUTTER
DPP-3	U-126	HIGH POINT	63+00	29.50	CB-23	62+05	29.50	4	93	2	ALONG GUTTER
DPP-3	U-127	HIGH POINT	63+00	-29.50	CB-22	62+05	-29.50	4	93	2	ALONG GUTTER
DPP-3	U-128	HIGH POINT	63+00	29.50	CB-25	64+37	29.50	4	135	2	ALONG GUTTER
DPP-3	U-129	HIGH POINT	63+00	-29.50	CB-24	64+37	-29.50	4	135	2	ALONG GUTTER
DPP-4	U-130	CB-25	64+37	29.50	CB-27	65+18	29.50	4	79	2	ALONG GUTTER
DPP-4	U-131	CB-24	64+37	-29.50	CB-26	65+18	-29.50	4	79	2	ALONG GUTTER
DPP-4	U-132	CB-27	65+18	29.50	CB-28	65+62	29.50	4	42	2	ALONG GUTTER
DPP-4	U-133	CB-26	65+18	-29.50	CB-31	65+96	-29.50	4	76	2	ALONG GUTTER
DPP-4	U-134	CB-28	65+62	29.50	CB-37	67+26	29.50	4	162	2	ALONG GUTTER
DPP-4	U-135	CB-34	66+76	-29.50	CB-31	65+96	-29.50	4	78	2	ALONG GUTTER
DPP-4	U-136	CB-35	67+47	-29.50	CB-34	66+76	-29.50	4	69	2	ALONG GUTTER
DPP-4	U-137	CB-39	68+33	29.50	CB-36	67+47	29.50	4	84	2	ALONG GUTTER
DPP-4	U-138	CB-38	68+33	-29.50	CB-35	67+47	-29.50	4	84	2	ALONG GUTTER
DPP-4	U-139	CB-41	70+60	29.50	CB-39	68+33	29.50	4	225	2	ALONG GUTTER
DPP-4	U-140	CB-40	70+60	-29.50	CB-38	68+33	-29.50	4	225	2	ALONG GUTTER
DPP-4	U-141	HIGH POINT	73+50	29.50	CB-41	70+60	29.50	4	288	2	ALONG GUTTER
DPP-4	U-142	CB-42	73+44	-33.50	CB-40	70+60	-29.50	4	282	2	ALONG GUTTER
DPP-4	U-143	HIGH POINT	73+50	29.50	MH-27	78+07	39.00	4	455	2	ALONG GUTTER
DPP-4	U-144	CB-43	74+28	-34.00	CB-42	73+44	-33.50	4	82	2	ALONG GUTTER
DPP-4	U-145	CB-43	74+28	-34.00	CB-44	78+00	-29.50	4	370	2	ALONG GUTTER
DPP-5	U-146	MH-27	78+07	39.00	CB-47	81+00	29.50	4	291	2	ALONG GUTTER
DPP-5	U-147	CB-44	78+00	-29.50	CB-46	81+00	-29.50	4	298	2	ALONG GUTTER
DPP-5	U-148	CB-47	81+00	29.50	CB-49	81+99	29.50	4	97	2	ALONG GUTTER
DPP-5	U-149	CB-48	81+99	-29.50	CB-46	81+00	-29.50	4	97	2	ALONG GUTTER
DPP-5	U-150	CB-49	81+99	29.50	CB-51	83+02	29.50	4	101	2	ALONG GUTTER
DPP-5	U-151	CB-48	81+99	-29.50	CB-50	83+02	-29.50	4	101	2	ALONG GUTTER
DPP-5	U-152	CB-51	83+02	29.50	CB-53	83+62	29.50	4	58	2	ALONG GUTTER
DPP-5	U-153	CB-50	83+02	-29.50	CB-54	83+72	-29.50	4	68	2	ALONG GUTTER
DPP-5	U-154	CB-53	83+62	29.50	CB-57	84+01	29.50	4	37	2	ALONG GUTTER
DPP-5	U-155	CB-54	83+72	-29.50	CB-56	84+01	-29.50	4	27	2	ALONG GUTTER
DPP-5	U-156	CB-57	84+01	29.50	CB-59	85+00	29.50	4	97	2	ALONG GUTTER
DPP-5	U-157	CB-58	85+00	-29.50	CB-56	84+01	-29.50	4	97	2	ALONG GUTTER
DPP-5	U-158	HIGH POINT	86+00	29.50	CB-59	85+00	29.50	4	98	2	ALONG GUTTER
DPP-5	U-159	HIGH POINT	86+00	-29.50	CB-58	85+00	-29.50	4	98	2	ALONG GUTTER
DPP-5	U-160	HIGH POINT	86+00	29.50	CB-61	87+36	29.80	4	134	2	ALONG GUTTER
DPP-5	U-161	HIGH POINT	86+00	-29.50	CB-60	86+45	-29.50	4	43	2	ALONG GUTTER
DPP-6	U-162	CB-60	86+45	-29.50	CB-62	88+06	-30.30	4	159	2	ALONG GUTTER
DPP-6	U-163	CB-66	88+60	30.50	CB-61	87+36	29.80	4	122	2	ALONG GUTTER
DPP-6	U-164	CB-65	88+60	-30.50	CB-62	88+06	-30.30	4	52	2	ALONG GUTTER
DPP-6	U-165	CB-68	89+49	31.40	CB-66	88+60	30.50	4	87	2	ALONG GUTTER

(60108204) PIPE UNDERDRAINS, TYPE 2, 4"										(60108100) PIPE UNDERDRAIN S, 4" (SPECIAL)	NOTES
DPP-6	U-166	CB-67	89+49	-31.50	CB-65	88+60	-30.50	4	87	2	ALONG GUTTER
DPP-6	U-167	CB-70	90+62	32.20	CB-68	89+49	31.40	4	111	2	ALONG GUTTER
DPP-6	U-168	CB-69	90+62	-32.20	CB-67	89+49	-31.50	4	111	2	ALONG GUTTER
DPP-6	U-169	CB-72	92+19	33.30	CB-70	90+62	32.20	4	155	2	ALONG GUTTER
DPP-6	U-170	CB-71	92+19	-33.30	CB-69	90+62	-32.20	4	155	2	ALONG GUTTER
DPP-6	U-171	CB-74	93+00	34.00	CB-72	92+19	33.30	4	79	2	ALONG GUTTER
DPP-6	U-172	CB-73	93+00	-34.00	CB-71	92+19	-33.30	4	79	2	ALONG GUTTER
DPP-6	U-173	CB-78	94+35	35.00	CB-74	93+00	34.00	4	133	2	ALONG GUTTER
DPP-6	U-174	CB-75	94+35	-35.00	CB-73	93+00	-34.00	4	133	2	ALONG GUTTER
DPP-6	U-175	CB-80	95+97	36.00	CB-78	94+35	35.00	4	160	2	ALONG GUTTER
DPP-6	U-176	CB-79	95+97	-36.00	CB-75	94+35	-35.00	4	160	2	ALONG GUTTER
DPP-6	U-177	CB-82	97+79	36.50	CB-80	95+97	36.00	4	180	2	ALONG GUTTER
DPP-6	U-178	CB-81	97+79	-36.50	CB-79	95+97	-36.00	4	180	2	ALONG GUTTER
DPP-7	U-179	HIGH POINT	103+27	36.50	CB-91	102+17	36.50	4	108	2	ALONG GUTTER
DPP-7	U-180		99+10	-36.50	CB-81	97+79	-36.50	4	129	2	ALONG GUTTER
DPP-7	U-181	CB-83	99+00	58.00	CB-82	97+79	36.50	4	121	2	ALONG GUTTER
DPP-7	U-183	CB-91	102+17	36.50	CB-88	100+98	36.50	4	117	2	ALONG GUTTER
DPP-7	U-184	CB-90	102+17	-36.50	CB-86B	101+00	-52.00	4	116	2	ALONG GUTTER
DPP-7	U-185	HIGH POINT	103+27	-36.50	CB-90	102+17	-36.50	4	108	2	ALONG GUTTER
DPP-7	U-186	HIGH POINT	103+27	-36.50	CB-92	105+74	-31.00	4	245	2	ALONG GUTTER
DPP-7	U-187	HIGH POINT	103+27	36.50	CB-93	105+74	29.50	4	245	2	ALONG GUTTER
DPP-7	U-188	CB-93	105+74	29.50	CB-95	106+54	26.80	4	78	2	ALONG GUTTER
DPP-7	U-189	CB-92	105+74	-31.00	CB-94	106+54	-29.50	4	78	2	ALONG GUTTER
DPP-7	U-190	CB-95	106+54	26.80	CB-97	107+58	23.30	4	102	2	ALONG GUTTER
DPP-7	U-191	CB-96	107+58	-27.50	CB-94	106+54	-29.50	4	102	2	ALONG GUTTER
DPP-7	U-192	CB-97	107+58	23.30	CB-101	108+15	21.50	4	55	2	ALONG GUTTER
DPP-7	U-193	CB-96	107+58	-27.50	CB-100	108+15	-26.50	4	55	2	ALONG GUTTER
DPP-7	U-194	MH-52	108+95	18.00	CB-101	108+15	21.50	4	78	2	ALONG GUTTER
DPP-7	U-195	CB-102	109+25	-24.30	CB-100	108+15	-26.50	4	108	2	ALONG GUTTER
DPP-8	U-196		113+26	12.00	MH-52	108+95	18.00	4	429	2	ALONG GUTTER
DPP-8	U-197		113+26	-12.00	CB-102	109+25	-24.30	4	399	2	ALONG GUTTER
DPP-2		CB-1	44+77	-29.50	CL	44+77	0.00	4	27	2	CROSS ROAD
DPP-2		CB-3	44+72	29.50	CL	44+72	0.00	4	27	2	CROSS ROAD
DPP-3		CB-9	52+93	-29.50	CL	52+93	0.00	4	27	2	CROSS ROAD
DPP-3		CB-10	52+93	29.50	CL	52+93	0.00	4	27	2	CROSS ROAD
DPP-3		CB-11	53+08	-29.50	CL	53+08	0.00	4	27	2	CROSS ROAD
DPP-3		CB-12	53+08	29.50	CL	53+08	0.00	4	27	2	CROSS ROAD
DPP-3		CB-17	56+90	-29.50	CL	56+90	0.00	4	27	2	CROSS ROAD
DPP-3		CB-18	56+90	29.50	CL	56+90	0.00	4	27	2	CROSS ROAD
DPP-3		MH-13	59+70	36.50	CL	59+70	0.00	4	34	2	CROSS ROAD
DPP-3		CB-20	60+06	-29.50	CL	60+06	0.00	4	27	2	CROSS ROAD
DPP-4		CB-29	65+71	29.50	CL	65+71	0.00	4	27	2	CROSS ROAD
DPP-4		CB-33	66+27	-29.50	CL	66+27	0.00	4	27	2	CROSS ROAD
DPP-4		CB-35	67+47	-29.50	CL	67+47	0.00	4	27	2	CROSS ROAD
DPP-4											

RIPRAP SCHEDULE											
SHEET NO.	STRUCTURE NO.	STATION	OFFSET (-) LT/(+) RT	PIPE SIZE (IN)	APRON LENGT H (FT)	APRON WIDTH (FT)	RIPRAP AREA (SQ FT)	FILTER FABRIC AREA (SQ FT)	STONE RIPRAP, CLASS A3 (28100105)	FILTER FABRIC (28200200) (SQ YD)	
DPP-3	HW-1	51+12	44	18	6	5.5	33	52.5	3.7	5.8	
DPP-3	HW-2	54+10	42.5	18	6	5.5	33	52.5	3.7	5.8	
DPP-3	HW-3	54+30	50	15	16	6	84	136	9.3	15.1	
DPP-3	HW-5	55+29	40	30	6	6.5	39	59.5	4.3	6.6	
DPP-3	HW-6	59+05	42.5	15	16	6	84	136	9.3	15.1	
DPP-4	HW-10	67+10	49	15	16	6	84	136	9.3	15.1	
DPP-4	HW-11	67+41	-54.5	18	6	5.5	33	52.5	3.7	5.8	
DPP-4	HW-13	72+67	-57	12	14	6	70	120	7.8	13.3	
DPP-5	HW-15	81+98	58	24	18	8	108	190	12.0	21.1	
DPP-5	HW-16	82+12	49	24	8	6	48	72	5.3	8.0	
DPP-5	HW-17	84+96	50	18	16	10	88	204	9.8	22.7	
DPP-6	HW-18	87+20	48	15	18	5.25	94.5	137.75	10.5	15.3	
DPP-6	HW-19	87+90	52	18	24	5.5	132	187.5	14.7	20.8	
DPP-6	HW-20	89+37	50	15	16	5.25	84	123.25	9.3	13.7	
DPP-6	HW-21	90+50	51.5	15	16	5.25	84	123.25	9.3	13.7	
DPP-6	HW-22	92+08	53	15	14	5.25	73.5	108.75	8.2	12.1	
DPP-6	HW-23	92+90	48	18	10	5.5	55	82.5	6.1	9.2	
DPP-7	HW-24	107+06	43	18	16	5.5	88	127.5	9.8	14.2	
DPP-7	HW-25	108+90	30	18	16	5.5	88	127.5	9.8	14.2	
DPP-7	HW-26	109+25	-31	15	10	5.25	52.5	79.75	5.8	8.9	
SUBTOTAL =								162	257		

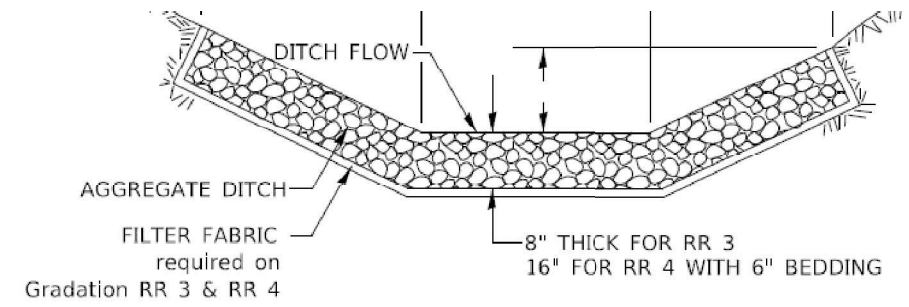

THIS WORK SHALL BE DONE IN ACCORDANCE WITH SECTION 281. AGGREGATE DITCH WILL BE MEASURED FOR PAYMENT IN PLACE AND THE AREA COMPUTED IN SQUARE YARDS OF ACTUAL SURFACE AREA. AGGREGATE DITCH WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD FOR STONE RIPRAP CLASS A3 OR STONE RIPRAP CLASS A4 THE FILTER FABRIC SHALL BE ACCORDING TO SECTION 282, FILTER FABRIC WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD FOR FILTER FABRIC.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

RIPRAP PLACEMENT DETAIL

MODEL: Underside in Schedule-2
FILE NAME: p:\projects\2020\transp\scorp\p01\Documents\Projects_2020\CAD\01\001200018\CAD\02 - Sheet\04\01_Sched\0162K33-SHT-DrainSchedules.dgn



USER NAME = vpelegrimas
PLOT SCALE = 0.16666633 1/ in.
PLOT DATE = 1/13/2026

DESIGNED - TSHINEZORIG
DRAWN - ADURAN
CHECKED - VPELEGRIMAS
DATE - 01/21/2026


REVISED -
REVISED -
REVISED -
REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


BARRINGTON ROAD
DRAINAGE SCHEDULES

SCALE: SHEET 8 OF 8 SHEETS STA. TO STA.


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	198
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

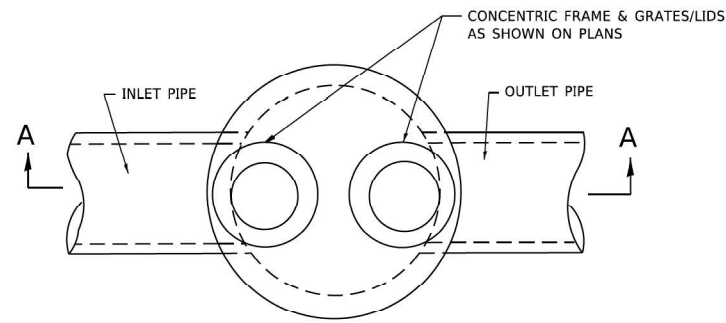

PLAN

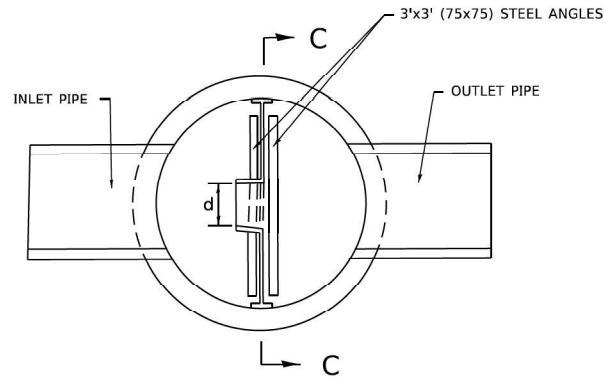

SECTION B-B

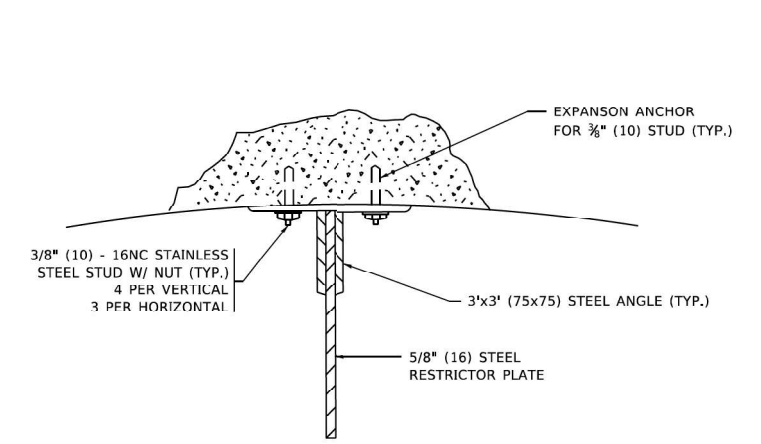


ANGLE FASTENER DETAIL

NOTES:


1. ALL STEEL ANGLES AND PLATES TO BE GALVANIZED AFTER FABRICATION.

BASIS OF PAYMENT:


1. TO BE PAID FOR AS "MANHOLES, TYPE A, 6 FT. (1.8 m)-DIAMETER, TYPE 1 FRAME, CLOSED LID, RESTRICTOR PLATE" EACH
2. ALL RESTRICTOR PLATES, ANGLES AND HARDWARE TO BE INCLUDED IN THE COST OF THE MANHOLE.

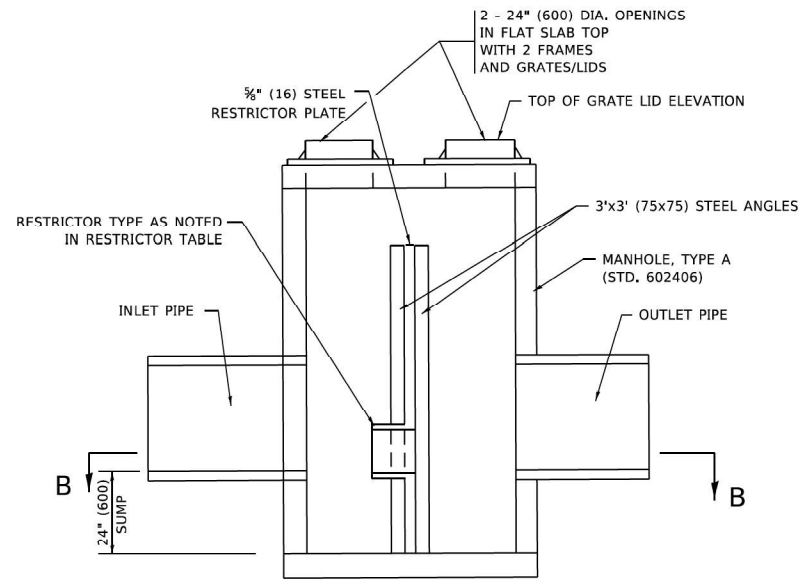

SECTION A-A

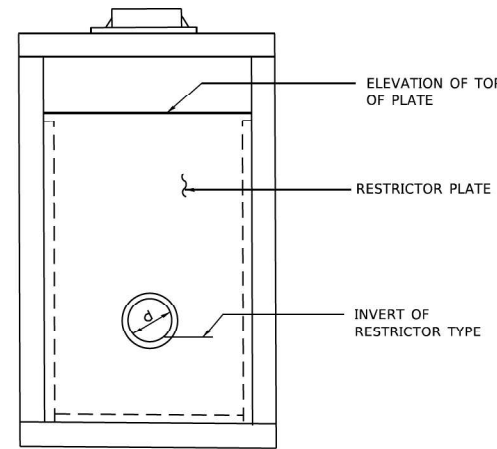


SECTION C-C

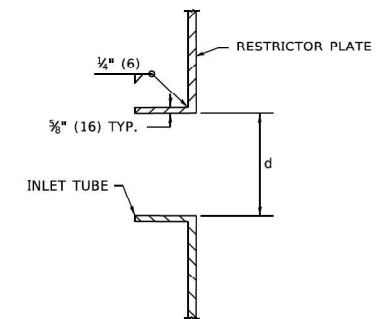

INLET TUBE DETAIL

STATION AND OFFSET	MANHOLE DIAMETER (ft.)	FRAME AND GRATE	RESTRICTOR TYPE	INSIDE RESTRICTOR TYPE DIAMETER in. (d)	INVERT OF RESTRICTOR TYPE	ELEVATION OF TOP OF PLATE OVERFLOW
44+65 45' RT	6'	TY 1 CL	TY 3	7.6	838.46	843.00
55+30 36' RT	6'	TY 1 CL	TY 3	13.8	845.18	847.75
67+41 40' LT	6'	TY 1 CL	TY 3	10.7	852.10	854.50
68+23 37' RT	6'	TY 1 CL	TY 3	14.6	852.28	854.28

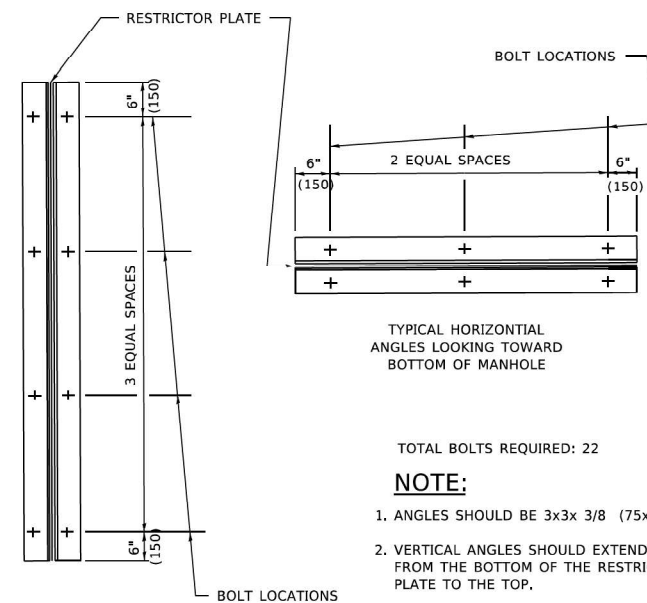

STEEL ANGLE BOLTING DETAILS

TYPICAL HORIZONTAL ANGLES LOOKING TOWARD BOTTOM OF MANHOLE

TOTAL BOLTS REQUIRED: 22

NOTE:

1. ANGLES SHOULD BE 3x3x 3/8 (75x75x75)
2. VERTICAL ANGLES SHOULD EXTEND FROM THE BOTTOM OF THE RESTRICTOR PLATE TO THE TOP.
3. HORIZONTAL ANGLES SHOULD EXTEND FROM VERTICAL ANGLE TO VERTICAL ANGLE.

RESTRICTOR TYPE					
1	2	3	4	5	6
RE-ENTRANT TUBE	SHARP EDGED	SQUARE EDGED	RE-ENTRANT TUBE	SQUARE EDGED	ROUNDED
LENGTH: 1/2 TO 1 DIA.		STREAM CLEARS SIDES	LENGTH: 2-1/2 DIA.	LENGTH: 2-1/2 DIA.	
C=.52	C=.61	C=.61	C=.73	C=.82	C=.98

VALUES OF "C" FOR CIRCULAR AND SQUARE ORIFICES

STEEL ANGLE BOLTING DETAILS

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

MODEL: Drainage Detail - 1
FILE NAME: p:\projects\2026\2026-01-13\2026-01-13-CAD\02_Sheet\2-20m Plan Profile\02\26\26-SHT-MHDetail



USER NAME = vpelegrimas
PLOT SCALE = 0.16666633 1/16 in.
PLOT DATE = 1/13/2026

DESIGNED - TSHINEZORIG
DRAWN - ADURAN
CHECKED - VPELEGRIMAS
DATE - 01/21/2026


REVISED -
REVISED -
REVISED -
REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


**BARRINGTON ROAD
DRAINAGE DETAIL**

SCALE: SHEET 1 OF 2 SHEETS STA. TO STA.


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	199
CONTRACT NO. 62K33				
ILLINOIS FED. AID PROJECT				

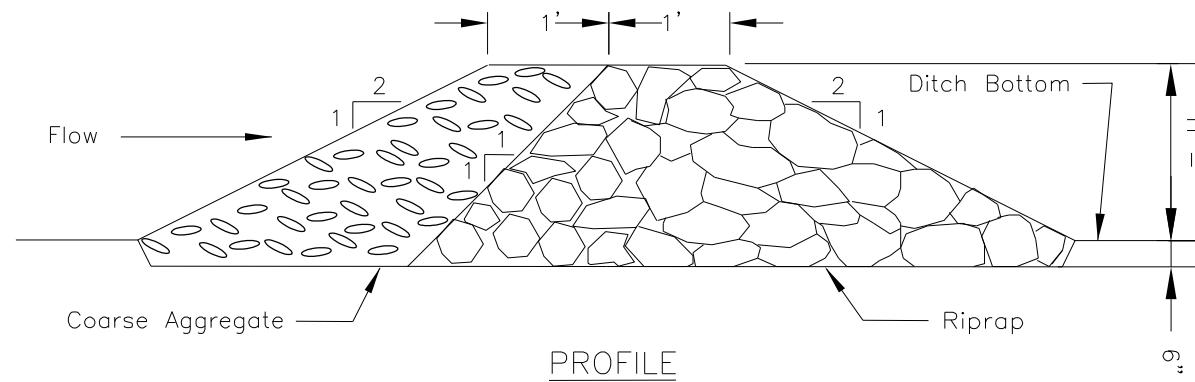

PROFILE

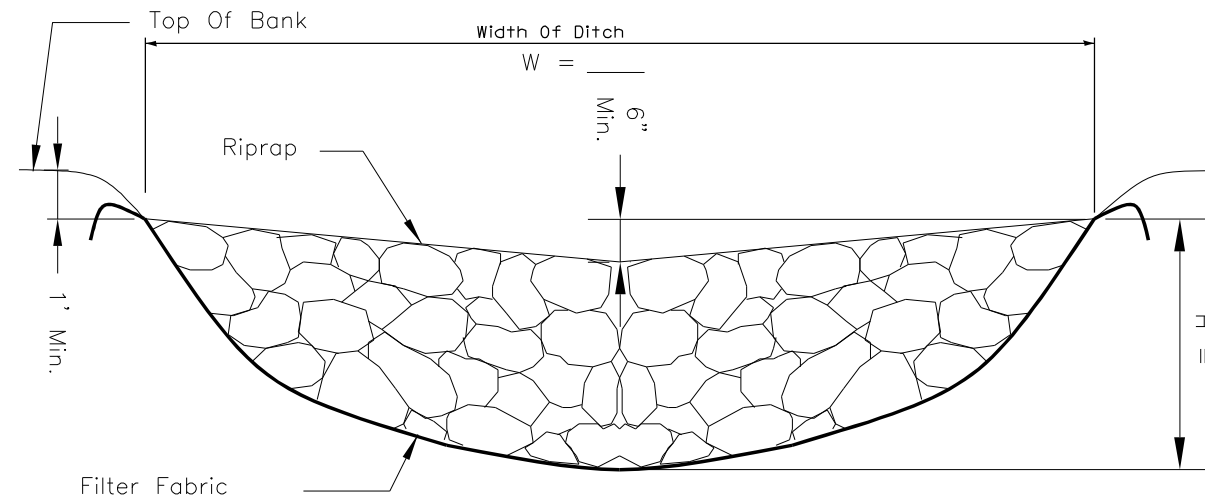

CROSS SECTION
CENTERLINE LOOKING DOWNSTREAM

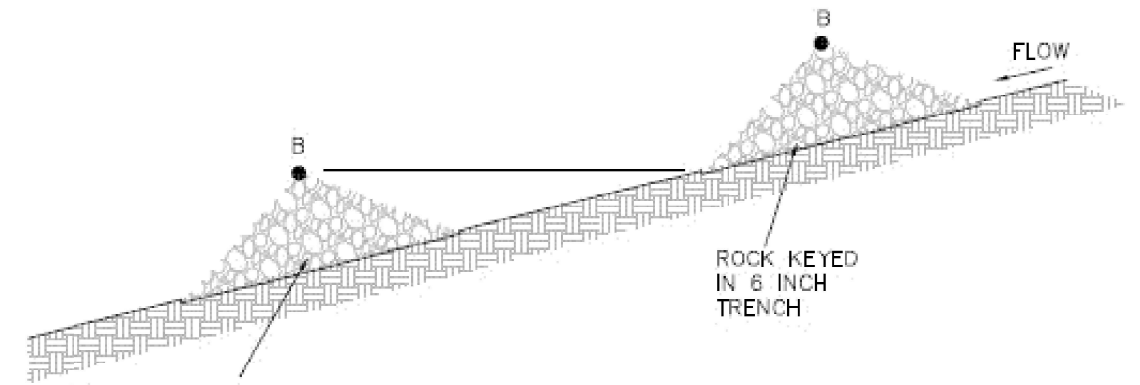

PLACE DOWNSTREAM
STRUCTURE SUCH THAT
POINT "B" IS
APPROXIMATELY LEVEL
WITH THE TOE ELEVATION
OF THE UPSTREAM
STRUCTURE

SPACING BETWEEN CHECK DAMS

ROCK DITCH CHECK

NOTES:

1. FILTER FABRIC SHALL MEET THE REQUIREMENTS OF MATERIAL ARTICLE 1080.03 OF THE STANDARD SPECIFICATIONS AND SHALL BE PLACED OVER THE CLEARED AREA PRIOR TO THE PLACING OF ROCK.
2. COARSE AGGREGATE SHALL BE CA-4 AND MEET MATERIAL GRADATION REQUIREMENTS OF SECTION 1004 OF THE STANDARD SPECIFICATIONS. THE COARSE AGGREGATE SHALL BE PLACED AND PAID ACCORDING TO SECTION 281 OF THE STANDARD SPECIFICATIONS.
3. RIPRAP SHALL BE QUALITY DESIGNATION A, IDOT GRADATION RR-4 AND SHALL MEET MATERIAL REQUIREMENTS OF SECTION 1005 OF THE STANDARD SPECIFICATIONS.
4. RIPRAP SHALL BE PLACED ACCORDING TO SECTION 281 OF THE STANDARD SPECIFICATIONS.
5. FOR ADDED STABILITY, THE BASE OF THE DITCH CHECK SHALL BE KEYED 6 INCHES INTO THE SOIL.
6. FILTER FABRIC SHALL BE INSTALLED ACCORDING TO SECTION 282 OF THE STANDARD SPECIFICATIONS.
7. SEE THE SCHEDULE THIS SHEET FOR SPACING DITCH CHECKS LOCATION

SIDE DITCH		FIRST DITCH CHECK STA.	SECOND DITCH CHECK STA.	NUMBER OF DITCH CHECKS	STONE RIPRAP, CLASS A3 (CU FT)	FILTER FABRIC (SQ FT)	STONE RIPRAP, CLASS A3 (CU YD)	STONE RIPRAP, CLASS A3 (TON)	FILTER FABRIC (SQ YD)
LEFT	RIGHT								
					PER DITCH CHECK	PER DITCH CHECK		28100205	28200200
	X	53+80	55+00	2	15.0	6.7	1.1	1.5	1.5
X			66+80	1	48.8	18.3	1.8	2.4	2.0
	X	82+30	82+90	2	33.0	10.0	2.4	3.3	2.2
	X	84+80	85+80	2	132.0	24.4	9.8	13.2	5.4
	X	89+20	91+80	2	130.1	23.7	9.6	13.0	5.3
							TOTAL =	34	17

DITCH CHECK SCHEDULE

MODEL: Drainage Details 2
 FILE NAME: p:\projects\2019-161-W\BARRINGTON\Drawings\2020\CAD\01\001\200018\CAD\02 - Sheet\13-Dm-Details\0162K33-SHT-DrainDetails



USER NAME = vpelegrimas
 PLOT SCALE = 0.16666000 * 1/ in.
 PLOT DATE = 1/13/2026

DESIGNED - TSHINEZORIG
 DRAWN - ADURAN
 CHECKED - VPELEGRIMAS
 DATE - 01/21/2026

REVISED -
 REVISED -
 REVISED -
 REVISED -

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

BARRINGTON ROAD
 DRAINAGE DETAILS

SCALE: NTS SHEET 2 OF 2 SHEETS STA. TO STA.

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
362	2019-161-W	COOK	666	200
CONTRACT NO. 62K33			ILLINOIS FED. AID PROJECT	