


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
PLANS FOR PROPOSED

SURFACE TRANSPORTATION PROGRAM

FAS ROUTE 924 (LICK CREEK ROAD)
SECTION 05-00094-00-RS
PROJECT NO. RS-924 (121)
JOB NO. C-99-517-05

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 924	05-00094-00-RS	UNION	11	1
PROJECT NO. RS-924 (121)			CONTRACT NO. 99256	



SUMMARY OF QUANTITIES

1000

CODE NO.	PAY ITEM	UNIT	TOTAL
X4066416*	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "C", N70	TON	4,860
X4066616*	BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19.0, N70	TON	1,270
X4066770*	LEVELING BINDER (MACHINE METHOD), SUPERPAVE N70	TON	4,420
40200800*	AGGREGATE SURFACE COURSE, TYPE B	TON	80
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	1,620
40600300	AGGREGATE (PRIME COAT)	TON	25
44000004	BITUMINOUS SURFACE REMOVAL 1"	SQ YD	1,861
44300100*	AREA REFLECTIVE CRACK CONTROL TREATMENT	SQ YD	1,661
48101200	AGGREGATE SHOULDERS, TYPE B	TON	2,660
67100100*	MOBILIZATION	L SUM	1
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	5,100
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	78,100
▲ 72000100	SIGN PANEL - TYPE 1	SQ FT	154.8
▲ 72800100	TELESCOPING STEEL SIGN SUPPORT	FOOT	462
▲ 78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	78,100
▲ 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	325


* SEE SPECIAL PROVISIONS

▲ SPECIALTY ITEMS

INDEX OF SHEETS

1. COVER SHEET
 2. TYPICAL SECTIONS
 3. RESURFACING SCHEDULE
 - 4.-9. PLAN SHEETS
 10. TYPICAL ENTRANCE & SIDE ROAD DETAILS
 11. MISCELLANEOUS DETAILS
- STANDARDS
- 701001-01 TRAFFIC CONTROL
 - 701006-02 TRAFFIC CONTROL
 - 701011-01 TRAFFIC CONTROL
 - 701301-02 TRAFFIC CONTROL
 - 701306-01 TRAFFIC CONTROL
 - 701311-02 TRAFFIC CONTROL
 - 701501-03 TRAFFIC CONTROL
 - 702001-06 TRAFFIC CONTROL DEVICES
 - 720001 SIGN PANEL MOUNTING DETAILS
 - 720006 SIGN PANEL ERECTION DETAILS
 - 780001-01 TYPICAL PAVEMENT MARKINGS
 - 781001-02 RAISED REFLECTIVE PAVEMENT MARKERS
 - BLR 24-1 MAILBOX TURNOUTS

UNION COUNTY

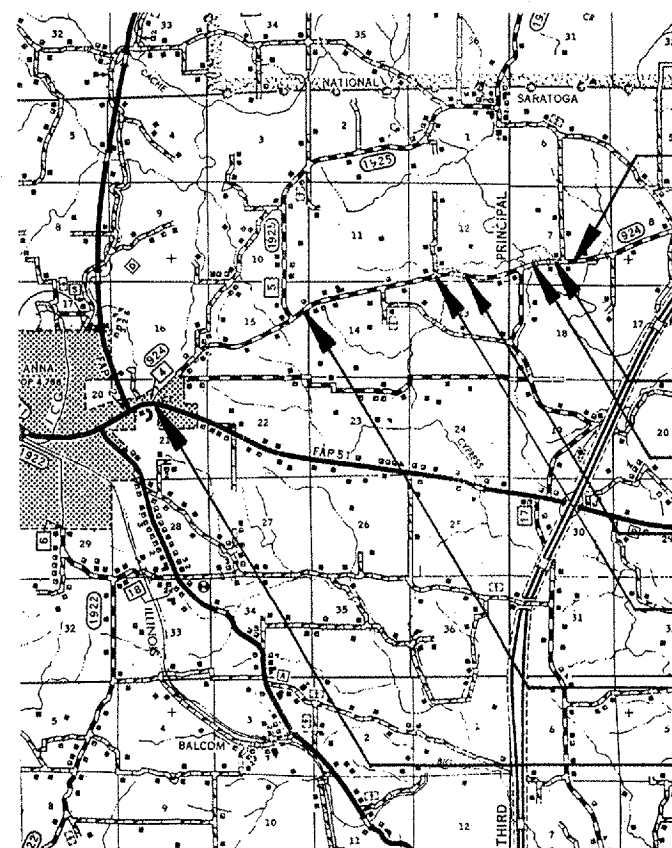

LOCATION MAP

SCALE: 1" = 2 MILES

NET LENGTH OF IMPROVEMENT = 25,208.96 FT. = 4.7744 MILES

CLASSIFICATION : COLLECTOR
ADT : 4300
DESIGN SPEED : 50 MPH



02/16/06

Edward W. Miller

Edward W. Miller
PROFESSIONAL ENGINEER
#062-025277
EXPIRES NOV. 30, 2007

CONTRACT NO. 99256

E. MILLER ENGINEERING, INC.
CONSULTING ENGINEERS
HARRISBURG, ILLINOIS

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

APPROVED 2-16-06
Bill R. Boyd P.E.
LOCAL AGENCY REPRESENTATIVE

PASSED 2/23/06
Dennis W. Hall
ENGINEER OF LOCAL ROADS AND STREETS

APPROVED 2-24-06
Mary C. Lamie
MARY C. LAMIE, P.E.
DEPUTY DIRECTOR OF HIGHWAYS
REGION FIVE ENGINEER