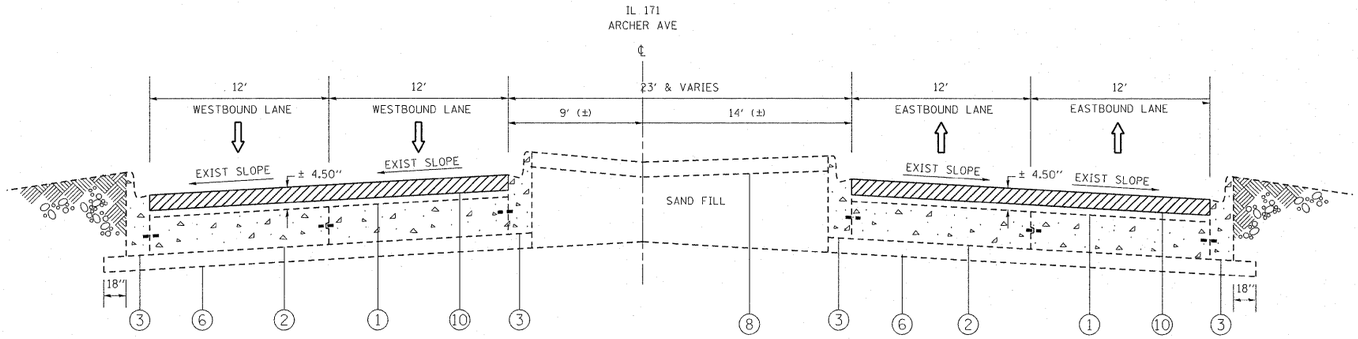

IL 171 (ARCHER AVE)
EXISTING TYPICAL SECTION
STA. 162+72 TO ROBERTS RD. INT.

LEGEND

1. EXISTING HMA SURFACING, ± 4.50"
2. EXISTING P.C. CONCRETE BASE COURSE, ± 9.50"
3. EXISTING COMB. CONC. CURB & GUTTER, TYPE B-6.24
4. EXISTING COMB. CONC. CURB & GUTTER, TYPE M-4.24
5. EXISTING HMA SHOULDER
6. EXISTING SUB-BASE GRANULAR MATERIAL, TYPE B, 4"
7. EXISTING AGGREGATE SHOULDER, TYPE B
8. EXISTING CONCRETE MEDIAN
9. * PROPOSED COMB. CONC. C&G REMOVAL AND REPLACEMENT
10. PROPOSED HMA SURFACE REMOVAL, 2-1/4"
11. PROPOSED POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
12. PROPOSED HMA SURFACE COURSE, MIX "D", N70, 1-1/2"
13. PROPOSED AGGREGATE WEDGE SHOULDER, TYPE B
14. PROPOSED GRADING AND SHAPING OF SHOULDERS

NOTE:

* LOCATIONS TO BE DETERMINED IN THE FIELD BY THE ENGINEER

" THE CONTRACTOR SHALL MILL FIRST PRIOR TO PATCHING".

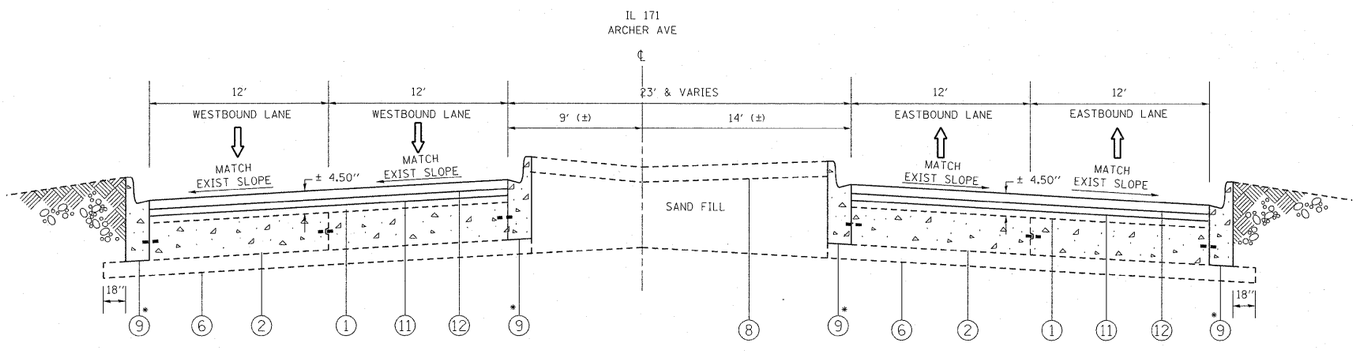

IL 171 (ARCHER AVE)
PROPOSED TYPICAL SECTION
STA. 162+72 TO ROBERTS RD. INT.

FILE NAME = c:\pw_work\pwidot\galbanjr\d0194557\D152310-sht-plan.dgn	USER NAME = galbanjr	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 50.0000 ' / IN.	CHECKED -	REVISED -
	PLOT DATE = 2/12/2011	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

IL 171 (ARCHER AVENUE)
EXISTING AND PROPOSED TYPICAL SECTIONS

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
3565	B-R-2-RS	COOK	37	9

CONTRACT NO. 60K54

ILLINOIS FED. AID PROJECT