


**NOTES**

1. FOR SYMBOL LIST AND ABBREVIATIONS, SEE SHEET LT-01.
2. UNIT DUCT, 600V, 4-1C NO.4, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE.
3. UNIT DUCT, 600V, 8-1C NO.4, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/2" DIA. POLYETHYLENE.
4. POLE SET-BACK SHALL BE MEASURED FROM THE BACK OF THE CURB TO THE CENTER OF THE POLE/BASE.
5. LIGHTING UNIT INSTALLED ON LIGHT POLE FOUNDATION, SPECIAL. SEE ROADWAY DETAILS AND SCHEDULE OF QUANTITIES.
6. UNIT DUCT, 600V, 4-1C NO.6, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE.
7. CONDUIT SHALL BE INSTALLED PUSHED.
8. POLE SHALL BE WIRED TO CITY OF NAPERVILLE CONTROLLER.
9. BOLT CIRCLE AND ANCHOR BOLTS NUMBER AND LAYOUT OF THE FOUNDATION SHALL MATCH THE RE-INSTALLED POLE.

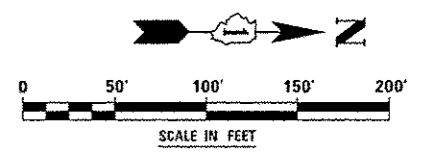

|  |   |  |   |   |   |
|--|---|--|---|---|---|
|  | DESIGNED <i>MCP</i><br>DRAWN <i>MLB</i><br>CHECKED <i>MCP</i><br>DATE <i>09/07/2012</i> | REVISED - ADDENDUM A 02/22/2013<br>REVISED -<br>REVISED -<br>REVISED - | <b>STATE OF ILLINOIS<br/>DEPARTMENT OF TRANSPORTATION</b> | <b>LIGHTING PLANS - ILLINOIS ROUTE 59</b> | F.A.P. RTE. 338<br>SECTION (112 & 113) WRS-6<br>COUNTY DUPAGE<br>TOTAL SHEETS 734<br>SHEET NO. 480<br>CONTRACT NO. 60R31<br>ILLINOIS FED. AID PROJECT |
|  |   |  | SCALE: AS SHOWN   SHEET NO. 4 OF 8 SHEETS   STA. TO STA.  |   |   |