06-12-2020 LETTING ITEM 107

0

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A. SECTION COUNTY TOTAL SHEET NO.

VAR. D9 ELECTRICAL REPAIR 2020-1 VARIOUS 4 1

BLUMBUS CONTRACT NO. 78746

FOR INDEX OF SHEETS, SEE SHEET NO. 3
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 4

PROPOSED HIGHWAY PLANS

VARIOUS ROUTES
SECTION D9 ELECTRICAL REPAIR 2020-1

ELECTRICAL REPAIR VARIOUS COUNTIES

C-99-089-19

PERRY IN A MILITO M

WHITE

WAS ON

SAINE

SAINE

SAINE

POPEHARDIN

POPEHARDI

J.U.L.I.E.

JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION 1-800-892-0123

OR 811

PROJECT ENGINEER: SUSAN POE PROJECT DESIGNER: SUSAN POE


CONTRACT NO. 78746

AD BAVESS STEPHENGON ORDERSAGO BOOKE OF HEARY LASE

CANDIGLE ORLESS STEPHENGON ORDERSAGO BOOKE OF HEARY LASE

CANDIGLE ORLESS OF HEARY ORLESS

D-99-054-19

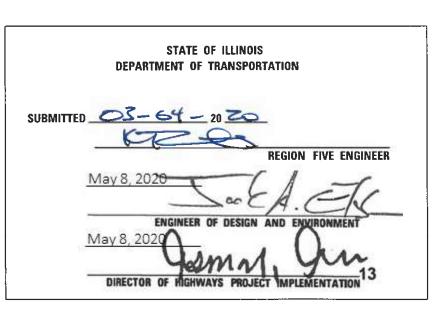

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

Prepared By: Claules Stein
DISTRICT STUDIES & PLANS ENGINEER

Examined By:

DISTRICT LAND ACQUISITION ENGINEER

Examined By:

Carrie Melsen DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By:

DISTRICT OPERATIONS ENGINEER

Examined By:

DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By:

DISTRICT CONSTRUCTION ENGINEER

Examined By: Robert Graeff (AWH)
DISTRICT MATERIALS ENGINEER

FILE NAME :	USER NAME * poes)	DESIGNED -	REVISED -								F.A RTF.	SECTION	COUNTY	TOTAL SHEET SHEETS NO.
pw:\\planroom.dot.illinois.gov:PWIDDT\Gocu	tents/1807_Offices/District_9/Projects/Geome	L DRANN to\Geometrics\electrical.dgn	REVISED -	STATE OF ILLINOIS	SIGNATURE SHEET		SIGNATURE SHEET			VAR. D9 ELECTRICAL REPAIR 2020-		VARIOUS		
1	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION							CONTRAC	CT NO. 78746		
Cefault	PLOT DATE = 2/20/2020	DATE -	REVISED -		SCALE:	SHEET	0F	SHEETS	STA.	TO STA.		ILLINOIS FED. AT	D PROJECT	

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	SIGNATURE SHEET
3	INDEX OF SHEETS, STANDARDS, AND GENERAL NOTES
4	SUMMARY OF QUANTITIES

STANDARDS

701001-02	OFF-RD OPERATIONS, 2L. 2W, MORE THAN 15' (4.5m) AWAY
701006-05	OFF-RD OPERATIONS, 2L, 2W, 15' (4.5m) TO 24'' (600mm) FROM PAVEMENT EDGE
701011-04	OFF-RD MOVING OPERATIONS, 2L. 2W. DAY ONLY
701101-05	OFF-RD OPERATIONS, MULTILANE, 15' (4.5m) TO 24'' (600mm) FROM PAVEMENT EDGE
701106-02	OFF-RD OPERATIONS, MULTILANE, MORE THAN 15' (4.5m) AWAY
701201-05	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45 MPH
701206-05	LANE CLOSURE, 2L, 2W, NIGHT ONLY, FOR SPEEDS > 45 MPH
701301-04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701401-12	LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-12	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701421-08	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS \geq 45 MPH TO 55 MPH
701422-10	LANE CLOSURE, MULTILANE, FOR SPEEDS > 45 MPH TO 55 MPH
701426-09	LANE LOSURE, MULTILANE, INTERMITTENT OR MOVING OPER., FOR SPEEDS > 45 MPH
701456-05	PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
701501-06	URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
701502-09	URBAN LANE CLOSURE, 2L, 2W, WITH BIDIRECTIONAL LEFT TURN LANE
701601-09	URBAN LANE CLOSURE, MULTILANE 1W, OR 2W WITH NONTRANSVERSABLE MEDIAN
701602-10	URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT TURN LANE
701606-10	URBAN LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701701-10	URBAN LANE CLOSURE, MULTILANE INTERSECTION
701901-08	TRAFFIC CONTROL DEVICES
701400-09	APPROACH TO LANE CLOSURE FREEWAY/EXPRESSWAY

GENERAL NOTES

THIS PROJECT IS LOCATED ON VARIOUS ROUTES WITHIN REGION 5, DISTRICT 9. THE WORK INCLUDED IN THIS SECTION CONSISTS OF MAINTAINING AND REPAIRING THE ELECTRICAL SYSTEMS AND ALL OTHER WORK NECESSARY TO COMPLETE THIS SECTION.

ALL WORK IS TO BE REPLACED IN KIND, AS INDICATED ON THE CONTRACT PLANS OR PROVISIONS.

THE LOCATIONS OF THE REPAIR AREAS SHALL BE DETERMINED BY THE ENGINEER.

REMOVAL OF DAMAGED MATERIALS WILL INCLUDE DISMANTLING, LOADING, HAULING AND DISPOSAL. THE WORK SITE WILL BE LEFT IN A SAFE AND ORDERLY CONDITION.

NO MATERIAL SHALL BE LEFT ON OR NEAR THE ROADWAY DURING NON-WORKING HOURS.

ANY NECESSARY TRAFFIC CONTROL WILL BE PROVIDED BY THE CONTRACTOR; APPROPRIATE STANDARDS ARE LISTED ON SHEET NO. 3.

ILLINOIS STATE LAW REINFORCES A 48-HOUR NOTICE TO BE GIVEN TO UTILITIES BEFORE DIGGING. FIELD MARKING OF FACILITIES MAY BE OBTAINED BY CONTACTING J.U.L.I.E. (PH. 800-892-0123) OR FOR NON-MEMBER, THE UTILITY COMPANY DIRECTLY. ILLINOIS DEPARTMENT OF TRANSPORTATION IS NOT A MEMBER OF THE JOINT UTILITY LOCATING INFORMATION FOR EXCAVATORS (J.U.L.I.E.) SYSTEM AND MUST BE CONTACTED DIRECTLY.

ENGLISH UNITS OF MEASUREMENT SHALL GOVERN OVER AND SUPERCEDE ANY METRIC UNITS IN THIS CONTRACT. WHERE INCLUDED, METRIC UNITS ARE FOR INFORMATION ONLY.

ELECTRONIC FILES AND/OR ELECTRONIC SURVEY INFORMATION INCLUDING CADD FILES WILL NOT BE AVAILABLE FOR THIS PROJECT.

ANY WORK ORDER MAY BE CANCELLED AT THE ENGINEERS DISCRETION.

- 5	FILE NAME :	USER NAME = possi	DESIGNED	REVISED -			INDEX	OF SHE	FTS GENI	RAI NOTE	\$	F.A.	SECTION	COUNTY	TOTAL SHEET
- 1	pw://planroom.dot.: linois.gov:PWIDDT/Cacu	ents/1007 Offices/District 9/Projects/Geome	DRAWN to Geometrics electrical dgn	REVISED -	STATE OF ILLINOIS	INDEX OF SHEETS, GENERAL NOTES,					VAR, D9 E	LECTRICAL REPAIR 2020-	VARIOUS		
-1		PLDT SCALE = 100.0000 ' / in.	CHECKED	REVISED -	DEPARTMENT OF TRANSPORTATION	SCALE: SHEET OF SHEETS STA. TO SYA.								CONTRAC	CT NO. 78746
L	Default	PLOT DATE = 2/20/2020	DATE	REVISED -									ILLINOIS FRO. A		

SUMMARY OF QUANTITIES

COUNTY:	VAR. COUNTIES
ROUTE:	VAR. ROUTES
FUNDING:	100% STATE
LOCATION:	RURAL / URBAN

	EGOATION. ITOIDIE	
ITEM DESCRIPTION	UNIT	ROADWAY
		0021
JOURNEYMAN ELECTRICIAN	HOUR	300
APPRENTICE ELECTRICIAN	HOUR	100
PICK-UP TRUCK	HOUR	250
BUCKET TRUCK (LENGTH LESS THAN 35 FEET)	HOUR	25
BUCKET TRUCK (LENGTH 35 TO 65 FEET)	HOUR	100
ARROWBOARD (TRAILER MOUNTED)	HOUR	10
ATTENUATOR, CRASH (TRUCK MOUNTED)	HOUR	10
	APPRENTICE ELECTRICIAN PICK-UP TRUCK BUCKET TRUCK (LENGTH LESS THAN 35 FEET) BUCKET TRUCK (LENGTH 35 TO 65 FEET) ARROWBOARD (TRAILER MOUNTED)	JOURNEYMAN ELECTRICIAN APPRENTICE ELECTRICIAN HOUR PICK-UP TRUCK HOUR BUCKET TRUCK (LENGTH LESS THAN 35 FEET) HOUR BUCKET TRUCK (LENGTH 35 TO 65 FEET) HOUR ARROWBOARD (TRAILER MOUNTED) HOUR

FILE NAME *	USER NAME poesi	DESIGNED -	REVISEO -						F.A.	SECTION	COUNTY	TOTAL S	SHEET NO.		
p=:\\plancoom.dot.illinois.gov:P#100	ThDocuments 1001 OfficeshDistrict 9\ProjectshGeom	c.DRAMMica\Geometrics\electrical.dgn	REVISED -	STATE OF ILLINOIS	SUMMARY OF QUANTITIES						VAR.	D9 ELECTRICAL REPAIR 2020-1	VARIOUS	4	4
	PLOT SCALE = 100.0000 1/ in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION									CONTRA	CT NO. 78	3746
Default	PLOT DATE = 2/20/2020	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA		ILLINOIS FED. A	D PROJECT		