
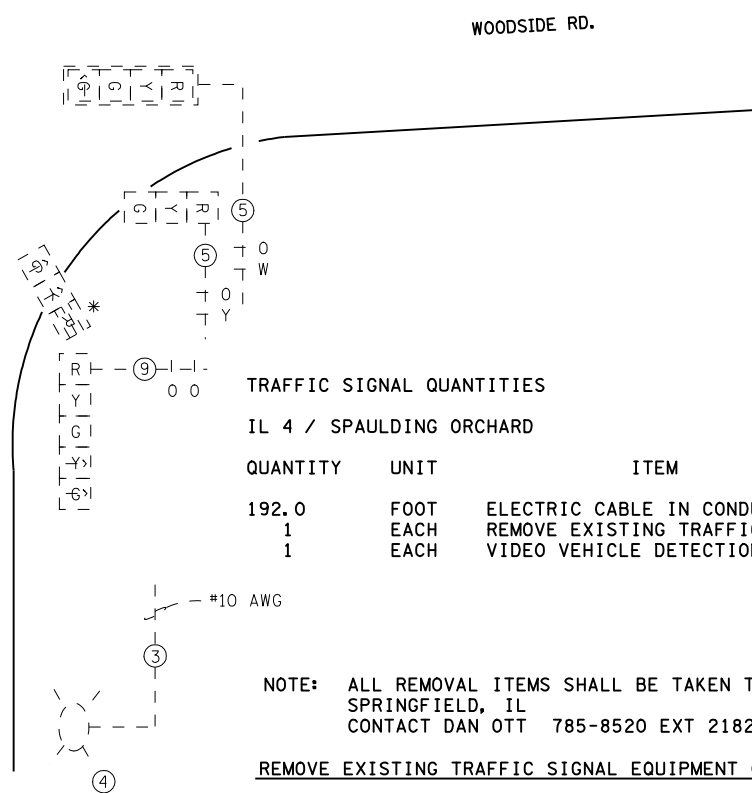


SPAULDING ORCHARD RD.

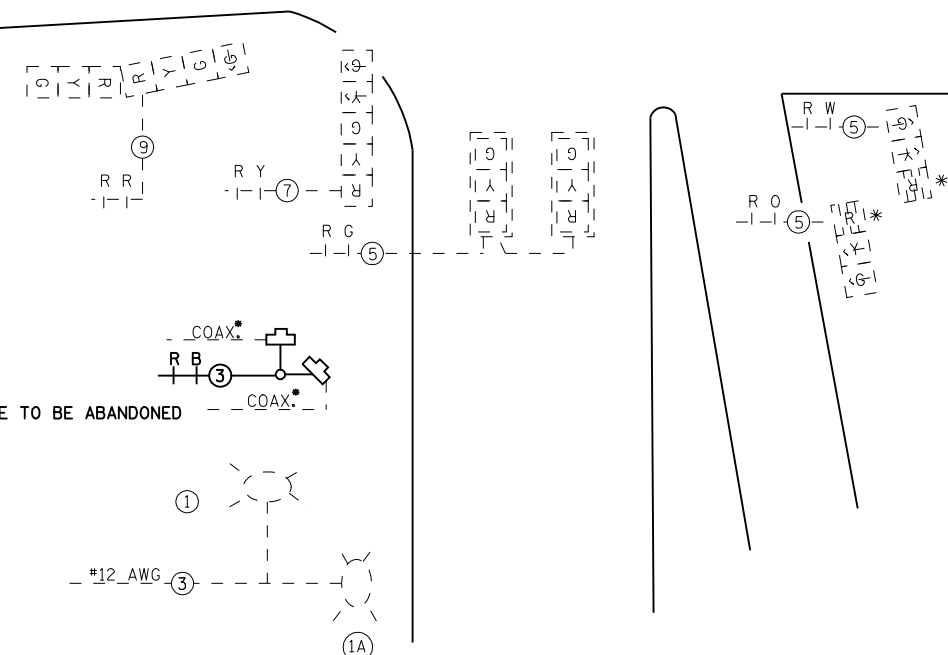

TRAFFIC SIGNAL QUANTITIES
IL 4 / SPAULDING ORCHARD

QUANTITY	UNIT	ITEM
192.0	FOOT	ELECTRIC CABLE IN CONDUIT, COMMUNICATION, NO. 18, 3/C
1	EACH	REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT
1	EACH	VIDEO VEHICLE DETECTION SYSTEM

NOTE: ALL REMOVAL ITEMS SHALL BE TAKEN TO CWLP
SPRINGFIELD, IL
CONTACT DAN OTT 785-8520 EXT 2182

REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT CONSISTS OF:

1	EACH	VIDEO DETECTION SYSTEM - AUTOSCOPE 2004
---	------	---

EXISTING COAXIAL CABLE SHALL BE ABANDONED. EXISTING AUTOSCOPE 3/C CABLE SHALL REMAIN IN PLACE TO THE MAST ARM BASE. MANUFACTURER'S SUPPLIED 3-WIRE CABLE SHALL BE SPLICED TO EXISTING CABLE AT BASE AND INSTALLED TO PROPOSED CAMERAS. SPLICE SHALL BE SOLDERED WITH A HEAT SHRINK WRAP IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS. PROPOSED CABLE AND SPLICING PAID FOR AS ELECTRIC CABLE IN CONDUIT, COMMUNICATION, NO. 18, 3/C

THE CONTRACTOR SHALL ONLY BE RESPONSIBLE FOR THE MAINTENANCE OF THE PROPOSED VIDEO VEHICLE DETECTION SYSTEM. THIS SHALL APPLY UNTIL THE SIGNAL FINAL ACCEPTANCE NOTICE IS ISSUED BY THE ENGINEER.

