FOR INDEX OF SHEETS, SEE SHEET NO. 2

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

. DI ASH BORER CONTROL 2019-5

D-97-031-19



STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

DIRECTOR OF HIGHWAYS PROJECT IMPLEME

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

REV. - MS

PROPOSED HIGHWAY PLANS

F.A.I. ROUTE 70 (I-70) **SECTION D7 ASH BORER CONTROL 2019–2** TREE REMOVAL **EFFINGHAM COUNTY**

C-97-045-19

PROJECT LOCATION:




FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

1-800-892-0123

PROJECT ENGINEER: DEBRA BARRETT PROJECT MANAGER: KYLE PRICE

PHONE: (217) 342-8244 CONTRACT NO. 74914

0

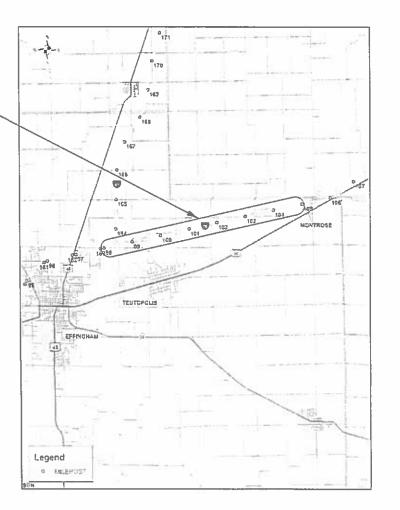

I-70 R.O.W. FROM M.P. 98 TO M.P. 105

JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION OR 811

INDEX OF SHEETS

SHEET NO.	TITLE
1	COVER SHEET
2	GENERAL NOTES, INDEX OF SHEETS, LIST OF STANDARDS
3	SUMMARY OF OUANTITIES

THE FOLLOWING STANDARDS ARE A PART OF THESE PLANS AND ARE INCLUDED AFTER SHEET 3:

000001-07	STANDARD SYMBOLS, ABBREVIATIONS, AND PATTERNS
701101-05	OFF-ROAD OPERATIONS, MULTILANE, 15' TO 24" FROM PAVEMENT EDGE
701106-02	OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' FROM EDGE OF PAVEMENT
701426-09	LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATION, FOR SPEEDS ≥ 45 MPH
701901-08	TRAFFIC CONTROL DEVICES

GENERAL NOTES

THE WORK INCLUDED IN THIS CONTRACT CONSISTS OF TREE REMOVAL, SEEDING, AND TRAFFIC CONTROL.

ALL TREES CUT DOWN SHALL BE REMOVED FROM THE STATE RIGHT OF WAY AND DISPOSED OF PER SECTION 201 OF THE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" AND THE CONTRACT SPECIAL PROVISIONS.

ALL TREE REMOVAL WILL BE ON THE EASTBOUND, WESTBOUND, AND IN THE MEDIAN OF THE I-70 RIGHT OF WAY BETWEEN M.P. 98 AND M.P. 105. ALL TREES TO BE REMOVED WILL BE MARKED BY DISTRICT 7 OPERATIONS.

THIS PROJECT HAS AN URBAN/RURAL SPLIT. M.P. 98 TO M.P. 98.48 IS URBAN. M.P. 98.48 TO M.P. 105 IS RURAL.

THE CONTRACTOR SHALL NOTIFY DISTRICT 7 OPERATIONS AT 217-342-8265 THIRTY DAYS PRIOR TO THE START OF THE PROJECT.

REV. - MS

* D7 ASH BORER CONTROL 2019-2

USER NAME = steffenmk	DESIGNED -	REVISED -	
	DRAWN -	REVISED -	
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -	D
PLOT DATE = 3/13/2019	DATE -	REVISED -	

SCALE:

	SUMMARY OF QUANTITIES	JIAIL	CONSTRUCTION TYPE CODE				
CODE NO	ITEM UP QUANTITIES	UNIT	TOTAL QUANTITIES	0031 URBAN	0031 RURAL		
0002 110	112.	j on i	GOARTITES				
20100110	TREE REMOVAL (6 TO 15 UNITS DIAMETER)	UNIT	3000	300	2700		
20100210	TREE REMOVAL (OVER 15 UNITS DIAMETER)	UNIT	3000	300	2700		
67100100	MOBILIZATION	L SUM	1	0.1	0.9		
		1 2 3 3					

* D7 ASH BORER CONTROL 2019-2

USER NAME = steffenmk	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -
PLOT DATE = 3/13/2019	DATE -	REVISED -

SCALE:

							D7 ASIT BOILER CONTROL 2019-2						
SUMMARY OF QUANTITIES				F.A.I. RTE	SECTION		COUNTY	TOTAL SHEETS	SHEET NO.				
				70	*		EFFINGHAM	3	3				
									CONTRACT	NO. 74	1914		
	SHEET 1	OF 1	SHEETS	STA.	TO STA.		ILLINOIS	EED ΔI	D PROJECT				