

193

F.A.P. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	140-B-BR)BDS	MASON	5	1
IL 78 IL 97 US 136 CONTRACT NO. 68E84				

INDEX OF SHEETS

1. COVER SHEET
2. COMMITMENTS & GENERAL NOTES
3. SUMMARY OF QUANTITIES
4. SCHEDULE OF QUANTITIES
5. ELEVATION & GENERAL PLAN

HIGHWAY STANDARDS

- 701001-02
- 701201-05
- 701301-04
- 701901-08




ADT = 5,600 SU=180 MU=500

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROPOSED HIGHWAY PLANS

FAP ROUTE 315(IL 78 /IL 97 /US 136)
SECTION (140-B-BR)BDS
PROJECT NHPP-25HE(161)
HAVANA BRIDGE
CONCRETE HEALER SEALER ¹
MASON COUNTY

C-94-031-19

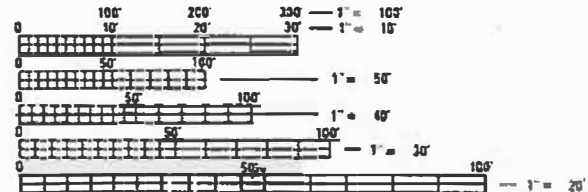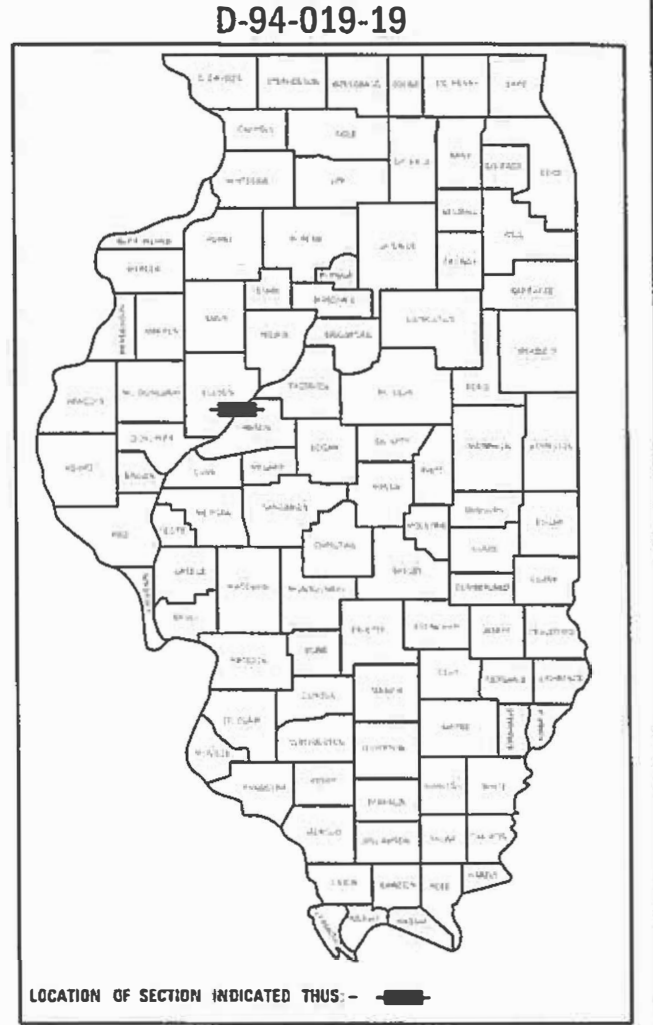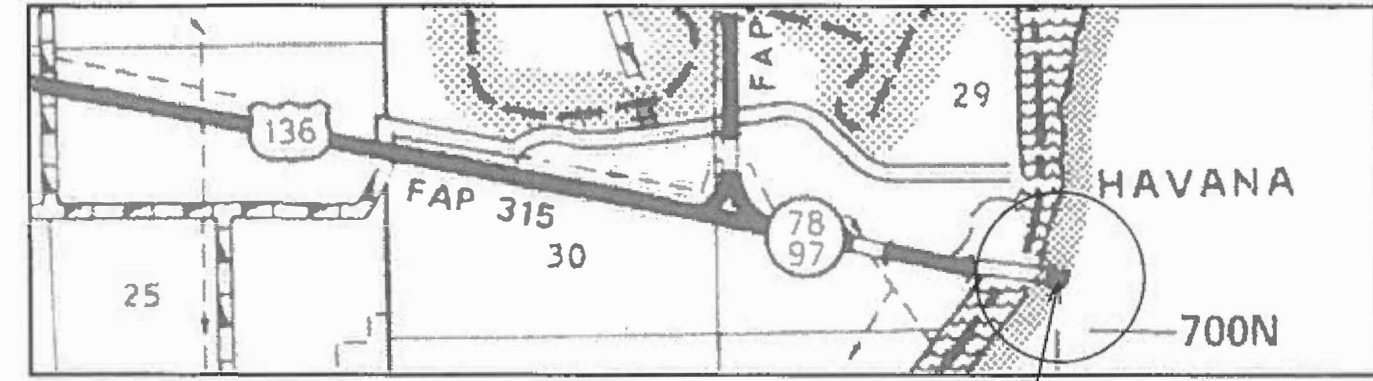

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATORS
1-800-892-0123
OR 811

THE WORK IS TO CONSIST OF AN APPLICATION OF HIGH MOLECULAR WEIGHT METHACRYLATE SEALER TO THE DECK OF THE HAVANA BRIDGE CARRYING US 136 /IL78 /IL97 OVER THE ILLINOIS RIVER (S.N. 063-0002) IN HAVANA.

PROJECT ENGINEER MIKE LEWIS (309)671-3454
PROJECT MANAGER JOHN APPENZELLER (309)671-3450

GROSS LENGTH = 1727 FT. = .33 MILE
NET LENGTH = 1727 FT. = .33 MILE

CONTRACT NO. 68E84 CAT. NO. 035719-00

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 21 2019
Donald Jones
REGIONAL ENGINEER

May 10 2019
[Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

May 10 2019
[Signature]
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE	
				MASON	FED/STATE
67100100	MOBILIZATION	L SUM	1	1	
70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	L SUM	1	1	
70107005	PAVEMENT MARKING BLACKOUT TAPE, 5"	FOOT	6904	6904	
70300150	SHORT TERM PAVEMENT MARKING REMOVAL	SQ FT	2877	2877	
X0324966	CONCRETE HEALER SEALER	SQ YD	5641	5641	

1

X0324966 CONCRETE HEALER SEALER

MODEL - MODEL NAME
FILE NAME - FILE

USER NAME = *USER*	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = *SCALE*	CHECKED -	REVISED -
PLOT DATE = *DATE*	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	(104-B-BR)BDS	MASON	5	3
IL78 / IL97 / US 136		CONTRACT NO. 68E84		
ILLINOIS FED. AID PROJECT				