
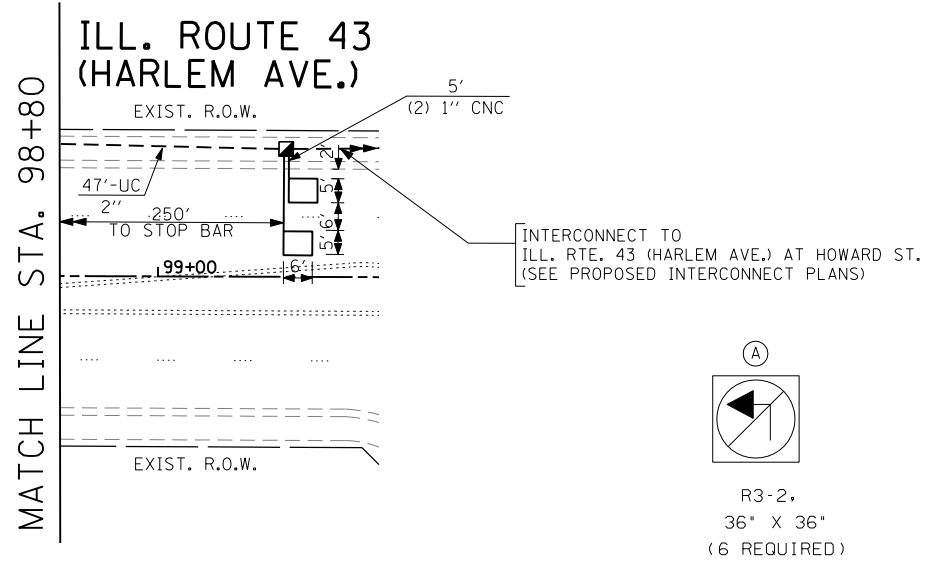


Restoration of Work Area. Restoration of the traffic signal work area shall be included in the related pay items such as foundation, conduit, handhole, trench and backfill, underground raceways, etc. All roadway surfaces such as shoulders, medians, sidewalks, pavement, etc. shall be replaced in kind. All damage to mowed lawns shall be replaced with an approved sod, and all damage to unmowed fields shall be seeded. All brick pavers disturbed in the work area shall be restored to their original configuration as directed by the Engineer. All damaged brick pavers shall be replaced with a comparable material approved by the Engineer. Restoration of the work area shall be included in the contract without any extra compensation allowed to the Contractor.

**CONSTRUCTION NOTES**

NOTE 1: ALL STREETScape WORK SHOWN IN "LIGHT GREY" WILL BE DONE "BY THE VILLAGE OF NILES" UNDER A SEPARATE CONTRACT. THE TRAFFIC SIGNAL CONTRACTOR SHALL COORDINATE CLOSELY WITH THE VILLAGE TO MINIMIZE CONFLICTS WITH THE STREETScape WORK DURING CONSTRUCTION.

NOTE 2: THE GENERAL CONTRACTOR IS REQUIRED TO HIRE AN ENVIRONMENTAL FIRM WITH AT LEAST FIVE (5) DOCUMENTED LEAKING UNDERGROUND STORAGE TANK CLEANUPS OR THAT IS PRE-QUALIFIED IN HAZARDOUS WASTE BY THE DEPARTMENT TO REMEDIATE THE SOIL CONTAMINATION AND MONITOR FOR WORKER PROTECTION.

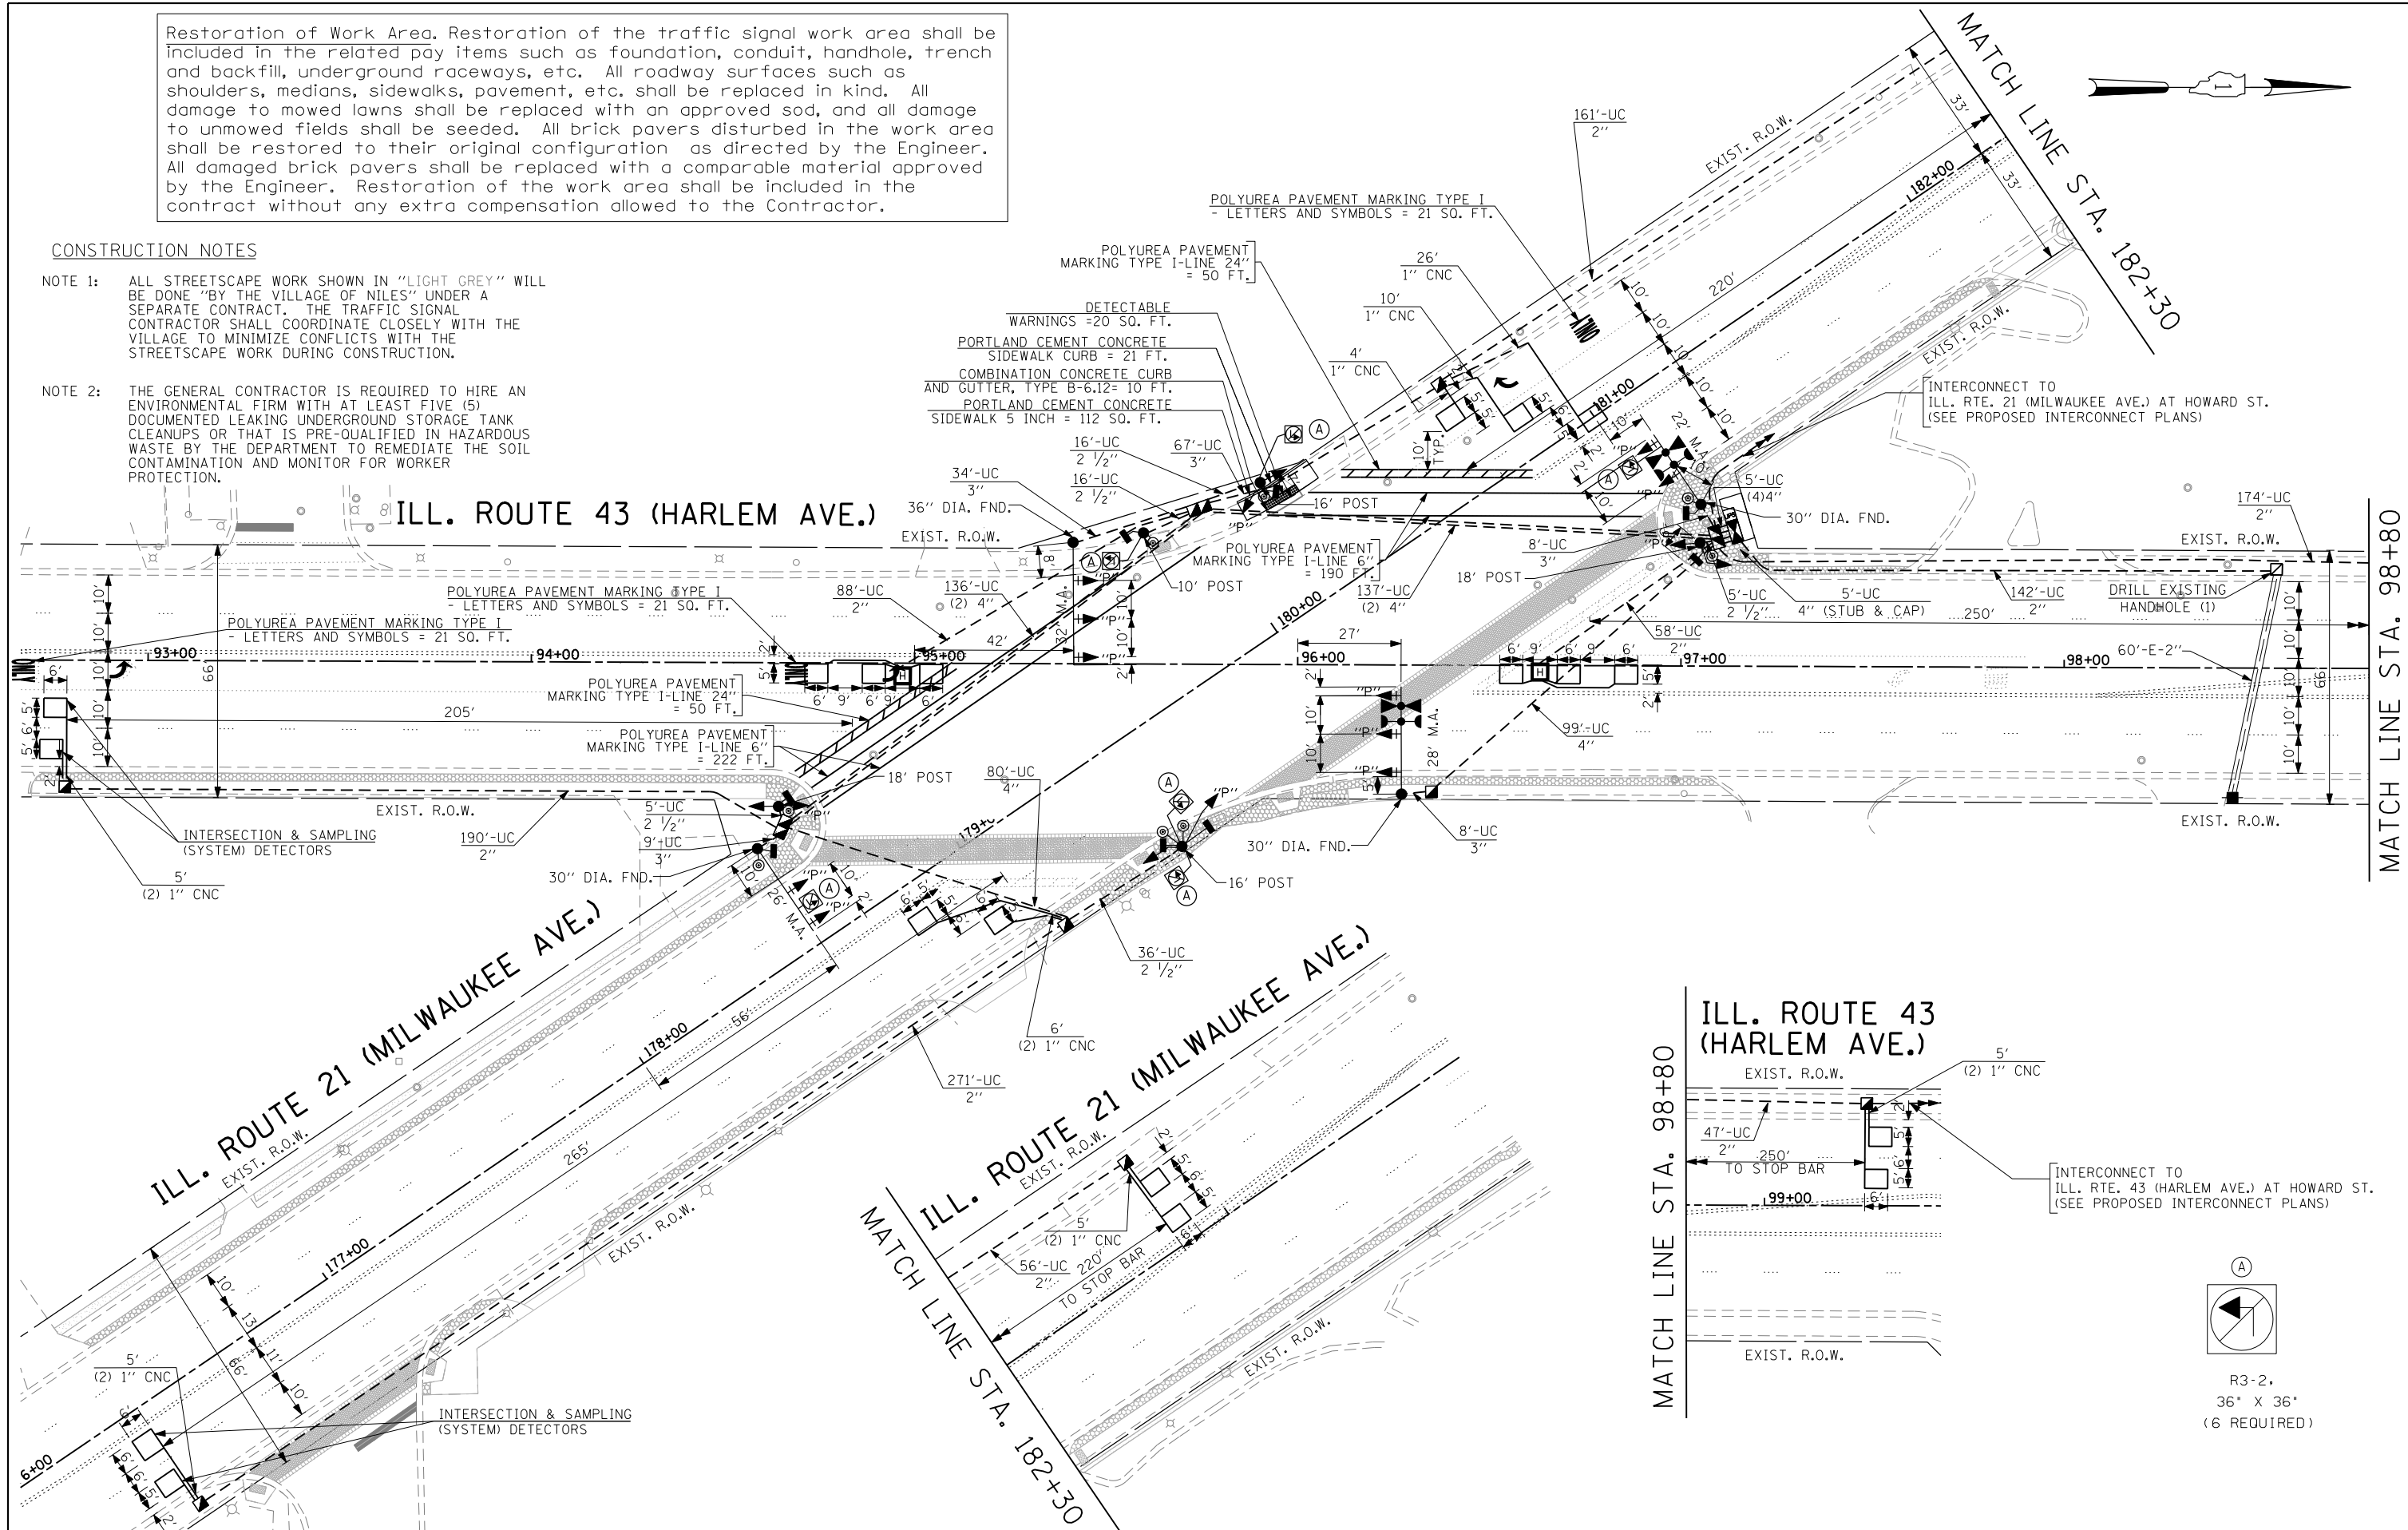

FILE NAME =	USER NAME = #USER#	DESIGNED - MA, PKG	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>PROPOSED TRAFFIC SIGNAL INSTALLATION PLAN ILL. RTE. 21 (MILWAUKEE AVE.) AT ILL. RTE. 43 (HARLEM AVE.)</b>			F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
#FILE#		DRAWN - EA, SM, MG	REVISED -		SCALE: 1"=20'	SHEET NO.	OF SHEETS	STA.	TO STA.	3513	2011-210-TS	COOK	089	017
		CHECKED - PKG	REVISED -								FINAL	CONTRACT NO. 60R44		
		DATE - 03/21/2012	REVISED -								FED. ROAD DIST. NO. -	ILLINOIS	FED. AID PROJECT	