© Copyright Hanson Professional Services Inc., 2012

HANSON

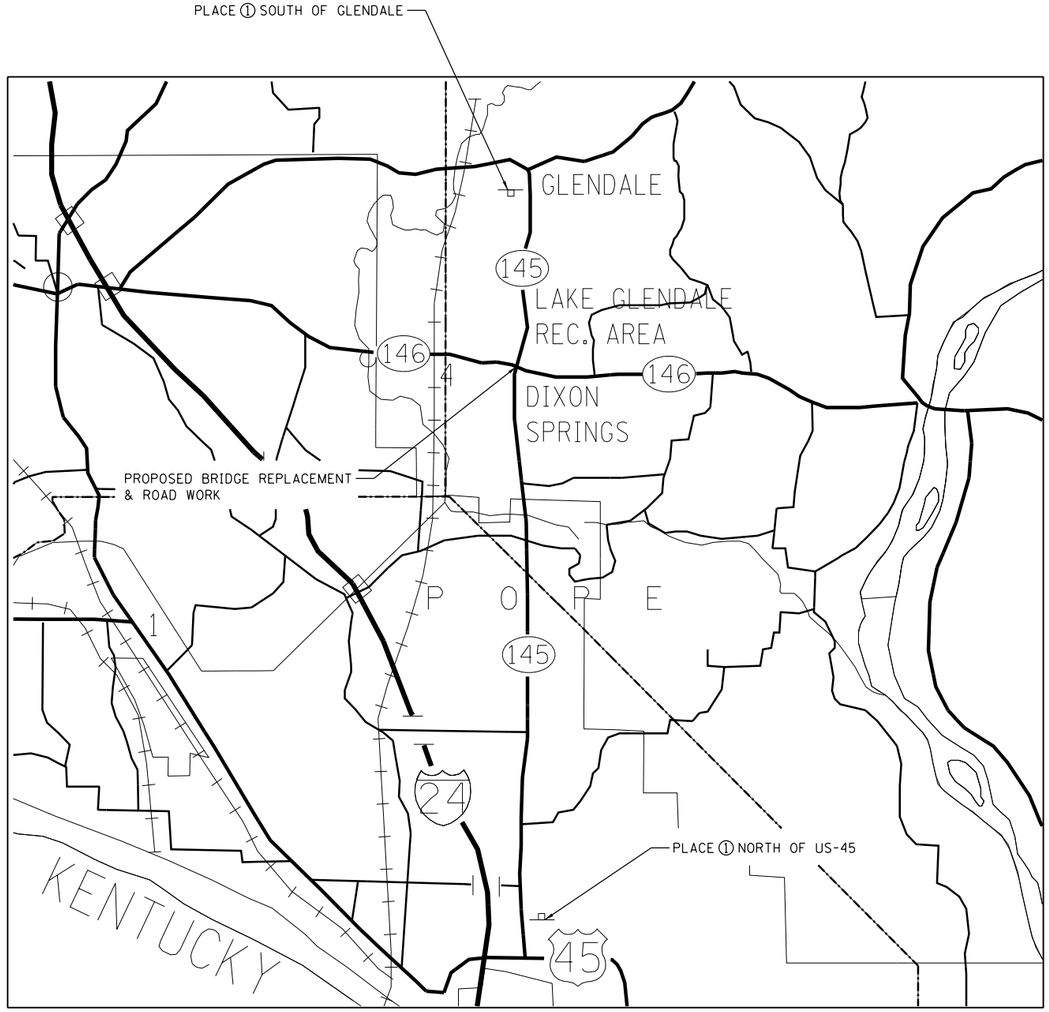

DETOUR SIGNING PLAN

SIGN LEGEND

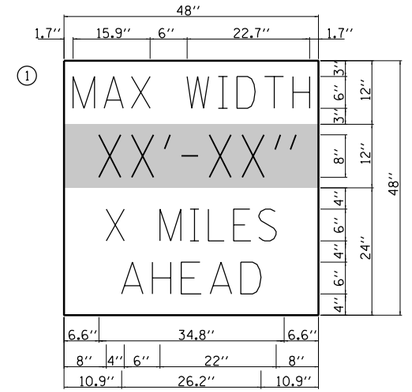

W12–I103

W12-I103 (WIDTH IS 8D):
NO BORDER, BLACK ON WHITE;
''MAX WIDTH'' D;
NO BORDER, BLACK ON ORANGE;
''XX'-XX'''' D;
NO BORDER, BLACK ON WHITE;
''X MILES'' D; ''AHEAD'' D

N

DETOUR NOTES:

1. THE CONTRACTOR SHALL FURNISH THE POSTS AND ERECT THE SIGNS AT THE LOCATIONS AS DIRECTED BY THE ENGINEER, ALL SIGNS SHALL BE POST MOUNTED.
2. THE ABOVE NOTED WORK, INCLUDING SIGNS, POSTS, HARDWARE, AND LABOR SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE, EACH, FOR TRAFFIC CONTROL AND PROTECTION, STD 701321 AND NO OTHER COMPENSATION WILL BE ALLOWED.
3. THE WIDTH SHOWN ON THE W12-I103 SIGN DURING IL-145 CONTRSTRUCTION SHALL BE 12'-0'' FOR STAGE I AND 12'-0'' FOR STAGE II OR AS DIRECTED BY THE ENGINEER. THE ''X'' MILES AHEAD WILL BE DETERMINED BY THE ENGINEER.

LAYOUT	DRAWN	REVIEWED

FILE NAME = c:\working\dms23830\D978134-sht-sign.dgn	USER NAME = brenn00248	DESIGNED - BKC	REVISED -
		DRAWN - BKC	REVISED -
MODEL = BRIDGE STAGE CONSTRUCTION	PLOT SCALE = 100.0000 '/ in.	CHECKED - MH	REVISED -
	PLOT DATE = 02\22\2012	DATE - 02/23/12	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

IL–145 (OVER IL–146) WIDE LOAD DETOUR SIGNING

SCALE: | SHEET NO. OF SHEETS | STA. | TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
132	103B-1	POPE	52	14
		CONTRACT NO. 78134		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		