

(217)465-4181


PROJECT ENGINEER: KENSIL GARNETT

SQUAD LEADER: CORY SHEEHY

DESIGNER: CORY SHEEHY

FAS ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1517	10B	DEWITT	26	1

CONTRACT NO. 70549
D-95-064-06

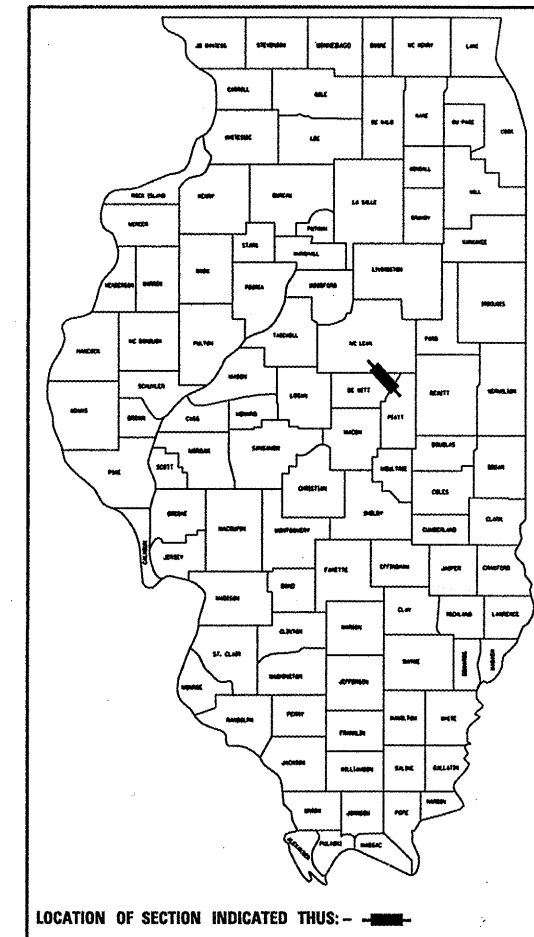


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
**PLANS FOR PROPOSED
HIGHWAY IMPROVEMENT**

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 4-5

**FAS ROUTE 1517 (US-150)
SECTION 10B
DEWITT COUNTY**

C-95-064-06
CULVERT REPLACEMENT

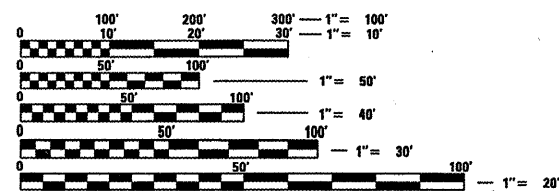


FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

DESIGN DESIGNATION
RURAL MAJOR COLLECTOR
ADT = 1200

PROPOSED STR. # 020-2013
PRECAST CONCRETE BOX CULVERT
DOUBLE 10' X 4' X 38'
W/ CAST IN PLACE
L-TYPE WINGWALLS
U. S. F. L. = 725.05
D. S. F. L. = 724.98
STA. 182+45

EXISTING STR. # 020-8038
TO BE REMOVED
CAST IN PLACE
CONCRETE BOX CULVERT
10' X 3'-6" X 34'
W/ CAST IN PLACE END SECTIONS
STA. 182+45

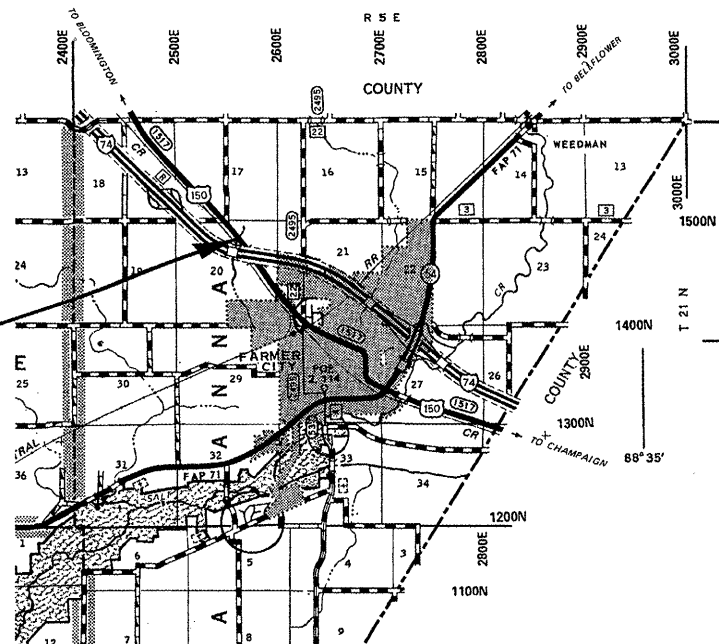

TOTAL LENGTH OF SECTION & PROJECT = 280.0 FEET = 0.053 MILES
NET LENGTH OF SECTION & PROJECT = 280.0 FEET = 0.053 MILES

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED 3/28 20 06
Joseph E. Crowe
DEPUTY DIRECTOR OF HIGHWAYS, REGION THREE ENGINEER

May 12, 20 06
Mike Hine
ENGINEER OF DESIGN AND ENVIRONMENT

May 12, 20 06
Milton R. Seo, P.E.
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

FOR UNDERGROUND UTILITY LOCATIONS CALL TOLL FREE J.U.L.I.E. TELEPHONE NO. 1-800-892-0123
SANTA ANNA TOWNSHIP

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED _____
DIVISION ADMINISTRATOR DATE

CONTRACT NO. 70549

DEWITT COUNTY SECTION 10B FAS ROUTE 1517

PRINTED BY AUTHORITY OF THE STATE OF ILLINOIS