

# SUMMARY OF QUANTITIES

					RURAL - HENRY
					0005
					NHPP
					90% FEDERAL
					10%STATE
CODE NUMBER	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE	
45100100	CRACK ROUTING (PAVEMENT)	FOOT	920,463		920,463
45100200	CRACK FILLING	POUND	460,232		460,232
67100100	MOBILIZATION	L SUM	1		1
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	12		12
70100800	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401	L SUM	1		1
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	49		49
70200100	NIGHTTIME WORK ZONE LIGHTING	L SUM	1		1
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	363,864		363,864
70300240	TEMPORARY PAVEMENT MARKING - LINE 6"	FOOT	45,483		45,483
70300250	TEMPORARY PAVEMENT MARKING - LINE 8"	FOOT	12,000		12,000
*	78008310	POLYUREA PAVEMENT MARKING TYPE II - LINE 4"	FOOT	363,864	363,864
*	78008330	POLYUREA PAVEMENT MARKING TYPE II - LINE 6"	FOOT	45,483	45,483
*	78008340	POLYUREA PAVEMENT MARKING TYPE II - LINE 8"	FOOT	12,000	12,000



\* SPECIALTY ITEMS

MODEL: Default  
 FILE: Main: P:\uplanroom.dat\illinois.gov\PIWDOT\Documents\DOT Offices\District 2\Projects\64M22\Program Development\Studies & Plans\Design\CADD\CAD\Sheets\02\_64M22-sht-details.dgn

USER NAME = karkir	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>SUMMARY OF QUANTITIES</b>				F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -		80	(37-4.5.6)CJS	HENRY	11	3				
PLOT DATE = 5/17/2019	DATE -	REVISED -		SCALE: SHEET OF SHEETS STA. TO STA.				CONTRACT NO. 64M22				
											ILLINOIS FED. AID PROJECT	

# SCHEDULE OF QUANTITIES

LOCATION	Remark	FOOT
Sta 1020 + 30 - 1041 + 56	Centerline WB	2,126
Sta 1041 + 56 - 1044 + 78	Bridge Omission over Geneseo Creek	
Sta 1044 + 78 - 1051 + 82	Centerline WB	704
Sta 1051 + 82 - 1056 + 48	Bridge Omission over Oakwood Ave.	
Sta 1056 + 48 - 1117 + 50	Centerline WB	6,102
Sta 1117 + 50 - 1247 + 50	Omission CL WB	
Sta 1247 + 50 - 1254 + 60	Centerline WB	710
Sta 1254 + 60 - 1256 + 83	Bridge Omission over Spring Creek.	
Sta 1256 + 83 - 1317 + 10	Centerline WB	6,027
Sta 1317 + 10 - 1318 + 54	Bridge Omission over 1900th Street.	
Sta 1318 + 54 - 1609 + 41	Centerline WB	29,087
Sta 1609 + 41 - 1613 + 21	Bridge Omission over Railroad.	
Sta 1613 + 21 - 1752 + 98	Centerline WB	13,977
Sta 1752 + 98 - 1755 + 42	Bridge Omission over Mud Creek.	
Sta 1755 + 42 - 1929 + 96	Centerline WB	17,454
Sub-Total Centerline WB		76,187
Sta 1020 + 30 - 1041 + 56	Inside Edgeline WB	2,126
Sta 1041 + 56 - 1044 + 78	Bridge Omission over Geneseo Creek	
Sta 1044 + 78 - 1051 + 82	Inside Edgeline WB	704
Sta 1051 + 82 - 1056 + 48	Bridge Omission over Oakwood Ave.	
Sta 1056 + 48 - 1254 + 60	Inside Edgeline WB	19,812
Sta 1254 + 60 - 1256 + 83	Bridge Omission over Spring Creek.	
Sta 1256 + 83 - 1317 + 10	Inside Edgeline WB	6,027
Sta 1317 + 10 - 1318 + 54	Bridge Omission over 1900th Street.	
Sta 1318 + 54 - 1424 + 80	Inside Edgeline WB	10,626
Sta 1424 + 80 - 1434 + 40	Concrete Crossover Omission	
Sta 1434 + 40 - 1609 + 85	Inside Edgeline EB	17,545
Sta 1609 + 85 - 1613 + 21	Bridge Omission over Railroad.	
Sta 1613 + 21 - 1752 + 98	Inside Edgeline WB	13,977
Sta 1752 + 98 - 1755 + 42	Bridge Omission over Mud Creek.	
Sta 1755 + 42 - 1929 + 96	Inside Edgeline WB	17,454
Sub-Total Inside Edgeline WB		88,271
Transverse Cracks-@110 ft/Lane per Station		
Sta 1020 + 30 - 1929 + 96	EB & WB 2 lanes +2 Lanes	400,250
Sub-Total Transverse EB & WB		400,250
<b>TOTAL</b>		<b>920,463</b>

**45100200 CRACK FILLING**

LOCATION	Remark	POUND
Sta 1020 + 30 - 1929 + 96	Outside Edgeline EB	44,588
Sta 1020 + 30 - 1929 + 96	Centerline EB	44,588
Sta 1020 + 30 - 1929 + 96	Inside Edgeline EB	44,108
Sta 1020 + 30 - 1929 + 96	Outside Edgeline WB	44,594
Sta 1020 + 30 - 1929 + 96	Centerline WB	30,094
Sta 1020 + 30 - 1929 + 96	Inside Edgeline WB	44,136
Sta 1020 + 30 - 1929 + 96	Transverse Cracks EB & WB	200,125
<b>TOTAL</b>		<b>460,232</b>

**70300220 TEMPORARY PAVEMENT MARKING - LINE 4"**


LOCATION	Remark	FOOT
Sta 1020 + 30 - 1929 + 96	Outside Edgeline EB & WB	181,932
Sta 1020 + 30 - 1929 + 96	Inside Edgeline EB & WB	181,932
<b>TOTAL</b>		<b>363,864</b>

**70300240 TEMPORARY PAVEMENT MARKING - LINE 6"**

LOCATION	Remark	FOOT
Sta 1020 + 30 - 1929 + 96	Centerline EB & WB	45,483
<b>TOTAL</b>		<b>45,483</b>

**70300260 TEMPORARY PAVEMENT MARKING - LINE 12"**

LOCATION	Remark	FOOT
Edgeline at ramps 12 ramps at 1000 feet each approx.TBD by Engineer		12,000
<b>TOTAL</b>		<b>12,000</b>

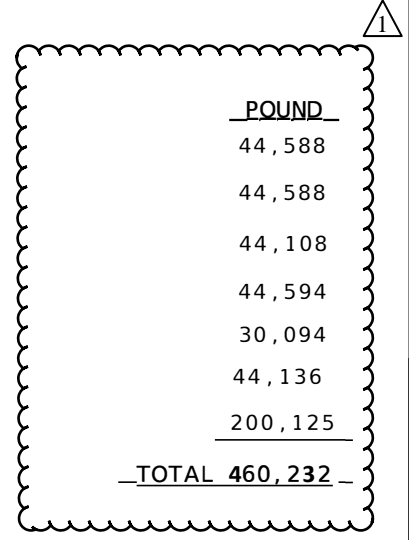

MODEL: C:\pilot\...  
 FILE: NAME: ...  
 MODEL: C:\pilot\...  
 FILE: NAME: ...

USER NAME = ka kllir DRAWN - CHECKED - DATE -	DESIGNED - DRAWN - CHECKED - DATE -	REVISED - REVISED - REVISED - REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>SCHEDULE OF QUANTITIES</b>	F.A.I. RTE. 80 SECTION (37-4.5.6)CJIS COUNTY HENRY TOTAL SHEETS 11 SHEET NO. 6	CONTRACT NO. 64M22 ILLINOIS FED. AID PROJECT
SCALE: SHEET OF SHEETS STA. TO STA.						