07-31-2020 LETTING ITEM 025 STATE OF ILLINOIS INDEX OF SHEETS **DEPARTMENT OF TRANSPORTATION COVER SHEET** GENERAL NOTES SUMMARY OF QUANTITIES TYPICAL SECTION SCOUR MITIGATION DETAILS TEMPORARY INFORMATION **PROPOSED HIGHWAY PLANS STANDARDS** STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS 000001-07 701001-02 OFF-ROAD OPERATIONS 2L, 2W, MORE THAN 15' (4.5 m) AWAY 701006-05 OFF-ROAD OPERATIONS 2L, 2W, 15' (4.5 m) TO 24" (600 mm) FROM F.A.S. ROUTE 248 (TILKILWA SPUR) 701201-05 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS ≥ 45 MPH 701301-04 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS 701901-08 TRAFFIC CONTROL DEVICES SECTION (117B)SCR **SCOUR MITIGATION BUREAU COUNTY** PROJECT LOCATION SN 006-0114 C-93-102-20 CARRYING FAS 248 (TISKILWA SPUR) **OVER BIG BUREAU CREEK** 0.30 MI NORTH OF TISKILWA ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED. JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION 1-800-892-0123 OR 811 PROJECT ENGINEER JOE KANNEL P.E. POINT LOCATION UNIT CHIEF RON WOODSHANK DISTRICT 3 NO. (815) 434-6131 CONTRACT NO. 66L16

0

F.A.S.
RTE. SECTION COUNTY TOTAL SHEET SHEETS NO.

248 (1178)SCR BUREAU * 5 1

ILLINOIS CONTRACT NO. 66L16

* 5 + 1 = 6 TOTAL SHEETS

D-93-068-20



FUNCTIONAL CLASSIFICATION

RURAL

MINOR COLLECTOR

F.A.S. ROUTE 248 (TISKILWA SPUR)

2017 ADT = 1050

P.V. 91.4% S.U. 6.7% M.U. 1.9%

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED

May 13th
20 20
REGIONAL ENGINEER

June 26, 2020
ENGINEER OF DESIGN AND ENVIRONMENT

June 26, 2020

DIRECTOR OF PROGRAMAYS PROJECT MEDICAL TOPA

DIRECTOR OF PROGRAMAN TOPA

DIRECTOR OF PROGR

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

PRICE BID FOR THE WORK.

PLAN DIMENSIONS AND DETAILS RELATIVE TO EXISTING PLANS ARE SUBJECT TO NOMINAL CONSTRUCTION VARIATIONS. THE CONTRACTOR SHALL FIELD VERIFY EXISTING DIMENSIONS AND DETAILS AFFECTING NEW CONSTRUCTION AND MAKE NECESSARY APPROVED ADJUSTMENTS PRIOR TO CONSTRUCTION OR ORDERING OF MATERIALS. SUCH VARIATIONS SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION FOR A CHANGE IN SCOPE OF WORK; HOWEVER, THE CONTRACTOR WILL BE PAID FOR THE QUANTITY ACTUALLY FURNISHED AT THE UNIT

BEDDING AND FILTER FABRIC SHALL NOT BE REQURED FOR THIS WORK.

THE CONTRACTORS CONSTRUCTION WORK SHALL NOT ENCROACH WITHIN A MINIMUM OF 10 FEET FROM THE EXPOSED GAS LINE AS SHOWN ON PLAN DETAILS.

SEEDING WILL NOT BE PERMITTED AT ANY TIME WHEN THE GROUND IS FROZEN, WET, OR IN AN UNTILLABLE CONDITION. LOCATIONS TO BE SEEDED WILL BE DETERMINED BY THE ENGINEER.

ABANDONED UNDERGROUND UTILITIES THAT CONFLICT WITH CONSTRUCTION SHALL BE DISPOSED OF OUTSIDE THE LIMITS OF THE RIGHT OF WAY ACCORDING TO ARTICLE 202.03 OF THE STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER. THIS WORK WILL NOT BE PAID FOR SEPARATELY, BUT WILL BE INCLUDED IN THE COST OF RELATED CONSTRUCTION TIEMS.

ALL EXCAVATED MATERIAL, WHICH INCLUDES DIGGING OR GRADING OF ANY SOIL OR FILL MATERIAL, WITH THE EXCEPTION OF AGGREGATE FILLS, MUST BE INCORPORATED WITHIN THE IDOT RIGHT OF WAY DUE TO ENVIRONMENTAL DOCUMENTATION REQUIREMENTS.

ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER SHOWN IN THE LIST OF STANDARDS OR THE COPY INCLUDED IN THESE PLANS.

THE FOLLOWING RATES OF APPLICATION HAVE BEEN USED IN CALCULATING PLAN QUANTITIES:

RIPRAP, CLASS A4	1.35	TONS / CU YD

THE CONTRACTOR SHALL CONTACT JULIE AT LEAST 48 HOURS PRIOR TO EXCAVATION TO DETERMINE WHICH UTILITIES ARE IN THE AREA.

MEMBERS OF JULIE KNOWN TO BE WITHIN THE LIMITS OF THE IMPROVEMENT ARE:

COMMITMENTS

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT THREE AS BUILT INFORMATION

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT THREE

SUPERVISING CONSTRUCTION FIELD ENGINEER

RESIDENT ENGINEER / TECHNICIAN

PREPARED BY:

DATE:

DISTRICT STUDIES & PLANS ENGINEER

START & END DATES OF CONSTRUCTION:

EXAMINED BY:

DISTRICT CONSTRUCTION ENGINEER

INSPECTORS:

SCALE:

DISTRICT MATERIALS ENGINEER

DISTRICT OPERATIONS ENGINEER

JSER NAME = mariniej DESIGNED -REVISED DRAWN REVISED HECKED REVISED PLOT DATE = 5/5/2020 REVISED DATE

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

SECTION COUNTY **GENERAL NOTES** BUREAU 6 2 248 (117B)SCR CONTRACT NO. 66L16 SHEET 1 OF 1 SHEETS STA. TO STA.

CONSTR. CODE


CONTRACT M	AINT.
100% STA	TE

				BR I DGE
CODE			TOTAL	0020
NO.	ITEM	UNIT	QUANT I TY	S.N. 006-0114
28100807	STONE DUMPED RIPRAP, CLASS A4	TON	570	570
67100100	MOBILIZATION	L SUM	1	1
70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	L SUM	1	1
Z0030850	TEMPORARY INFORMATION SIGNING	SQ FT	42	42

USER NAME = mariniej	DESIGNED -	REVISED -	
	DRAWN -	REVISED -	
PLOT SCALE = 3.9370 / mm	CHECKED -	REVISED -	
PLOT DATE = 5/5/2020	DATE -	REVISED -	

SCALE:


						F.A.S. RTE	SECTION		COUNTY	TOTAL SHEETS	SHEET NO.	
	SUMMARY OF QUANTITIES						248	(117B)SCR		BUREAU	6	3
										CONTRACT	NO. 66L	16
	SHEET	1	OF	1	SHEETS	STA.	TO STA.		ILLINOIS FED. AID PROJECT			

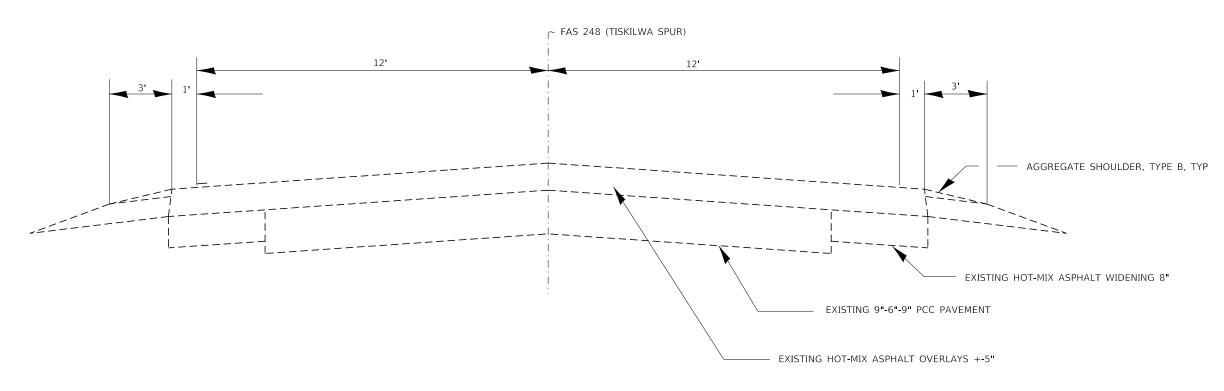


TYPICAL SECTION

USER NAME = mariniej	DESIGNED -	REVISED -	
	DRAWN -	REVISED -	
PLOT SCALE = 3.9370 / mm	CHECKED -	REVISED -	
PLOT DATE = 5/5/2020	DATE -	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

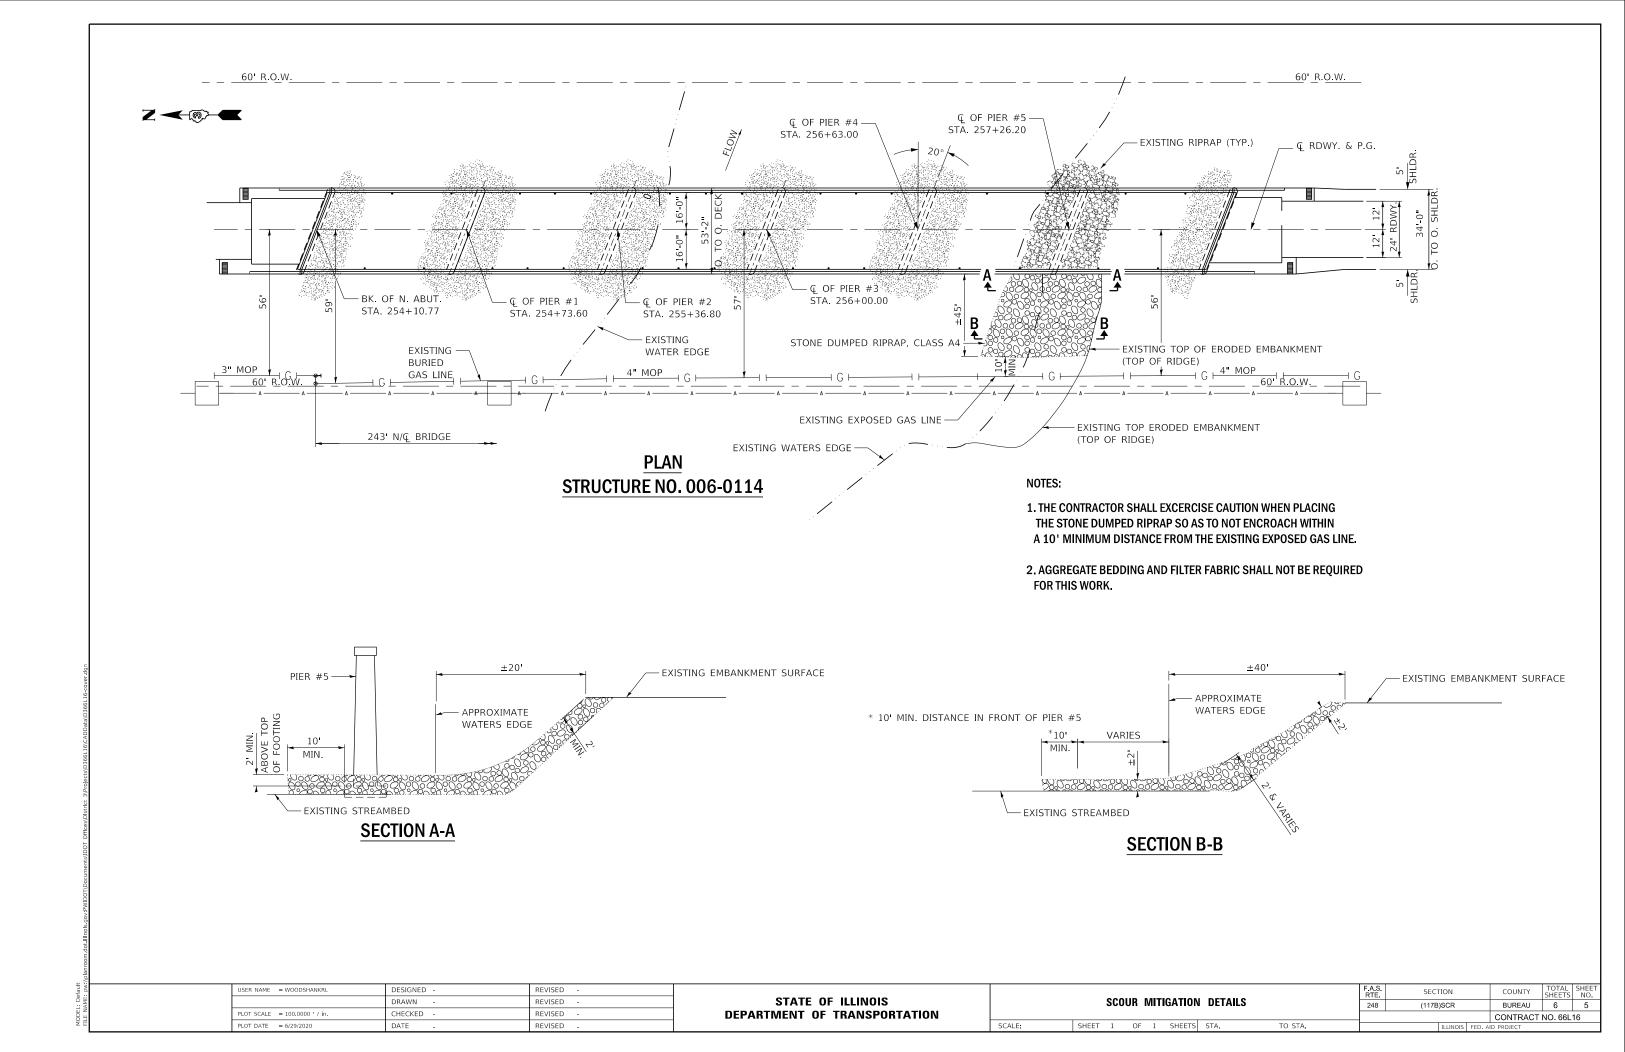

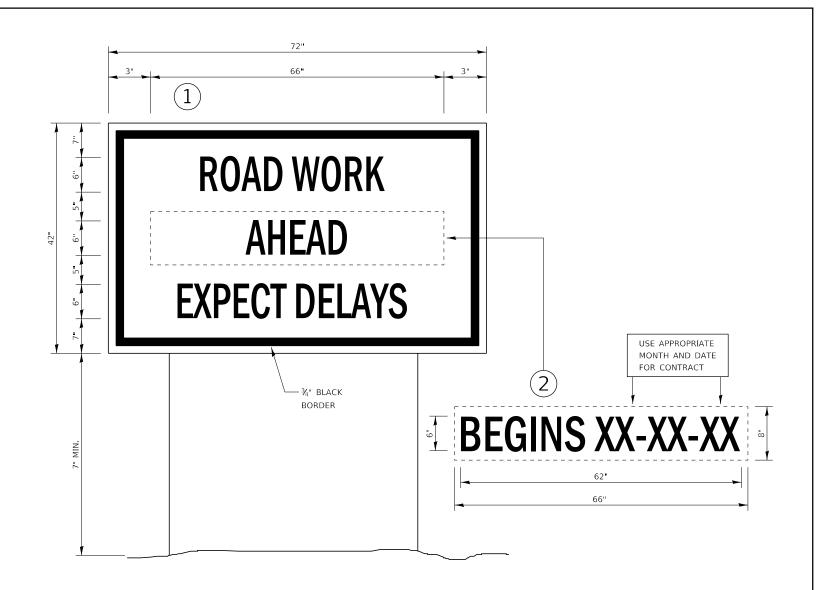

TEMPORARY INFORMATION SIGNING

NOTES:

- 1. USE 6" D BLACK LETTERING ON FLUORESCENT ORANGE BACKGROUND.
- ERECT SIGNS AT LOCATIONS IN ADVANCE OF THE "ROAD CONSTRUCTION AHEAD" SIGNS AS DIRECTED BY THE ENGINEER.
- 3. ERECT SIGN (1) WITH INSTALLED PANEL (2) A MINIMUM OF ONE WEEK PRIOR TO THE START OF THE LANE CLOSURE.
- 4. REMOVE PANEL ON THAT DATE.
- 5. SEE SPECIAL PROVISION "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
- 6. WILL BE PAID FOR PER SQ FT AS "TEMPORARY INFORMATION SIGNING". EACH SIGN = 21 SQ FT AND THE DATE PANEL WILL NOT BE MEASURED SEPARATELY FOR PAYMENT.

Γ	ILE NAME =	USER NAME = marinlej	DESIGNED - TG	REVISED -			F.A.	S. SECTION	COUNTY	TOTAL SHEET	
	w:\\planroom.dot.lllinois.gov:PWIDOT\Documents\IDOT (ffices\District 3\Projects\D366L16\CADData\D366L16-cover.dgn	DRAWN - TG	REVISED -	STATE OF ILLINOIS	TEMPORARY INFORMATION SIGNING		248	(117B)SCR	BUREAU	6 6
		PLOT SCALE = 4.3307 / mm	CHECKED - RW	REVISED -	DEPARTMENT OF TRANSPORTATION					CONTRA	ACT NO. 66L16
	Pefault	PLOT DATE = 5/5/2020	DATE - 4/24/2020	REVISED -		SCALE:	SHEET 1 OF 1 SHEETS STA. TO STA.		ILLINOIS F	ED. AID PROJECT	